

P5T Series

- Compact guided cylinder for short stroke applications
- 9 Bore sizes, 16mm to 200mm
- Strokes 10 to 100mm depending on model
- Standard dowel holes on body and tool plate
- High load bearing option
- Internal bumpers and magnetic piston are standard
- Flexible porting: top, rear, side



Operating information

Operating pressure:	1 MPa (145 PSIG / 10 bar)
Temperature range:	
Nitrile seals (standard)	0°F to 165°F (-18°C to 74°C)
Fluorocarbon seals*	0°F to 250°F (-18°C to 121°C)
	* See fluorocarbon seal option for high temperature applications.
Filtration requirements:	40 micron, dry filtered air

Ordering information

P5T	–	J	032	D	H	S	N	R	100	
Shaft / bearing type		Bore size		Seals		Options		Stroke length		
J	Composite bearing, chrome plated shaft (std)	016	16mm	S	Nitrile (std)	N	None (std)	See table below for standard stroke lengths. Consult factory for special stroke lengths.		
H	Ball bearing, stainless steel shaft	020	20mm	F	Fluorocarbon (high temp)	B	High load bearings ²			
C	Composite bearing, stainless steel shaft	025	25mm	Options		A	Bumpers, adjustable stop collars (extend only) and dual tool plate (side ports rec) ^{3,4}			
		032	32mm			E	Bumpers and adjustable stop collars (extend only) ³			
		040	40mm			G	High load bearings, bumpers and adjustable stop collars (extend only) ^{2,3}			
		050	50mm			D	Dual tool plate ^{3,4}			
		063	63mm			X	Special			
		080	80mm							
		100	100mm							
Port location / mounting				Port style		Rod lock and stroke type				
D	Dowel holes, top ports (std)			H	NPTF (std)	Blank	Standard stroke (std hsg), or special stroke (custom hsg)			
R	Dowel holes, rear ports, top plugged (std)			G	BSPP	R	Standard stroke (std hsg) with rod lock			
S	Dowel holes, side ports ¹ and top ports			P	Flow control, BSPP port, prestolok tube (mm) ¹	T	Special stroke (std hsg) ⁵			
				F	Flow control, NPTF port, prestolok tube (inch) ¹	B	Special stroke (std hsg) with rod lock ⁵			
				B	Flow control, BSPP ¹					
				N	Flow control, NPTF ¹					
Standard strokes (mm)*										
Bore size (mm)	10	25	40	50	75	100	125	150	175	200
16	•	•	•	•	•	•				
20		•	•	•	•	•				
25		•		•	•	•	•			
32-100		•		•	•	•	•	•	•	•

* Consult factory for special stroke lengths.

Sensors
 For sensors see page B339.

NOTES:

- 1 Cannot combine flow controls, side ports and 25mm stroke.
- 2 Not available with rear mounting and ports.
- 3 Not available with rear port location (R).
- 4 Includes high load bearings as standard.
- 5 Dimensions for special stroke length actuators will be the same as those of the next longest stroke actuator.

B
Guided Cylinders
Actuator Products

P5T Series

P5L Series


HB Series

P5E Series

Horizontal Load Capacity
Standard Unit


P5T Series units will have the same load capacity regardless of orientation. The graphs below show maximum load capacity based on a unit life of 10 million cycles.

EXAMPLE: A P5T-16 with “stroke + d” of 75mm and composite bushings would have a load capacity of 50N.

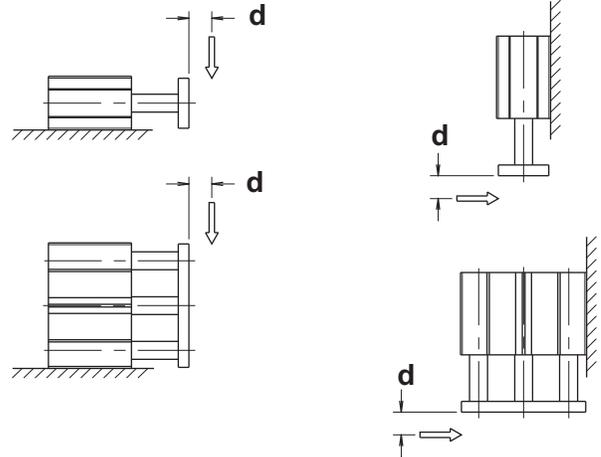


B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	HB Series
	P5E Series


16mm Bore Size

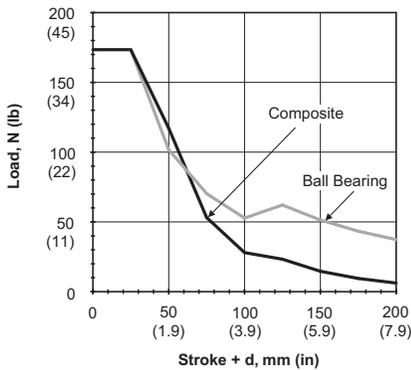


20mm Bore Size

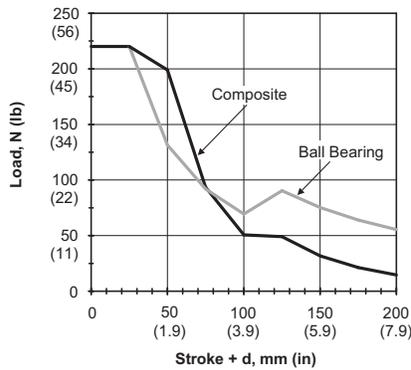


25mm Bore Size

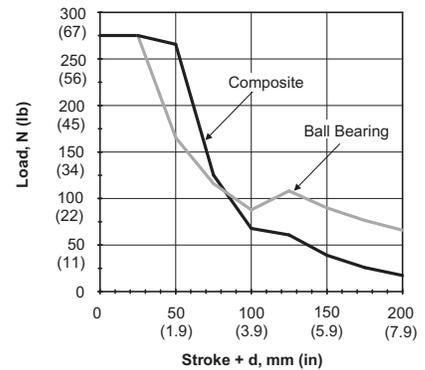


32mm Bore Size

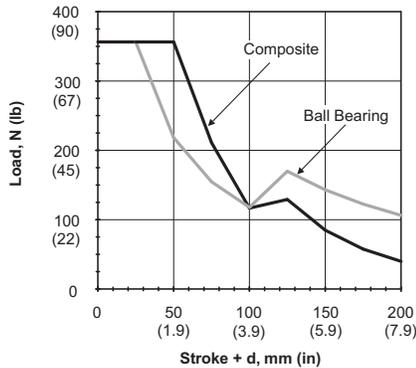


40mm Bore Size

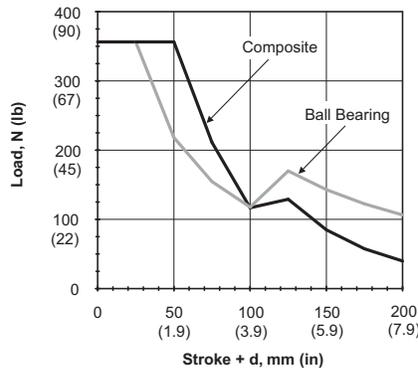


50mm Bore Size

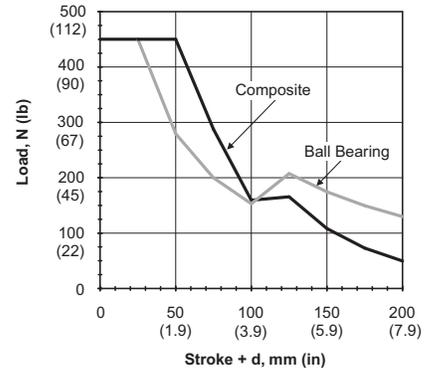


63mm Bore Size

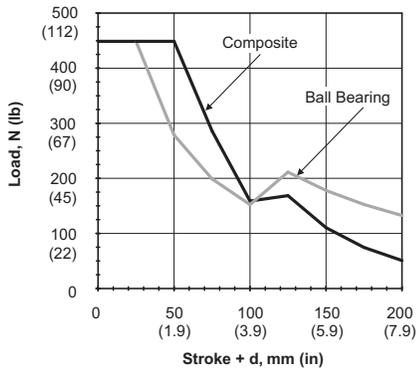

80mm Bore Size

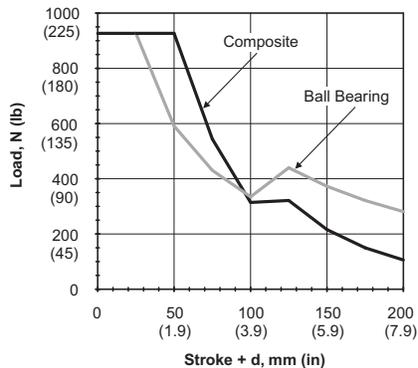

100mm Bore Size

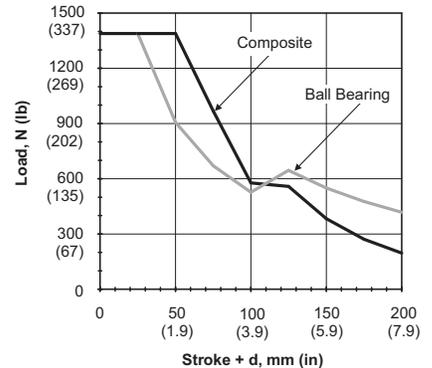


Load Stopping Capacity Standard Unit

P5T Series actuators are ideal for conveyor stopping applications. Units can be mounted horizontally or vertically.


Composite bushings are strongly recommended for this type of application.

EXAMPLE: A P5T-50 unit with a stroke up to 50mm will stop an object moving at 40 cm/second (15.75 in/s) that weighs up to 50 kg (110 lb).


Note: The following graphs are based on 50mm of stroke.

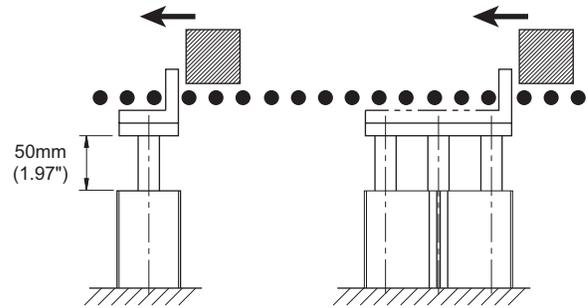


16mm Bore Size

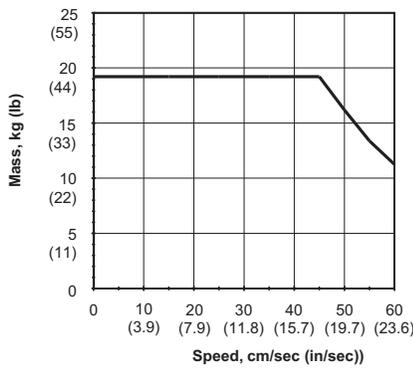


20mm Bore Size

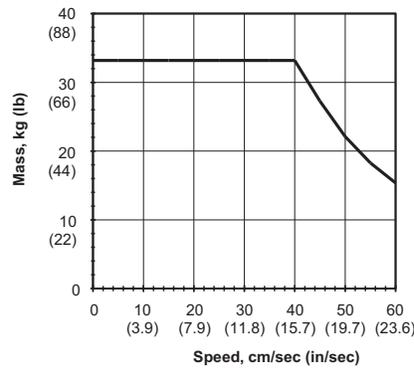


25mm Bore Size

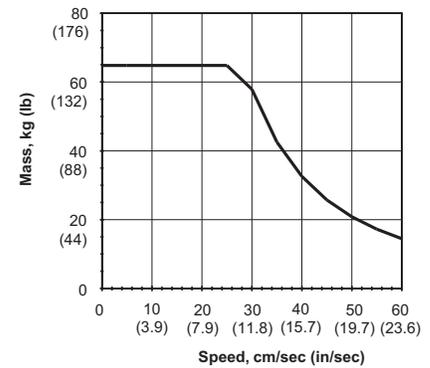


32mm Bore Size

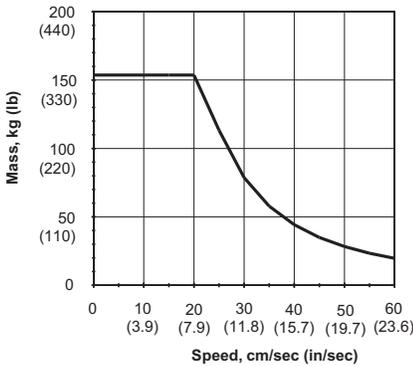


40mm Bore Size

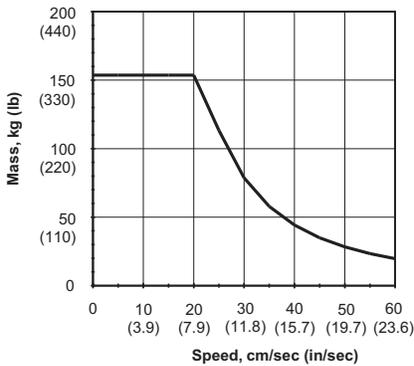


50mm Bore Size

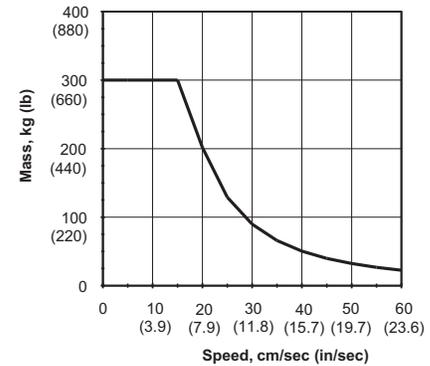


63mm Bore Size

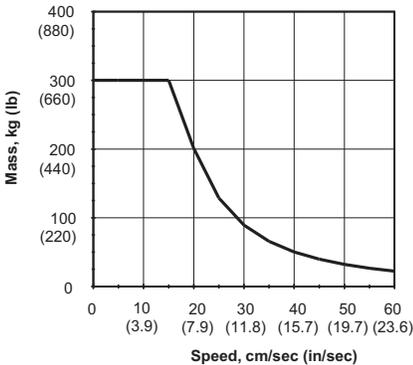

80mm Bore Size

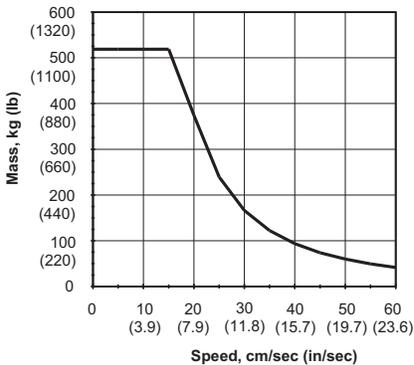

100mm Bore Size

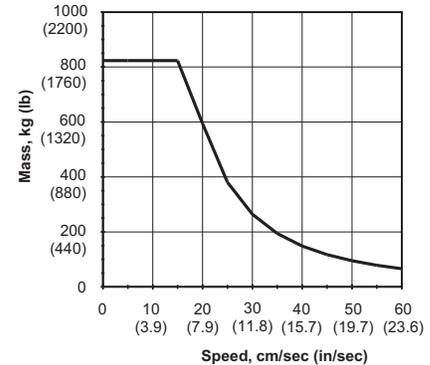


B	Guided Cylinders
	Actuator Products
P5T Series	
P5L Series	
HB Series	
P5E Series	










Asymmetrical Torque Capacity Standard Unit

Asymmetrical loading occurs when the load is applied to one side of the unit. P5T Series units can resist torsional loads that are asymmetrical.

EXAMPLE: A mechanism exerts an asymmetrical load of 15Nm on a P5T-50 with 50mm “stroke+d”. The P5T-50 with composite bushings will have adequate torsional capacity.

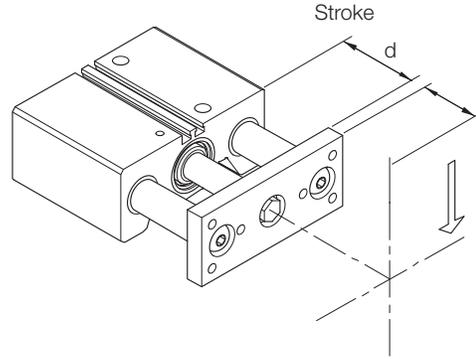


B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E

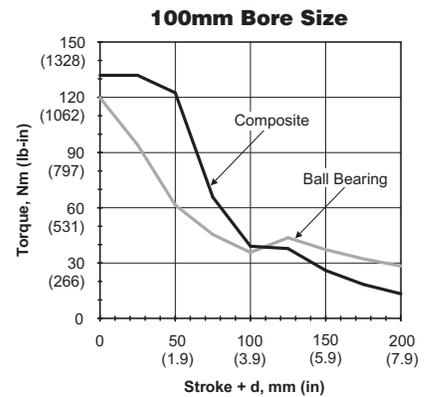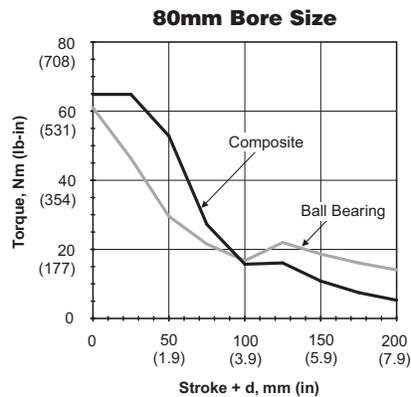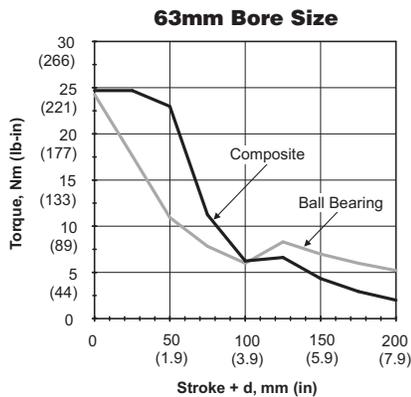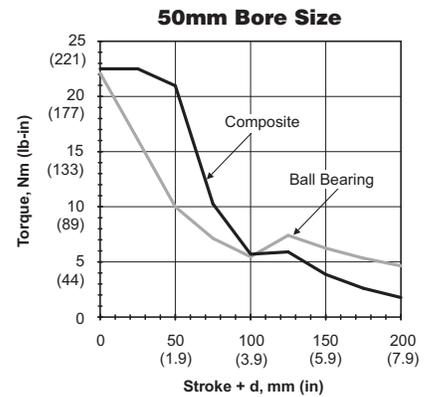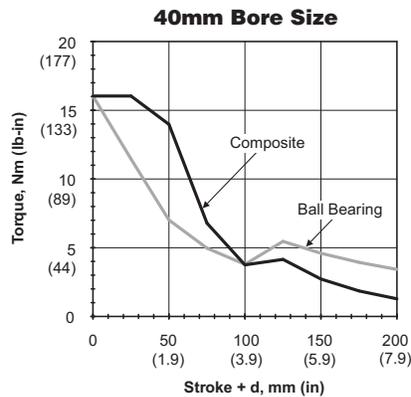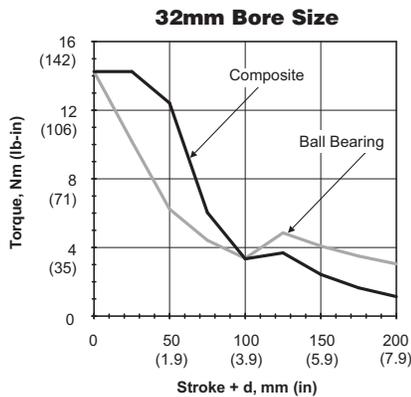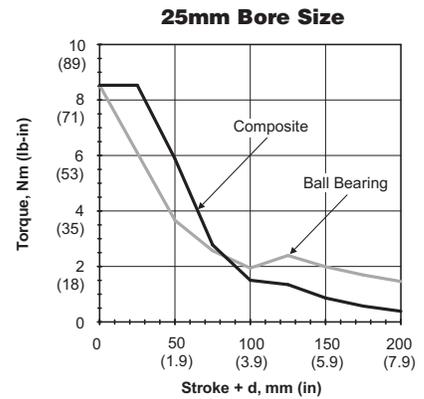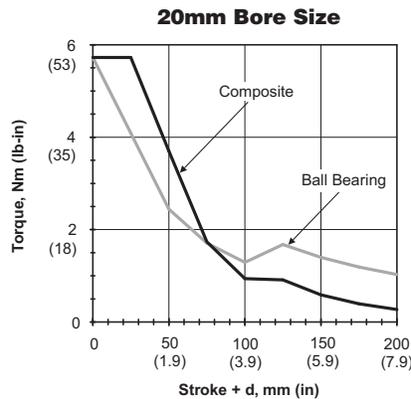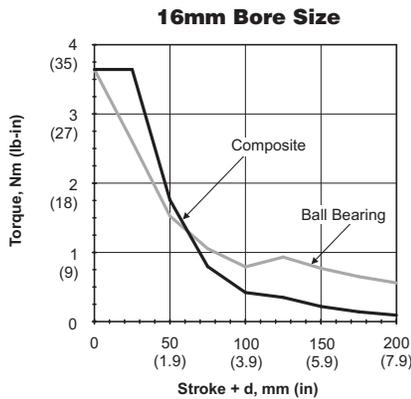










Vertical Eccentric Load Capacity Standard Unit

P5T Series units mounted vertically will have the same eccentric load capacity regardless of orientation. The graphs provide maximum load capacity for an eccentric mounted load. The load is assumed to be mounted at the face of the tooling plate.


These load curves illustrate load ratings based on the bearing system of the product. Load rating is a key selection criterion but is not the only one to consider in the selection of a product.

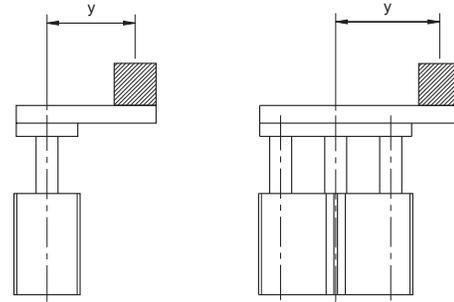

y = eccentricity distance

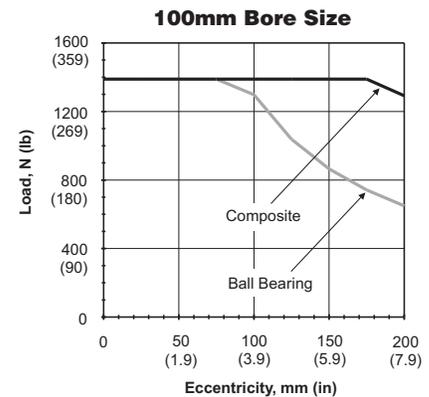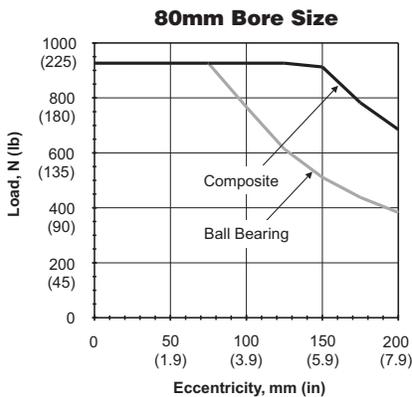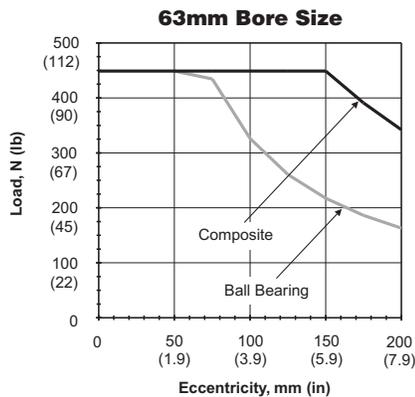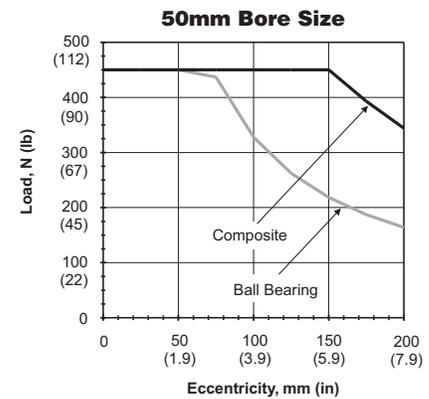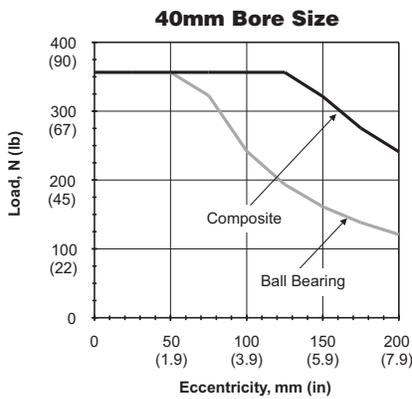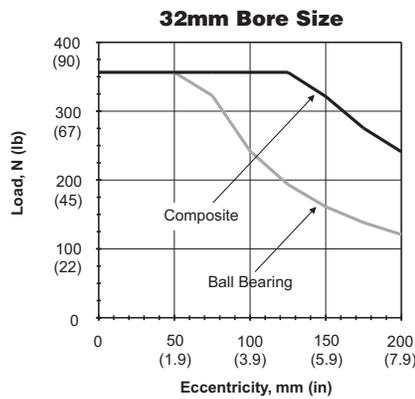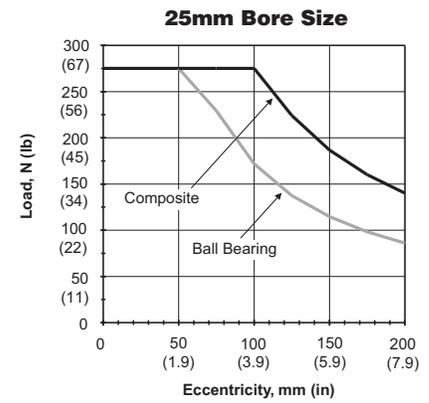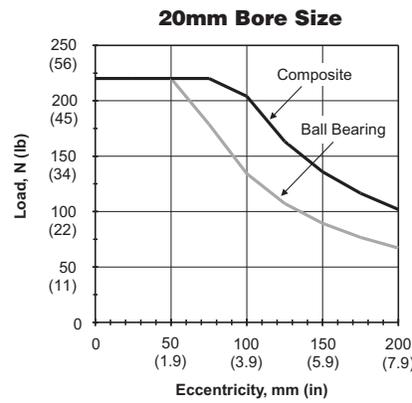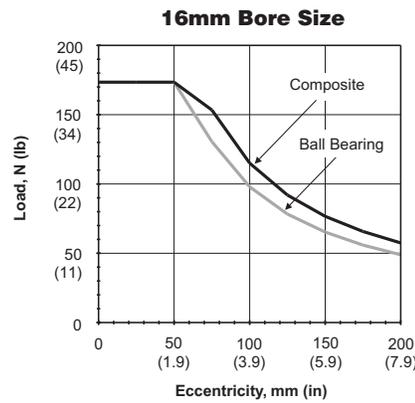

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

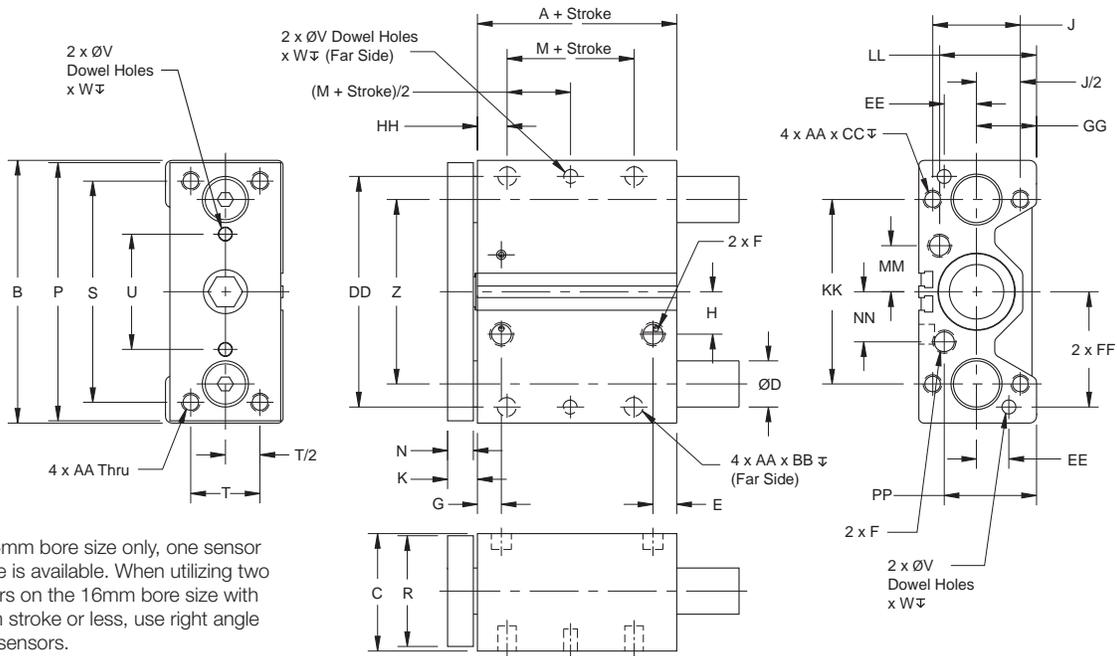

Note: On 16mm bore size only, one sensor groove is available. When utilizing two sensors on the 16mm bore size with 25mm stroke or less, use right angle short sensors.

Dimensions in mm (inch)

Note: Dimensions for special stroke length actuators will be the same as those of the next longest stroke actuator.

Model	A**	B	C	D	D ²	E**	F	G	H	J	K
16	37.75 (1.49)	64 (2.52)	31 (1.22)	8 (0.315)	10 (0.394)	10.1 (0.40)	M5/10-32	10.1 (0.40)	6.95 (0.27)	22 (0.866)	9.94 (0.39)
20	36 (1.42)	74 (2.91)	36 (1.42)	10 (0.394)	12 (0.472)	19 (0.75)	1/8 NPTF or BSPP	10 (0.39)	15.8 (0.62)	26 (1.024)	9.94 (0.39)
25	38 (1.50)	88 (3.46)	42 (1.65)	12 (0.472)	16 (0.630)	21 (0.83)	1/8 NPTF or BSPP	11.4 (0.45)	15.5 (0.61)	32 (1.260)	9.94 (0.39)
32	36 (1.42)	114 (4.49)	51 (2.00)	16 (0.630)	20 (0.787)	10.26 (0.40)	1/8 NPTF or BSPP	10.35 (0.41)	18.42 (0.73)	38 (1.496)	13.1 (0.52)
40	44 (1.73)	124 (4.88)	52 (2.05)	16 (0.630)	20 (0.787)	12.10 (0.48)	1/8 NPTF or BSPP	14.9 (0.59)	22.53 (0.89)	38 (1.496)	13.1 (0.52)
50	44.9 (1.77)	140 (5.51)	62 (2.44)	20 (0.787)	25 (0.984)	14.5 (0.57)	1/4 NPTF or BSPP	16.1 (0.63)	27 (1.06)	44 (1.732)	14.7 (0.58)
63	50.05 (1.97)	150 (5.91)	75 (2.95)	20 (0.787)	25 (0.984)	16.4 (0.65)	1/4 NPTF or BSPP	14.5 (0.57)	33 (1.30)	44 (1.732)	14.7 (0.58)
80	60.3 (2.37)	188 (7.40)	95 (3.74)	25 (0.984)	30 (1.181)	17.5 (0.610)	3/8 NPTF or BSPP	19 (0.75)	37 (1.46)	56 (2.205)	18 (0.71)
100**	67.5 (2.60)	224 (8.82)	115 (4.53)	30 (1.181)	35 (1.38)	21.9 (0.862)	3/8 NPTF or BSPP	23 (0.91)	40 (1.57)	62 (2.441)	18 (0.71)

Model	M	N	P	R	S	T	U	V	W	Z	AA	BB
16	7 (0.276)	7.94 (0.31)	62 (2.44)	25.4 (1.00)	52 (2.047)	16 (.630)	20 (0.787)	3 (0.118)	6 (0.236)	42 (1.654)	M5x0.8	7.5 (0.30)
20	10 (0.394)	7.94 (0.31)	72 (2.83)	31.8 (1.25)	60 (2.362)	18 (.709)	30 (1.181)	4 (0.157)	6 (0.236)	52 (2.047)	M5x0.8	7.5 (0.30)
25	10 (0.394)	7.94 (0.31)	86 (3.39)	38 (1.50)	70 (2.756)	26 (1.024)	34 (1.339)	4 (0.157)	6 (0.236)	62 (2.441)	M6x1.0	9 (0.35)
32	5 (0.197)	11.1 (0.44)	112 (4.41)	44.5 (1.75)	96 (3.780)	30 (1.181)	50 (1.969)	6 (0.236)	6 (0.236)	80 (3.150)	M8x1.25	11 (0.43)
40	10 (0.394)	11.1 (0.44)	122 (4.80)	44.5 (1.75)	106 (4.173)	30 (1.181)	60 (2.362)	6 (0.236)	6 (0.236)	90 (3.543)	M8x1.25	11 (0.43)
50	10 (0.394)	12.7 (0.50)	138 (5.43)	57.2 (2.25)	120 (4.724)	40 (1.575)	60 (2.362)	8 (0.315)	8 (0.315)	100 (3.937)	M10x1.5	12 (0.47)
63	10 (0.394)	12.7 (0.50)	148 (5.83)	69.9 (2.75)	130 (5.118)	50 (1.969)	72 (2.835)	8 (0.315)	8 (0.315)	110 (4.331)	M10x1.5	15 (0.59)
80	15 (0.591)	16 (0.63)	185 (7.28)	89 (3.50)	160 (6.299)	60 (2.362)	92 (3.622)	10 (0.394)	10 (0.394)	140 (5.512)	M12x1.75	18 (0.71)
100	15 (0.591)	16 (0.63)	221 (8.70)	108 (4.25)	190 (7.480)	80 (3.150)	114 (4.488)	10 (0.394)	10 (0.394)	170 (6.693)	M14x2.0	21 (0.83)

Model	CC	DD	EE	FF	GG	HH	KK	LL	MM	NN	PP	Piston Rod
16	10 (0.39)	54 (2.126)	8 (0.315)	27 (1.063)	15 (0.591)	13.06 (0.514)	42 (1.654)	22.5 (0.88)	11.25 (0.44)	9.7 (0.38)	23.0 (0.91)	8 (0.315)
20	10 (0.39)	64 (2.520)	10 (0.394)	32 (1.260)	17 (0.669)	13.06 (0.514)	52 (2.126)	26.0 (1.02)	15.4 (0.61)	15.4 (0.61)	26.0 (1.0)	10 (0.394)
25	12 (0.47)	76 (2.992)	11 (0.433)	38 (1.496)	21 (0.827)	14.06 (0.553)	62 (2.441)	33.4 (1.31)	17 (0.67)	17 (0.67)	33.4 (1.31)	10 (0.394)
32	16 (0.63)	100 (3.937)	14 (0.551)	50 (1.969)	26 (1.024)	12.9 (0.508)	80 (3.150)	42 (1.65)	20 (0.79)	21.7 (0.85)	38 (1.50)	16 (0.630)
40	16 (0.63)	110 (4.33)	14 (0.551)	55 (2.165)	26 (1.024)	13.9 (0.547)	90 (3.543)	41 (1.61)	24 (0.95)	26.4 (1.04)	37.9 (1.49)	16 (0.630)
50	20 (0.79)	124 (4.882)	16 (0.630)	62 (2.441)	30 (1.181)	14.3 (0.563)	100 (3.937)	51 (2.01)	29 (1.14)	33 (1.30)	44 (1.73)	20 (0.787)
63	20 (0.79)	132 (5.197)	18 (0.709)	66 (2.598)	36.5 (1.437)	16.3 (0.642)	110 (4.331)	62 (2.44)	36 (1.42)	37.75 (1.49)	57.75 (2.27)	20 (0.787)
80	24 (0.94)	166 (6.535)	22 (0.866)	83 (3.268)	46.5 (1.831)	21 (0.83)	140 (5.512)	78 (3.07)	45 (1.77)	48 (1.89)	75.5 (2.97)	25 (0.984)
100	28 (1.10)	200 (7.874)	24 (0.945)	100 (3.937)	56.5 (2.224)	25 (0.98)	170 (6.693)	91.5 (3.60)	53 (2.09)	51 (2.01)	95.5 (3.76)	25 (0.984)

D1 With linear ball bearing

D2 With composite bushing

** For Model 100 with 25mm stroke, A = 100.3 (3.95") and E = 28 (1.10")




Contaminant & Weld Flash Covers

A contaminant cover protects the guide rods and bearings from particles and fluid that could cause premature failure.

A weld flash cover protects guide rods and bearings from weld spatter.

Cover option can be ordered on models having the bearings both ends option.

Consult factory to order.

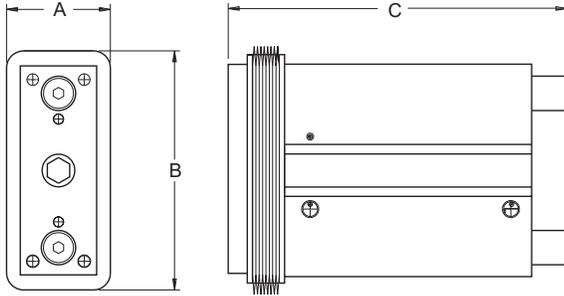

Weld Flash Cover Specifications

Coating material (exposed side)	PVC (Black)
Base material	Nomex
Coating material (other side)	PVC (Black)
Material thickness range	.012" - .016" (.3-.4mm)
Temperature resistance (nomex)	
Briefly	642°F (450°C)
Continuously	-22° to 572°F (-30° to 300°C)
Temperature resistance (coating)	
Briefly	392°F (200°C)
Continuously	-22° to 302°F (-30° to 150°C)
Resistant to	Chemicals, coolants, solvents, oil
Characteristics	self-extinguishing, abrasion resistant
Material weight	400 grams/square meter

Dimensions in mm (inch)

Model	A	B	Standard stroke									
			10	25	40	50	75	100	125	150	175	200
16	42 (1.65)	86 (3.39)	61.2 (2.41)	100.2 (3.94)	135.2 (5.32)	135.2 (5.32)	160.2 (6.31)	200.2 (7.88)	-	-	-	-
20	45 (1.77)	98 (3.86)	-	106.9 (4.21)	141.9 (5.59)	141.9 (5.59)	166.9 (6.57)	216.9 (8.54)	241.9 (9.52)	-	-	-
25	49 (1.93)	112 (4.41)	-	119.9 (4.72)	-	144.9 (5.70)	169.9 (6.69)	194.9 (7.67)	241.9 (9.52)	266.9 (10.51)	-	-
32	62 (2.44)	142 (5.59)	-	127.9 (5.04)	-	152.9 (6.02)	177.9 (7.00)	202.9 (7.99)	266 (10.47)	291 (11.46)	316 (12.44)	341 (13.43)
40	62 (2.44)	152 (5.98)	-	127.9 (5.04)	-	152.9 (6.02)	177.9 (7.00)	202.9 (7.99)	266 (10.47)	291 (11.46)	316 (12.44)	341 (13.43)
50	66 (2.60)	167 (6.57)	-	134 (5.28)	-	159 (6.26)	184 (7.24)	209 (8.23)	274.1 (10.79)	299.1 (11.78)	324.1 (12.76)	349.1 (13.74)
63	77 (3.03)	187 (7.36)	-	134 (5.28)	-	159 (6.26)	184 (7.24)	209 (8.23)	274.1 (10.79)	299.1 (11.78)	324.1 (12.76)	349.1 (13.74)
80	104 (4.09)	244 (9.61)	-	151.8 (5.98)	-	176.8 (6.96)	201.8 (7.94)	226.8 (8.93)	290 (11.42)	315 (12.40)	340 (13.39)	365 (14.37)
100	109 (4.29)	279 (10.98)	-	170.3 (6.70)	-	195.3 (7.69)	220.3 (8.67)	245.3 (9.66)	308.4 (12.14)	333.4 (13.13)	358.4 (14.11)	383.4 (15.09)


Seal Kits

Bore size	Seal kit part number	
	Nitrile seals	Fluorocarbon seals
16	PSK-P5T16	PSK-P5T16-F
20	PSK-P5T20	PSK-P5T20-F
25	PSK-P5T25	PSK-P5T25-F
32	PSK-P5T32	PSK-P5T32-F
40	PSK-P5T40	PSK-P5T40-F
50	PSK-P5T50	PSK-P5T50-F
63	PSK-P5T63	PSK-P5T63-F
80	PSK-P5T80	PSK-P5T80-F
100	PSK-P5T100	PSK-P5T100-F

P5T Rodlock Dimensions

Bore	RA	RB	RC	RD	RE	K
32	58 (2.28)	112 (4.41)	6 (0.24)	10 (0.39)	49.50 (1.95)	2 (0.08)
40	58 (2.28)	122 (4.80)	6 (0.24)	10 (0.39)	49.50 (1.95)	2 (0.08)
50	66 (2.60)	138 (5.43)	10 (0.39)	13 (0.51)	59.30 (2.33)	2 (0.08)
63	83 (3.27)	148 (5.83)	7 (0.28)	18 (0.71)	69.90 (2.75)	2 (0.08)
80	100 (3.94)	185 (7.28)	10 (0.39)	26 (1.02)	90.70 (3.57)	2 (0.08)
100	116 (4.57)	221 (8.70)	10 (0.39)	43 (1.69)	108.00 (4.25)	2 (0.08)

Dimensions in mm (inch)

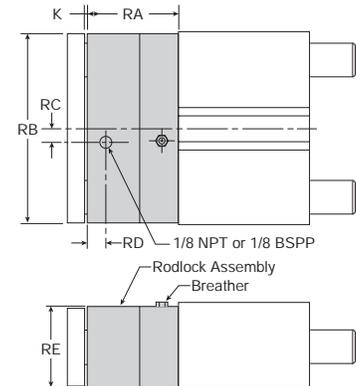

P5L Series

- 3 body styles (Thrust, Reach, Base)
- 8 bore sizes 20mm to 100mm
- Maximum strokes 400 to 1000mm depending on model
- 3 Bearing options: composite, ball bearing, self-aligning ball bearing
- Dowel holes standard on body and tool plate
- Available with adjustable stroke and shock absorbers
- Direct mount of thrust and reach to same size base
- Powered by P1L cylinder



Operating information

Operating pressure:	10 bar (145 PSIG)
Temperature range:	
Standard seals	-17°C to 74°C (0°F to 165°F)
Fluorocarbon seals*	-17°C to 121°C (0°F to 250°F) *
	See fluorocarbon seal option for high temperature applications.
Operating characteristics:	Double acting
Filtration requirements:	40 micron, dry filtered air


Ordering information

P5L - R L 100 J1 A A N F N - 0900 - A

Series	T Thrust slide R Reach slide B Base slide
Bore size	020 20mm 025 25mm 032 32mm 040 40mm 050 50mm 063 63mm 080 80mm 100 100mm
Cylinder type	L P1L cylinder
Cylinder seals	N Nitrile (standard) V Fluorocarbon (high temperature)
Stroke length	Order in 1mm increments.
T-slots	- Standard (Extruded T-slots on sizes 20-40, no T-slots on sizes 50-100) A** Machined T-slots (Sizes 50-100)
** Not available on sizes 20-40	
Proximity sensor options	N No Sensor P PNP, lead type R NPN, lead type S PNP, plug in type T NPN, plug in type W Prox ready, 8mm (no sensor supplied) Z Prox ready, 12mm (no sensor supplied)
Note: Piston magnet is standard on all cylinders. Inductive proximity sensors are included with Options P, R, S & T.	
Cylinder port style	G BSPT ports H NPTF ports P BSPT ports w/ Presto-lok flow controls (mm) F NPTF ports w/ Presto-lok flow controls (inch) B BSPT ports w/ flow controls N NPTF ports w/ flow controls
Extend options	N None A Shock/stroke adjusters B Bumpers (base slides only) C Cushions both ends E Micro-adjusters and cushions (both ends only) H Cushions and bumpers (includes options C & K) K Bumpers and adjustable stop collars L Shock absorbers and bumpers (N/A on base slides)
Retract options	N None A Shock/stroke adjusters B Bumpers only C Cushions both ends E Micro-adjusters and cushions (both ends only) H Cushions and bumpers (includes options C & K) K Bumpers and adjustable stop collars L Shock absorbers and bumpers (N/A on base slides)
Bushings	J1 Composite bushing, chrome plated shafts J2 Composite bushing, oversized chrome plated shafts J3 Composite bushing, stainless steel shafts J4 Composite bushing, oversized stainless steel shafts G1 Composite bushing, chrome plated shafts, contaminant tolerant seals G3 Composite bushing, stainless steel shafts, contaminant tolerant seals H3 Linear ball bearings, stainless steel shafts H5 Linear ball bearings, carbon steel shafts S3* Self aligning linear ball bearings, stainless steel shafts S5* Self aligning linear ball bearings, carbon steel shafts
* Not available 20mm bore models	
Sensors	For sensors see page B339.

B
 Guided Cylinders
 Actuator Products
 P5T Series
 P5L Series
 HB Series
 P5E Series

Thrust Slides

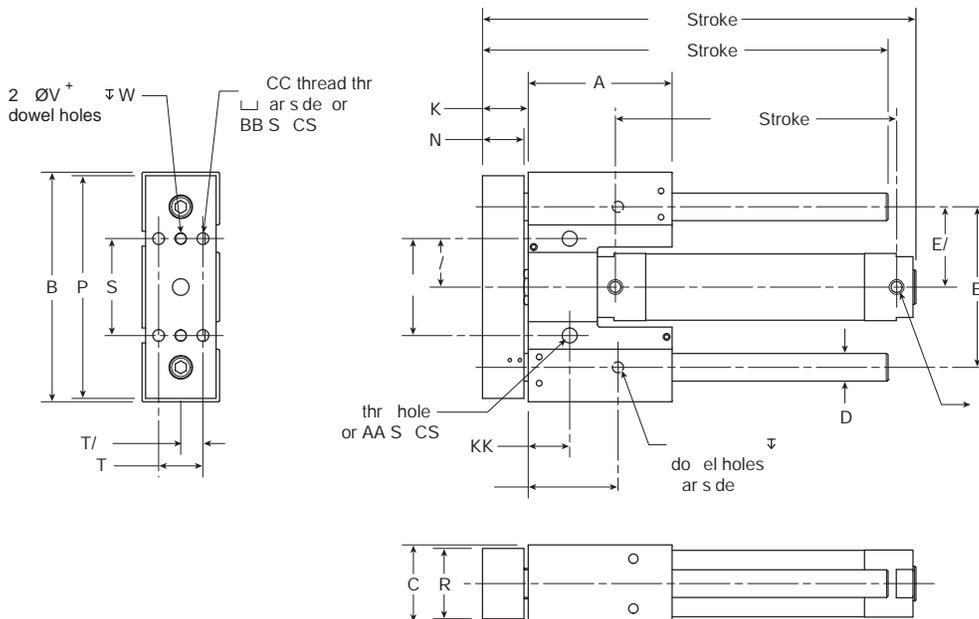

Dimensions in mm (inch)

Bore size	A	B	C	Ds*	Do*	E	F**	K	L	M	N	P	R
20	60 (2.4)	98 (3.9)	30 (1.2)	10 (0.4)	12 (0.5)	68 (2.7)	1/8†	20 (0.8)	86 (3.4)	114 (4.5)	17 (0.7)	96 (3.8)	26 (1.0)
25	76 (3.0)	122 (4.8)	38 (1.5)	12 (0.5)	16 (0.6)	84 (3.3)	1/8†	25 (1.0)	107 (4.2)	126 (5.0)	22 (0.9)	119 (4.7)	33 (1.3)
32	84 (3.3)	140 (5.5)	44 (1.7)	16 (0.6)	20 (0.8)	92 (3.6)	1/8	27 (1.1)	117 (4.6)	140 (5.5)	24 (0.9)	137 (5.4)	39 (1.5)
40	104 (4.1)	166 (6.5)	56 (2.2)	20 (0.8)	25 (1.0)	116 (4.6)	1/8	33 (1.3)	143 (5.6)	163 (6.4)	30 (1.2)	161 (6.3)	51 (2.0)
50	130 (5.1)	216 (8.5)	70 (2.8)	25 (1.0)	30 (1.2)	148 (5.8)	1/4	39 (1.5)	175 (6.9)	195 (7.7)	36 (1.4)	211 (8.3)	63 (2.5)
63	152 (6.0)	260 (10.2)	84 (3.3)	30 (1.2)	40 (1.6)	176 (6.9)	1/4	43 (1.7)	203 (8.0)	219 (8.6)	40 (1.6)	255 (10.0)	77 (3.0)
80	180 (7.1)	320 (12.6)	102 (4.0)	40 (1.6)	50 (2.0)	220 (8.7)	3/8	49 (1.9)	237 (9.3)	249 (9.8)	46 (1.8)	315 (12.4)	95 (3.7)
100	222 (8.7)	390 (15.4)	120 (4.7)	50 (2.0)	60 (2.4)	260 (10.2)	1/2	59 (2.3)	289 (11.4)	306 (12.0)	56 (2.2)	383 (15.1)	111 (4.4)

Bore size	S	T	U	V	W	Y	AA	BB	CC	FF	KK	LL
20	40 (1.6)	16 (0.6)	40 (1.6)	4.03 (0.2)	4 (0.2)	36 (1.4)	M5	M4	M5x0.8	45 (1.8)	16 (0.6)	4 (0.2)
25	48 (1.9)	20 (0.8)	48 (1.9)	5.03 (0.2)	5 (0.2)	46 (1.8)	M6	M5	M6x1.0	46 (1.8)	22 (0.9)	5 (0.2)
32	50 (2.0)	24 (0.9)	50 (2.0)	6.03 (0.2)	6 (0.2)	53 (2.1)	M8	M6	M8x1.25	43 (1.7)	28 (1.1)	6 (0.2)
40	70 (2.8)	32 (1.3)	70 (2.8)	8.03 (0.3)	8 (0.3)	65 (2.6)	M10	M8	M10x1.5	49 (1.9)	30 (1.2)	8 (0.3)
50	80 (3.1)	42 (1.7)	80 (3.1)	8.03 (0.3)	8 (0.3)	83 (3.3)	M10	M8	M10x1.5	53 (2.1)	43 (1.7)	8 (0.3)
63	100 (3.9)	52 (2.0)	100 (3.9)	10.03 (0.4)	10 (0.4)	101 (4.0)	M12	M10	M12x1.75	52 (2.0)	51 (2.0)	10 (0.4)
80	124 (4.9)	62 (2.4)	124 (4.9)	12.03 (0.5)	12 (0.5)	127 (5.0)	M16	M14	M16x1.5	64 (2.5)	65 (2.6)	12 (0.5)
100	148 (5.8)	72 (2.8)	148 (5.8)	12.03 (0.5)	12 (0.5)	154 (6.1)	M20	M16	M20x2.5	66 (2.6)	80 (3.1)	12 (0.5)

* s = standard, o = oversized ** NPTF or BSPT † w/cushions M5/10-32



B
 Guided Cylinders
 Actuator Products


P5T Series

P5L Series

HB Series

P5E Series

Reach Slides

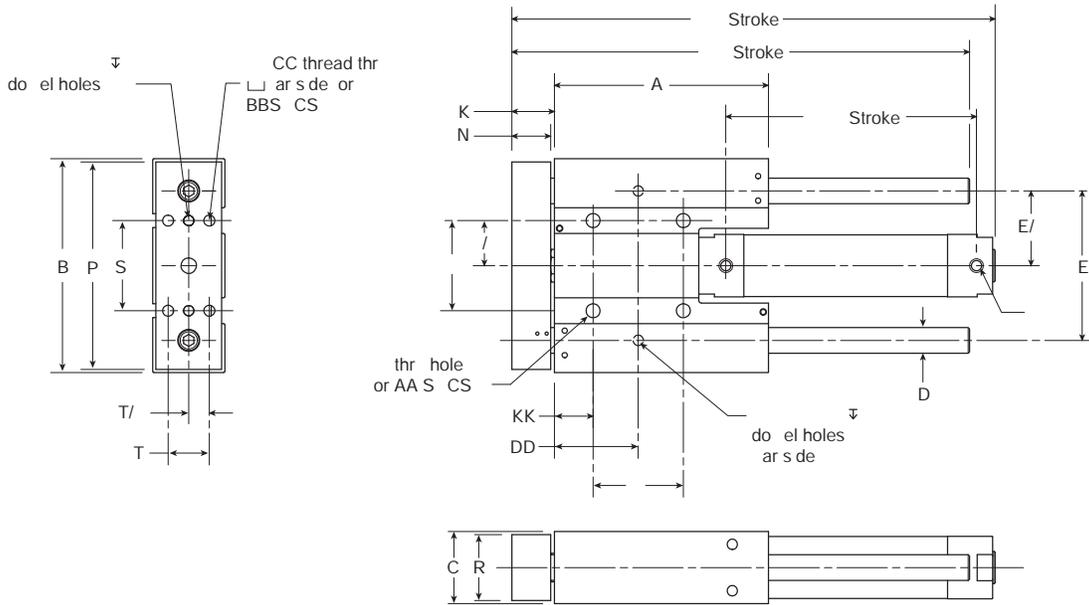

Dimensions in mm (inch)


Bore size	A	B	C	Ds*	Do*	E	F**	K	L	M	N	P	R
20	98 (3.9)	98 (3.9)	30 (1.2)	10 (0.4)	12 (0.5)	68 (2.7)	1/8†	20 (0.8)	124 (4.9)	152 (6.0)	17 (0.7)	96 (3.8)	26 (1.0)
25	122 (4.8)	122 (4.8)	38 (1.5)	12 (0.5)	16 (0.6)	84 (3.3)	1/8†	25 (1.0)	153 (6.0)	172 (6.8)	22 (0.9)	119 (4.7)	33 (1.3)
32	140 (5.5)	140 (5.5)	44 (1.7)	16 (0.6)	20 (0.8)	92 (3.6)	1/8	27 (1.1)	173 (6.8)	196 (7.7)	24 (0.9)	137 (5.4)	39 (1.5)
40	166 (6.5)	166 (6.5)	56 (2.2)	20 (0.8)	25 (1.0)	116 (4.6)	1/8	33 (1.3)	205 (8.1)	225 (8.9)	30 (1.2)	161 (6.3)	51 (2.0)
50	216 (8.5)	216 (8.5)	70 (2.8)	25 (1.0)	30 (1.2)	148 (5.8)	1/4	39 (1.5)	261 (10.3)	281 (11.1)	36 (1.4)	211 (8.3)	63 (2.5)
63	260 (10.2)	260 (10.2)	84 (3.3)	30 (1.2)	40 (1.6)	176 (6.9)	1/4	43 (1.7)	311 (12.2)	327 (12.9)	40 (1.6)	255 (10.0)	77 (3.0)
80	320 (12.6)	320 (12.6)	102 (4.0)	40 (1.6)	50 (2.0)	220 (8.7)	3/8	49 (1.9)	377 (14.8)	389 (15.3)	46 (1.8)	315 (12.4)	9 (3.7)
100	390 (15.4)	390 (15.4)	120 (4.7)	50 (2.0)	60 (2.4)	260 (10.2)	1/2	59 (2.3)	457 (18.0)	474 (18.7)	56 (2.2)	383 (15.1)	111 (4.4)

Bore size	S	T	U	V	W	Y	AA	BB	CC	DD	FF	KK	LL
20	40 (1.6)	16 (0.6)	40 (1.6)	4.03 (0.2)	4 (0.2)	40 (1.6)	M5	M4	M5X0.8	36 (1.4)	45 (1.8)	16 (0.6)	4 (0.2)
25	48 (1.9)	20 (0.8)	48 (1.9)	5.03 (0.2)	5 (0.2)	48 (1.9)	M6	M5	M6X1.0	46 (1.8)	46 (1.8)	22 (0.9)	5 (0.2)
32	50 (2.0)	24 (0.9)	50 (2.0)	6.03 (0.2)	6 (0.2)	50 (2.0)	M8	M6	M8X1.25	53 (2.1)	43 (1.7)	28 (1.1)	6 (0.2)
40	70 (2.8)	32 (1.3)	70 (2.8)	8.03 (0.3)	8 (0.3)	70 (2.8)	M10	M8	M10X1.5	65 (2.6)	49 (1.9)	30 (1.2)	8 (0.3)
50	80 (3.1)	42 (1.7)	80 (3.1)	8.03 (0.3)	8 (0.3)	80 (3.1)	M10	M8	M10X1.5	83 (3.3)	53 (2.1)	43 (1.7)	8 (0.3)
63	100 (3.9)	52 (2.0)	100 (3.9)	10.03 (0.4)	10 (0.4)	100 (3.9)	M12	M10	M12X1.75	101 (4.0)	52 (2.0)	51 (2.0)	10 (0.4)
80	124 (4.9)	62 (2.4)	124 (4.9)	12.03 (0.5)	12 (0.5)	124 (4.9)	M16	M14	M16X1.5	127 (5.0)	64 (2.5)	65 (2.6)	12 (0.5)
100	148 (5.8)	72 (2.8)	148 (5.8)	12.03 (0.5)	12 (0.5)	148 (5.8)	M20	M16	M20X2.5	154 (6.1)	66 (2.6)	80 (3.1)	12 (0.5)

* s = standard, o = oversized ** NPTF or BSPT † w/cushions M5/10-32



Base Slides

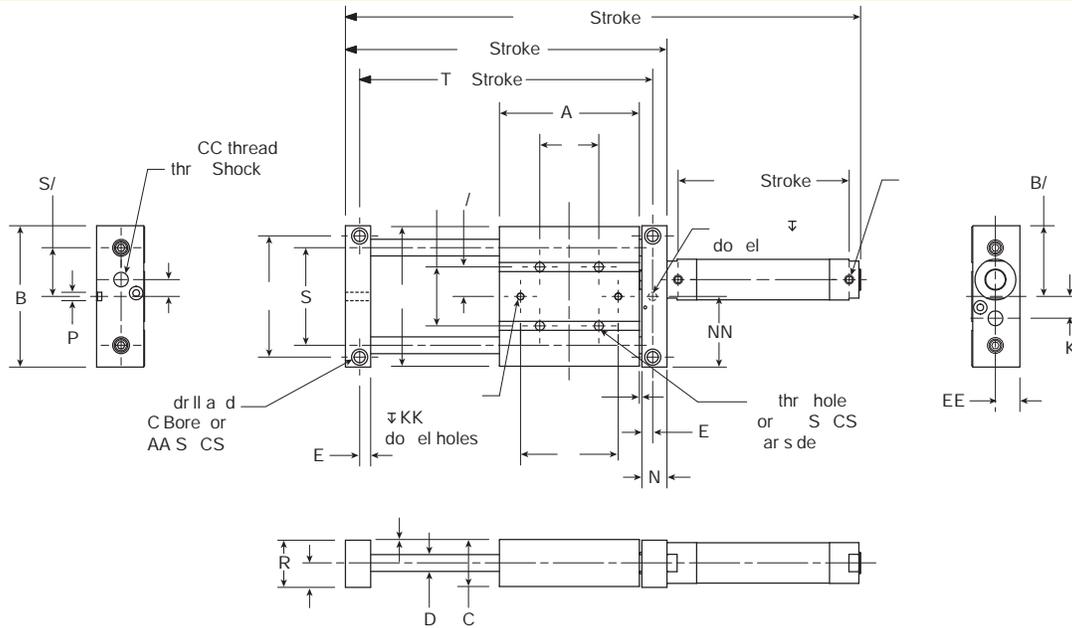

Dimensions in mm (inch)

Bore size	A	B	C	Ds*	Do*	E	F**	G	H	J	K	L	M	N	P+.03	R	S
20	98 (3.9)	100 (3.9)	30 (1.2)	10 (0.4)	12 (0.5)	8 (0.3)	1/8†	98 (3.9)	40 (1.6)	40 (1.6)	18 (0.7)	140 (5.5)	211 (8.3)	18 (0.7)	5.03 (0.2)	30 (1.2)	68 (2.7)
25	122 (4.8)	124 (4.9)	38 (1.5)	12 (0.5)	16 (0.6)	14 (0.6)	1/8†	122 (4.8)	48 (1.9)	48 (1.9)	22 (0.9)	176 (6.9)	247 (9.7)	24 (0.9)	6.03 (0.2)	38 (1.5)	84 (3.3)
32	140 (5.5)	142 (5.6)	44 (1.7)	16 (0.6)	20 (0.8)	12 (0.5)	1/8	140 (5.5)	50 (2.0)	50 (2.0)	22 (0.9)	198 (7.8)	271 (10.7)	26 (1.0)	6.03 (0.2)	44 (1.7)	92 (3.6)
40	166 (6.5)	168 (6.6)	56 (2.2)	20 (0.8)	25 (1.0)	13 (0.5)	1/8	166 (6.5)	70 (2.8)	70 (2.8)	26 (1.0)	232 (9.1)	312 (12.3)	30 (1.2)	10.03 (0.4)	56 (2.2)	116 (4.6)
50	216 (8.5)	218 (8.6)	70 (2.8)	25 (1.0)	30 (1.2)	16 (0.6)	1/4	216 (8.5)	80 (3.1)	80 (3.1)	28 (1.1)	292 (11.5)	384 (15.1)	35 (1.4)	10.03 (0.4)	70 (2.8)	148 (5.8)
63	260 (10.2)	262 (10.3)	84 (3.3)	30 (1.2)	40 (1.6)	19 (0.7)	1/4	260 (10.2)	100 (3.9)	100 (3.9)	42 (1.7)	350 (13.8)	442 (17.4)	42 (1.7)	12.03 (0.5)	84 (3.3)	176 (6.9)
80	320 (12.6)	322 (12.7)	102 (4.0)	40 (1.6)	50 (2.0)	24 (0.9)	3/8	320 (12.6)	124 (4.9)	124 (4.9)	42 (1.7)	434 (17.1)	545 (21.5)	54 (2.1)	16.03 (0.6)	102 (4.0)	220 (8.7)
100	390 (15.4)	392 (15.4)	120 (4.7)	50 (2.0)	60 (2.4)	28 (1.1)	1/2	390 (15.4)	148 (5.8)	148 (5.8)	62 (2.4)	528 (20.8)	639 (25.2)	66 (2.6)	16.03 (0.6)	120 (4.7)	260 (10.2)

Bore size	T	U	V***	W	X	Y	Z	AA	CC	EE	FF	HH	JJ	KK	LL	MM	NN
20	120 (4.7)	11 (0.4)	3 (0.1)	1 (0.0)	68 (2.7)	14 (0.6)	86 (3.4)	M6	M12	16 (0.6)	45 (1.8)	M5	4.03 (0.2)	4 (0.2)	5.03 (0.2)	5 (0.2)	50 (2.0)
25	156 (6.1)	12 (0.5)	3 (0.1)	1 (0.0)	84 (3.3)	18 (0.7)	104 (4.1)	M8	M14	20 (0.8)	46 (1.8)	M6	5.03 (0.2)	5 (0.2)	6.03 (0.2)	6 (0.2)	62 (2.4)
32	170 (6.7)	11 (0.4)	3 (0.1)	1 (0.0)	92 (3.6)	21 (0.8)	120 (4.7)	M10	M14	23 (0.9)	43 (1.7)	M8	6.03 (0.2)	6 (0.2)	6.03 (0.2)	6 (0.2)	71 (2.8)
40	198 (7.8)	20 (0.8)	3 (0.1)	1 (0.0)	116 (4.6)	27 (1.1)	144 (5.7)	M12	M20	29 (1.1)	49 (1.9)	M10	8.03 (0.3)	8 (0.3)	10.03 (0.4)	10 (0.4)	84 (3.3)
50	254 (10.0)	22 (0.9)	3 (0.1)	1 (0.0)	148 (5.8)	34 (1.3)	188 (7.4)	M16	M25	36 (1.4)	53 (2.1)	M10	8.03 (0.3)	8 (0.3)	10.03 (0.4)	10 (0.4)	109 (4.3)
63	304 (12.0)	30 (1.2)	3 (0.1)	1 (0.0)	176 (6.9)	41 (1.6)	224 (8.8)	M20	M25	43 (1.7)	52 (2.0)	M12	10.03 (0.4)	10 (0.4)	12.03 (0.5)	12 (0.5)	131 (5.2)
80	374 (14.7)	36 (1.4)	3 (0.1)	1 (0.0)	220 (8.7)	50 (2.0)	276 (10.9)	M24	M33	52 (2.0)	64 (2.5)	M16	12.03 (0.5)	12 (0.5)	16.03 (0.6)	16 (0.6)	161 (6.3)
100	452 (17.8)	36 (1.4)	3 (0.1)	1 (0.0)	260 (10.2)	59 (2.3)	336 (13.2)	M30	M36	61 (2.4)	66 (2.6)	M20	12.03 (0.5)	12 (0.5)	16.03 (0.6)	16 (0.6)	196 (7.7)

* s = standard, o = oversized ** NPTF or BSPT † w/cushions M5/10-32
 *** Space between housing and end plate in both extend and retract positions.



B
 Guided Cylinders
 Actuator Products
 P5T Series
 P5L Series
 HB Series
 P5E Series

Horizontal Load Capacity & Deflection with Standard Shafting

- Standard Composite w/ Chrome Plated or Stainless Steel Rods
- Recirculating Ball Bearings w/ Carbon or Stainless Steel Rods
- Self Aligning Ball Bearings w/ Carbon or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested side load at a given actuator stroke and distance (d) from the face of the tooling plate. The graphs include the weight of the support rods and tooling plate and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

See the P5L options section of this catalog for more bearing selection information.





Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.

Note: The following variables commonly affect the bearing life of a guided cylinder:


- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

B
 Guided Cylinders
 Actuator Products
 Series P5T
 Series P5L
 Series HB
 Series P5E





P5L Thrust Slides

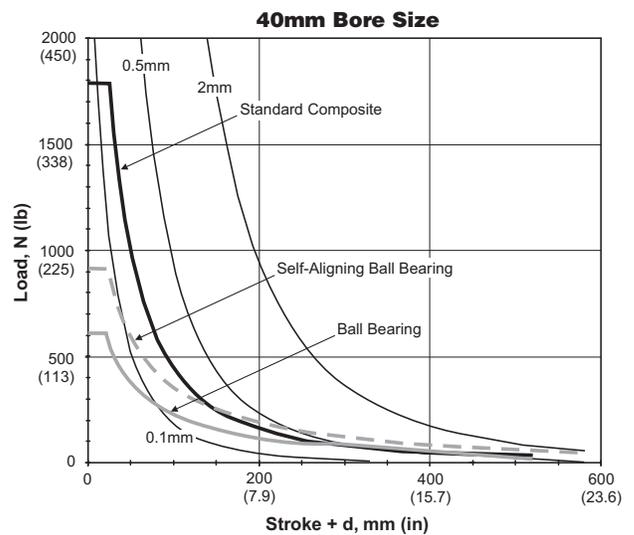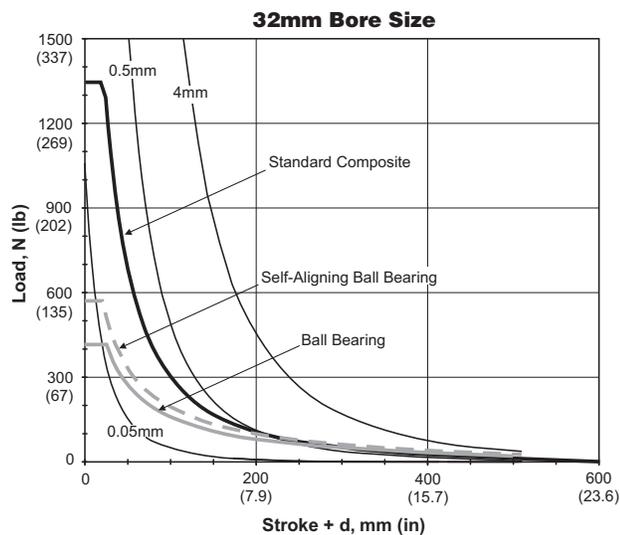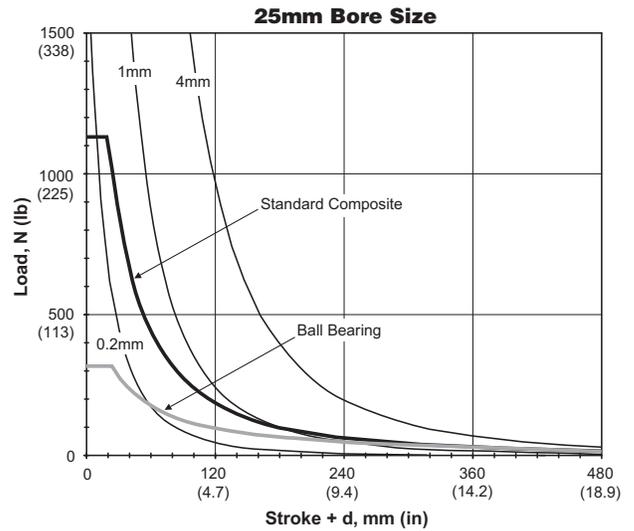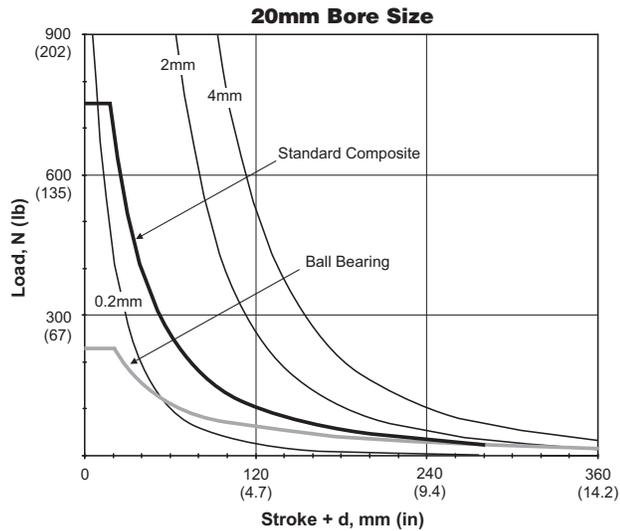

Horizontal Load Capacity & Deflection with Standard Shafting

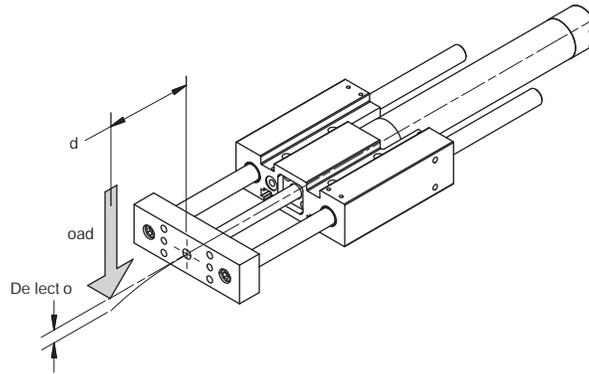

P5L Thrust Slides

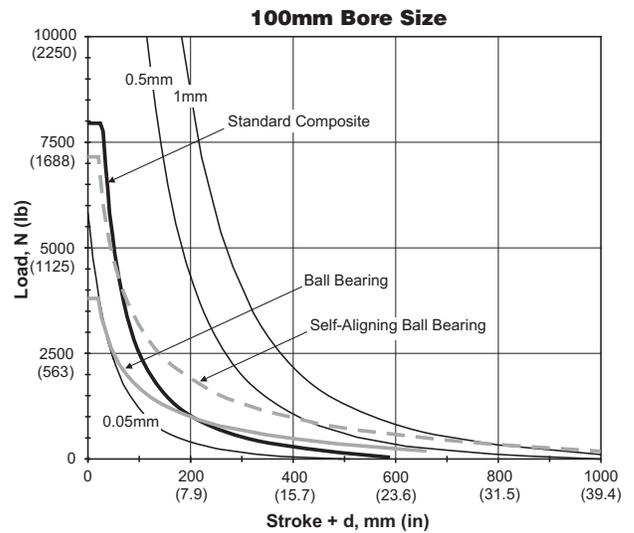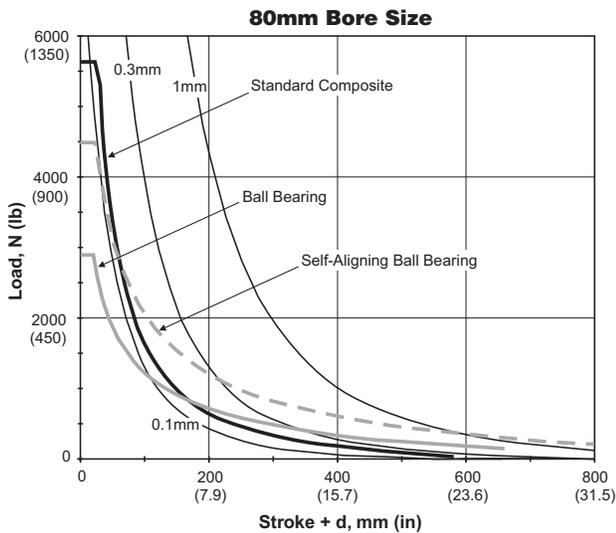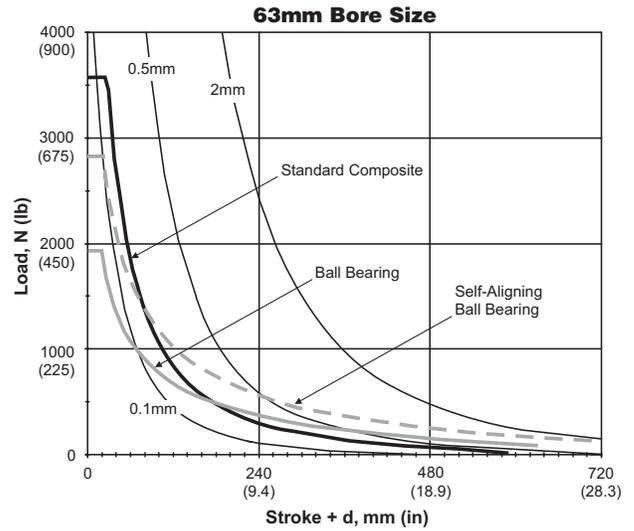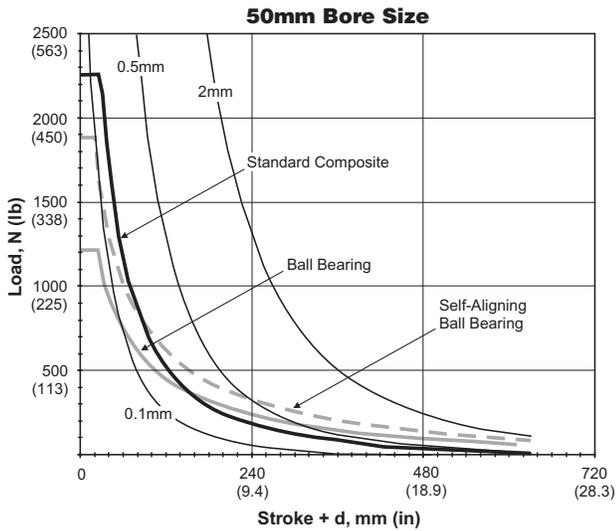

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

Horizontal Load Capacity & Deflection with Oversized Shafting

- Oversized Composite w/ Chrome Plated or Stainless Steel Rods

The graphs on the following two s illustrate the maximum suggested side load at a given actuator stroke and distance (d) from the face of the tooling plate. The graphs include the weight of the support rods and tooling plate and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

See the P5L options section of this catalog for more bearing selection information.





Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.

Note: The following variables commonly affect the bearing life of a guided cylinder:


- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

B
 Guided Cylinders
 Actuator Products
 Series P5T
 Series P5L
 Series HB
 Series P5E





P5L Thrust Slides

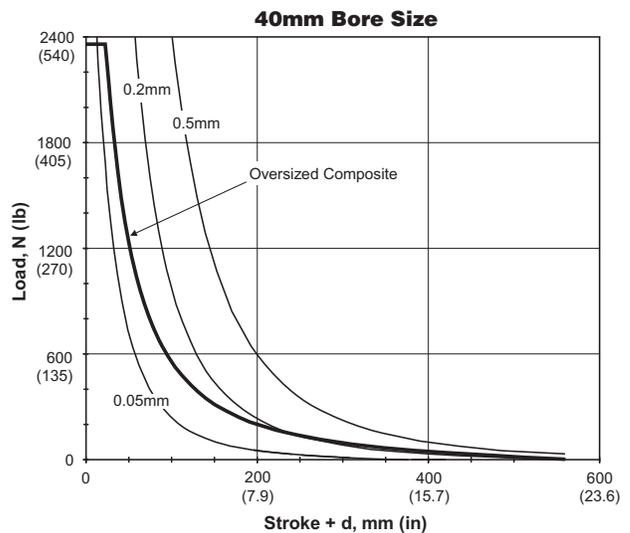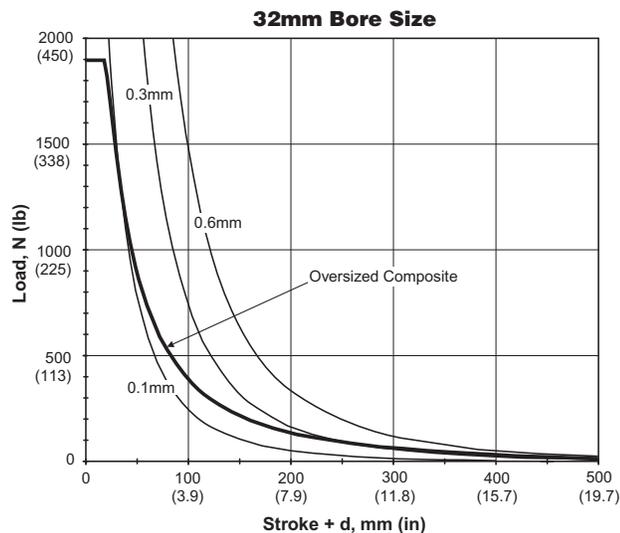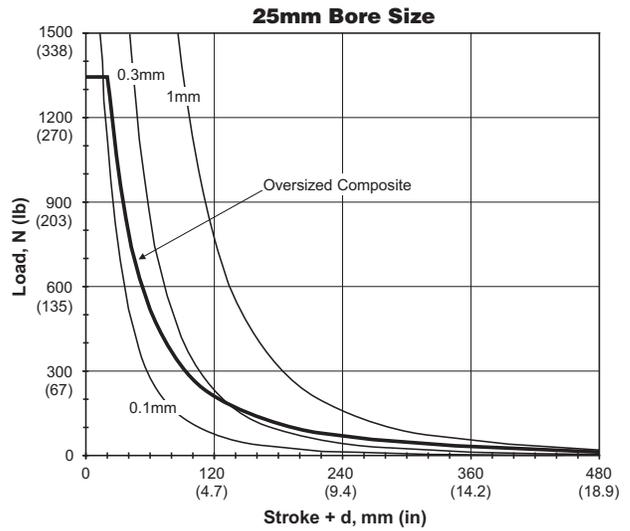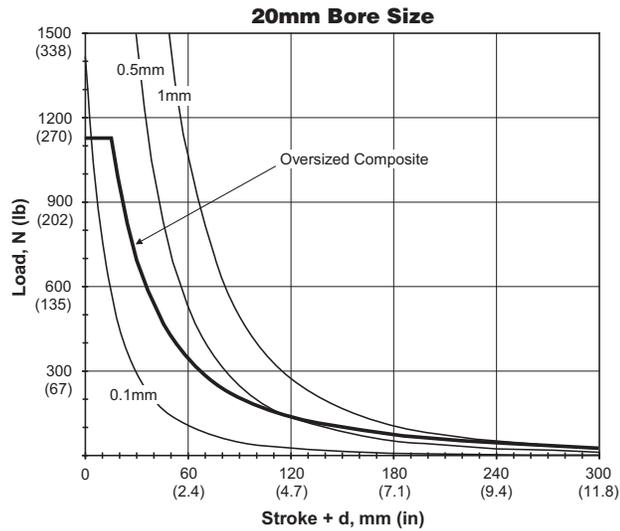

Horizontal Load Capacity & Deflection with Oversized Shafting

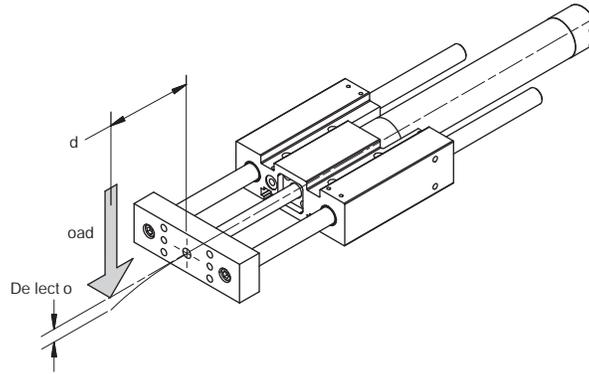

P5L Thrust Slides

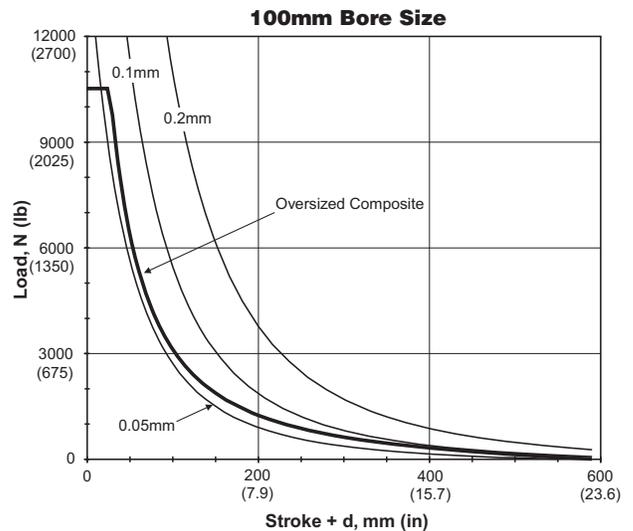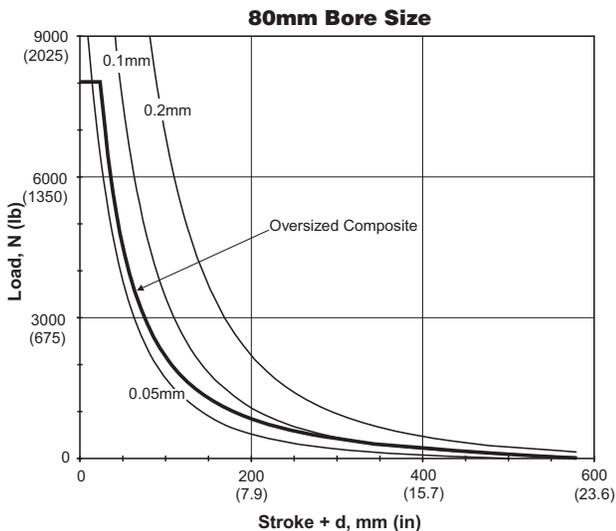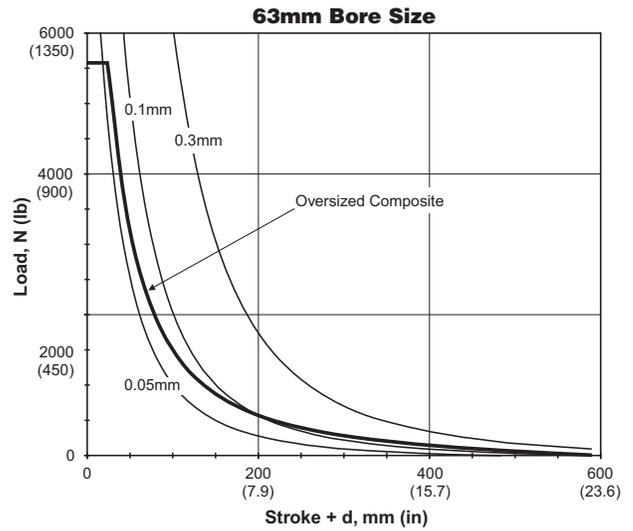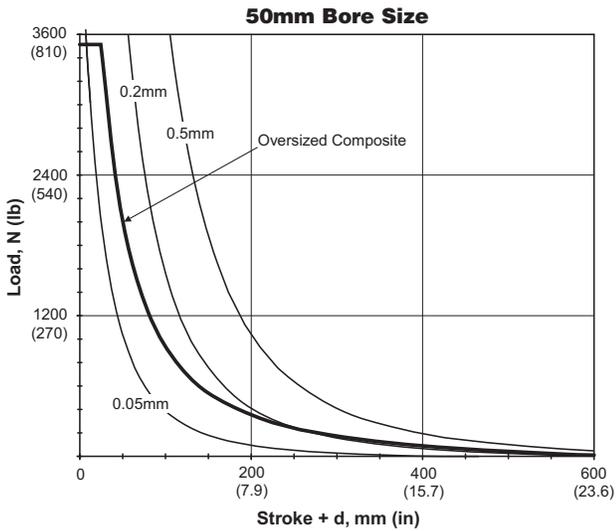

B	Guided Cylinders Actuator Products
	P5T Series
	P5L Series
	HB Series
P5E Series	

Horizontal Load Capacity & Deflection with Standard Shafting

- Recirculating Ball Bearings w/ Carbon or Stainless Steel Rods
- Self Aligning Ball Bearings w/ Carbon or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested side load at a given actuator stroke and distance (d) from the face of the tooling plate. The graphs include the weight of the support rods and tooling plate and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

See the P5L options section of this catalog for more bearing selection information.

Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.





Note: The following variables commonly affect the bearing life of a guided cylinder:

- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)


B
 Guided Cylinders
 Actuator Products

Series P5T
 Series P5L
 Series HB
 Series P5E





P5L Reach Slides

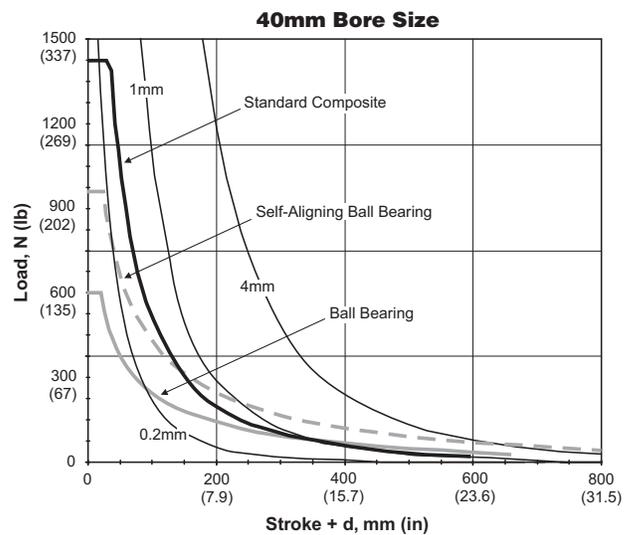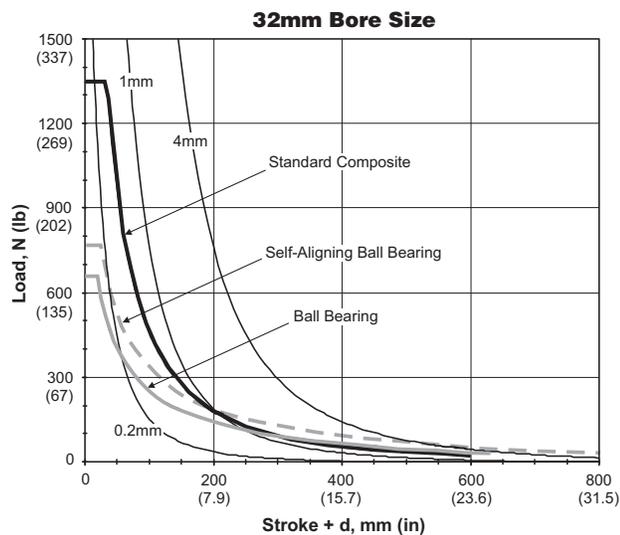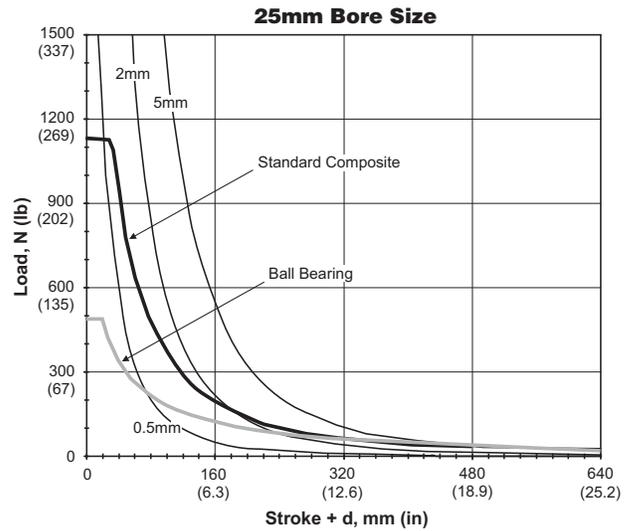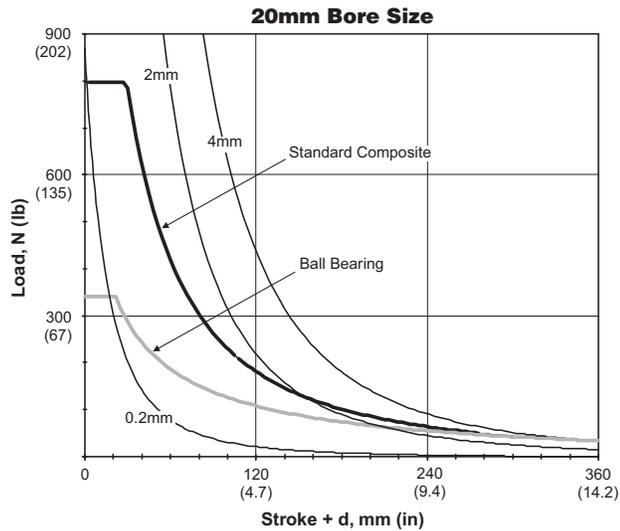

Horizontal Load Capacity & Deflection with Standard Shafting

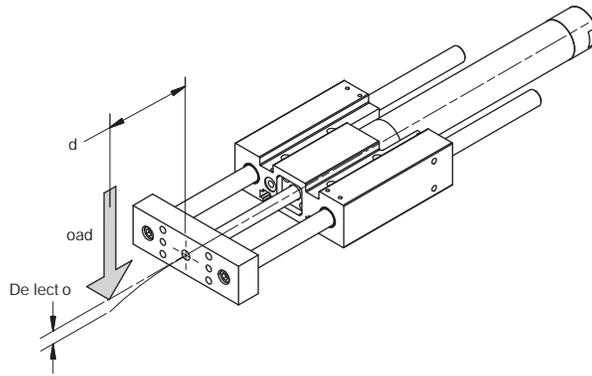

P5L Reach Slides

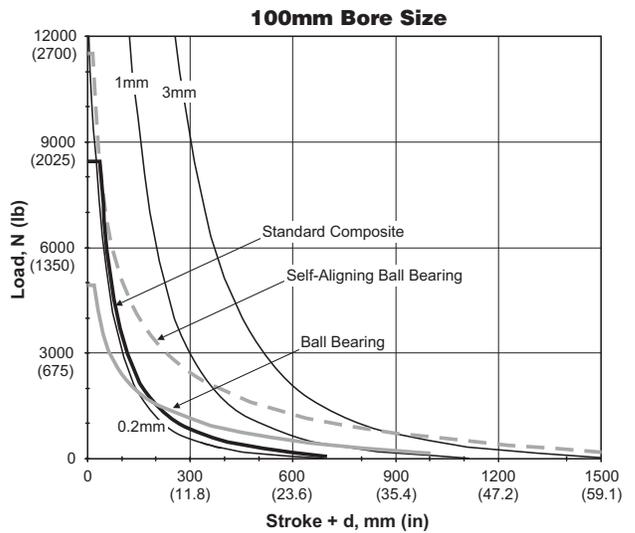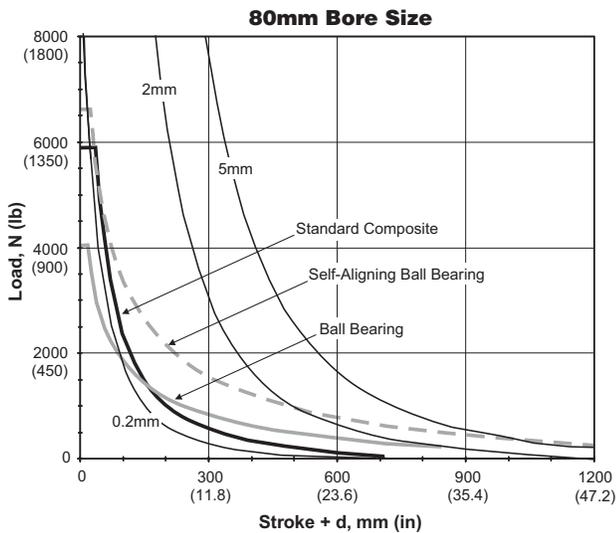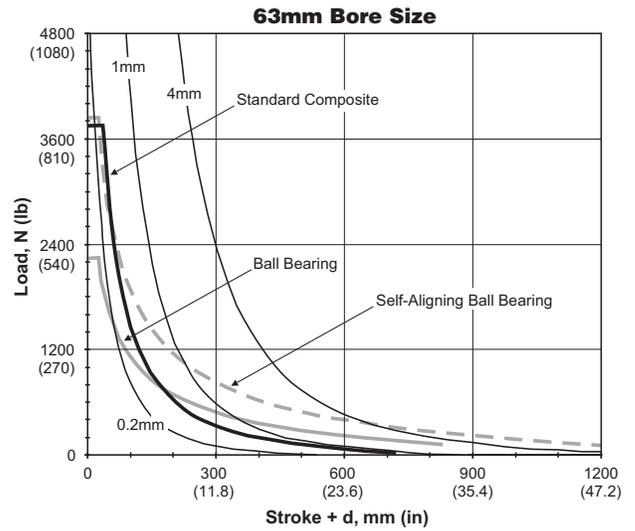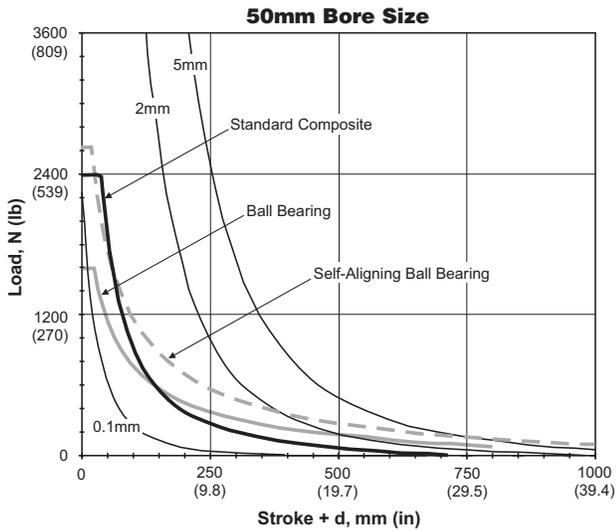

B
Guided Cylinders Actuator Products
P5T Series
P5L Series
HB Series
P5E Series

Horizontal Load Capacity & Deflection with Oversized Shafting

- Oversized Composite w/ Chrome Plated or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested side load at a given actuator stroke and distance (d) from the face of the tooling plate. The graphs include the weight of the support rods and tooling plate and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

See the P5L options section of this catalog for more bearing selection information.





Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.

Note: The following variables commonly affect the bearing life of a guided cylinder:


- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

B
 Guided Cylinders
 Actuator Products
 Series P5T
 Series P5L
 Series HB
 Series P5E





P5L Reach Slides

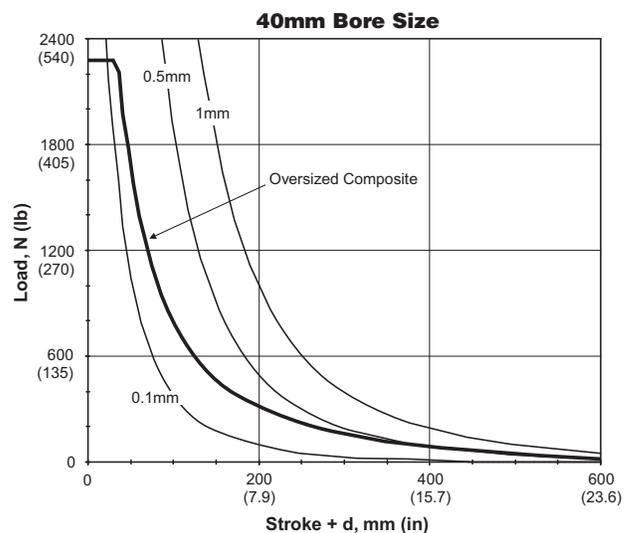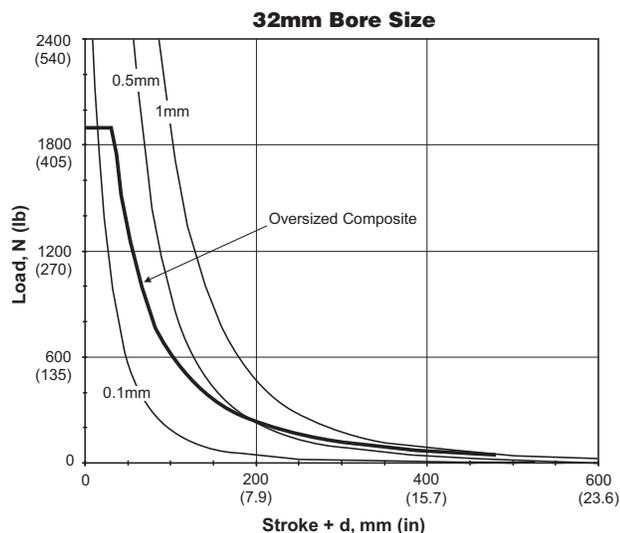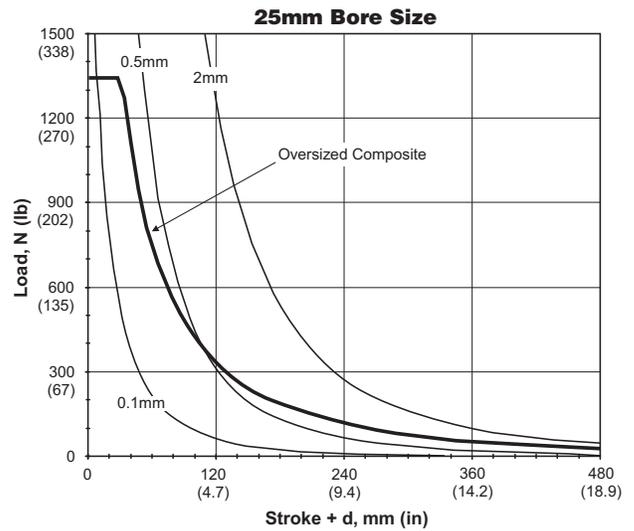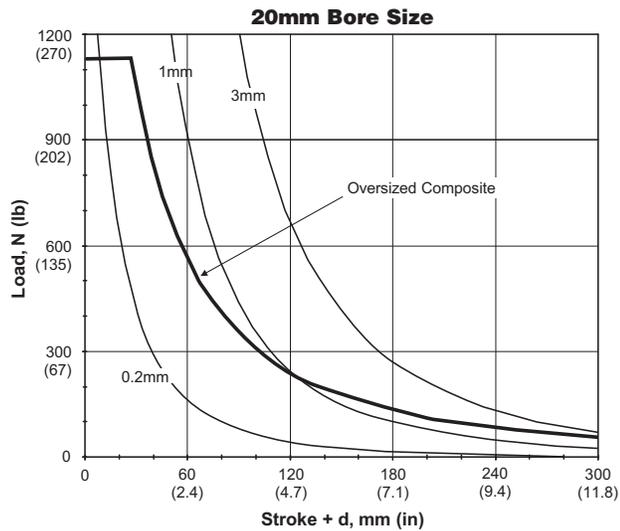

Horizontal Load Capacity & Deflection with Oversized Shafting

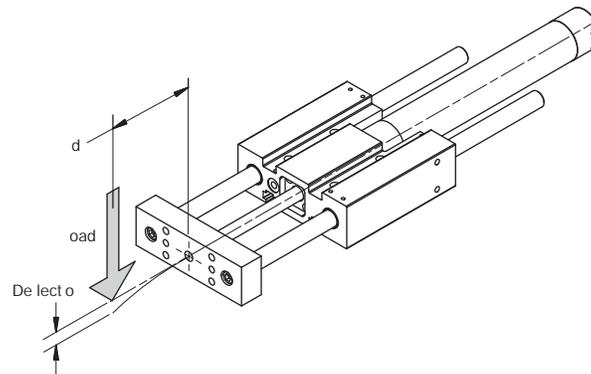

P5L Reach Slides

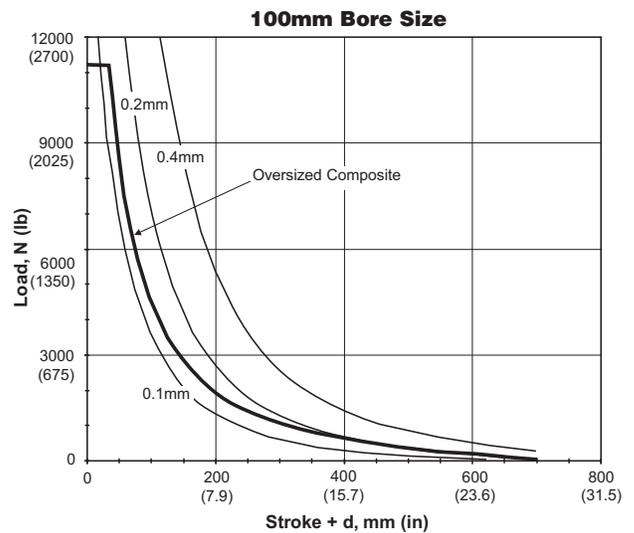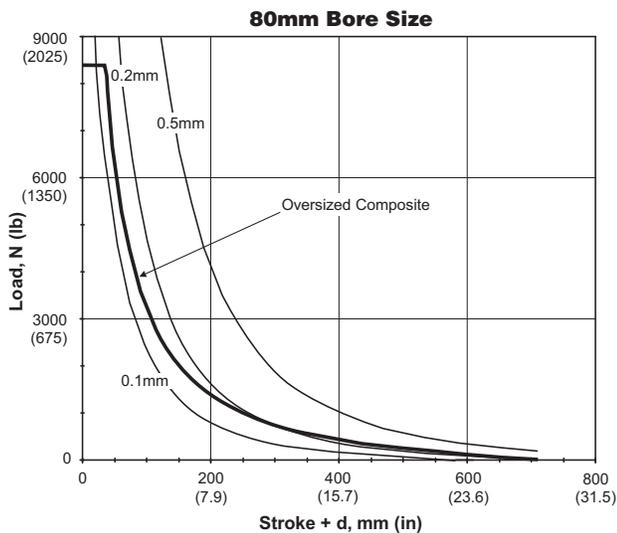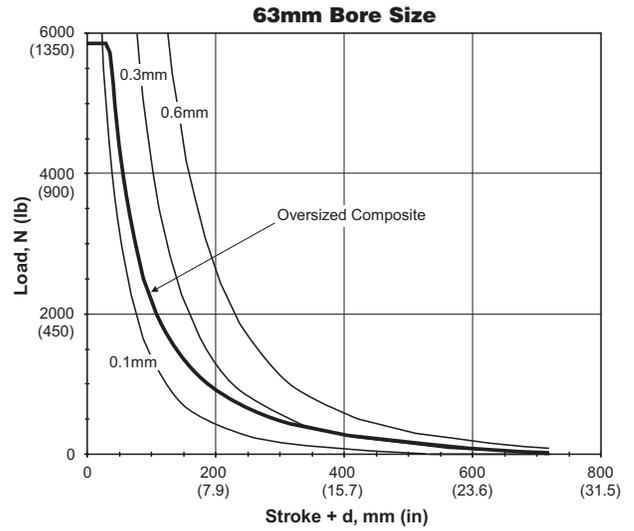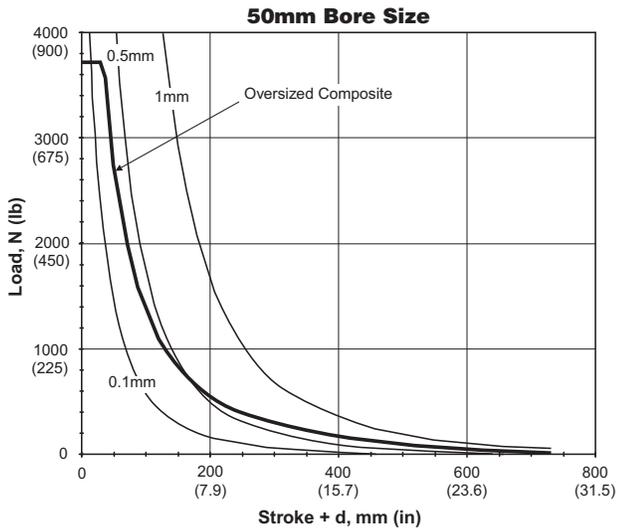

B	Guided Cylinders Actuator Products
	P5T Series
	P5L Series
	HB Series
P5E Series	

Asymmetrical Torque Capacity










- Standard Composite w/ Chrome Plated or Stainless Steel Rods
- Oversized Composite w/ Chrome Plated or Stainless Steel Rods
- Recirculating Ball Bearings w/ Carbon or Stainless Steel Rods
- Self Aligning Ball Bearings w/ Carbon or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested asymmetrical load at a given actuator stroke and distance (d) from the face of the tooling plate. The graphs

include the weight of the support rods and tooling plate and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application. An asymmetrical load is defined as a perpendicular load applied at some horizontal distance, “m” from the center of the tooling plate.

P5L Thrust Slides

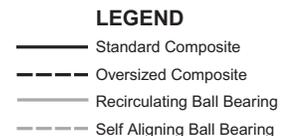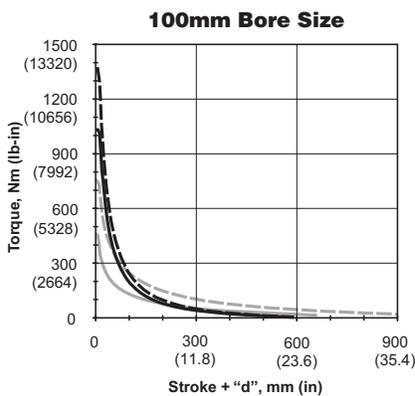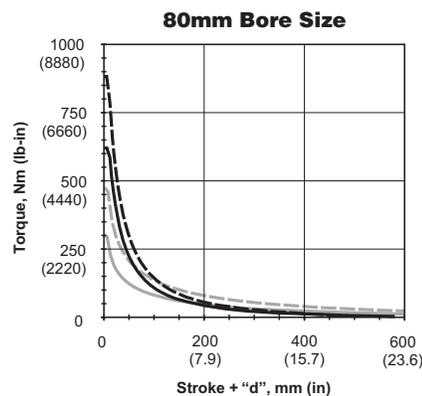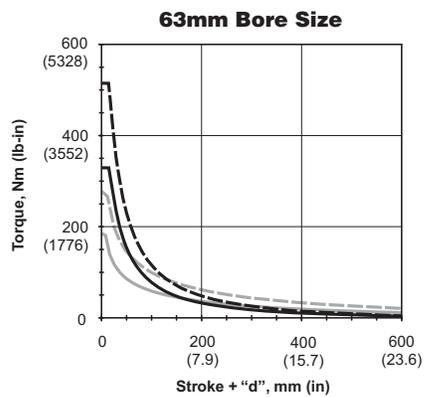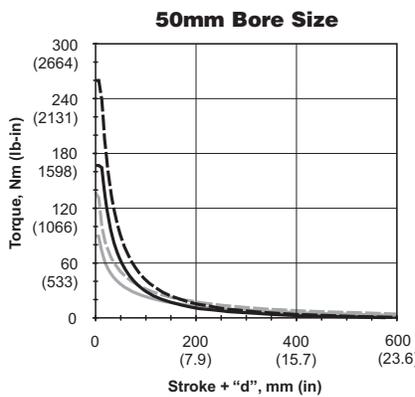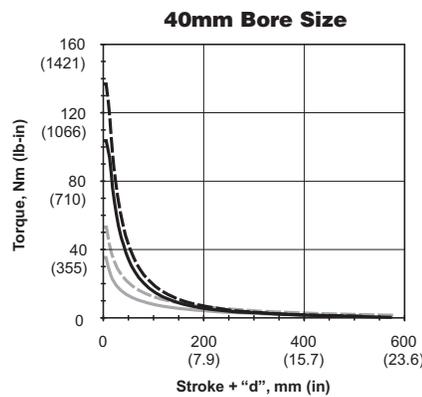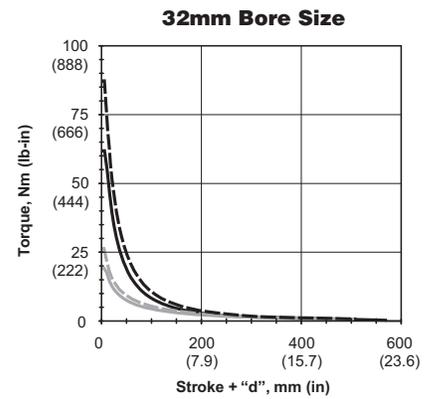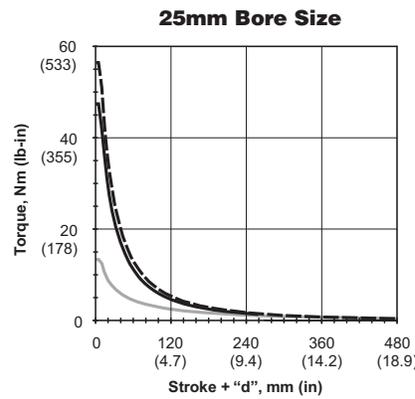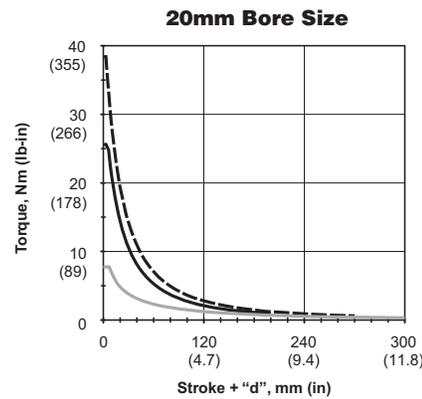


B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E




Asymmetrical Torque Capacity

Note: The following variables commonly affect the bearing life of a guided cylinder:

- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

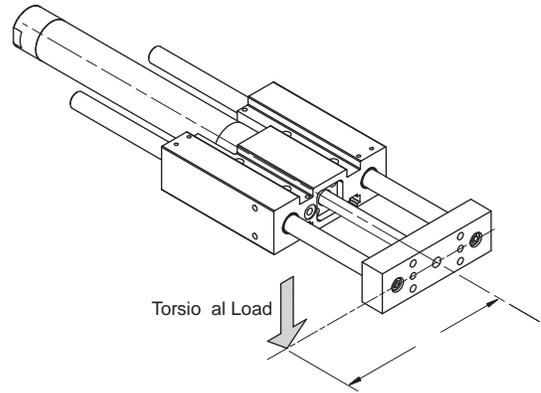

P5L Reach Slides

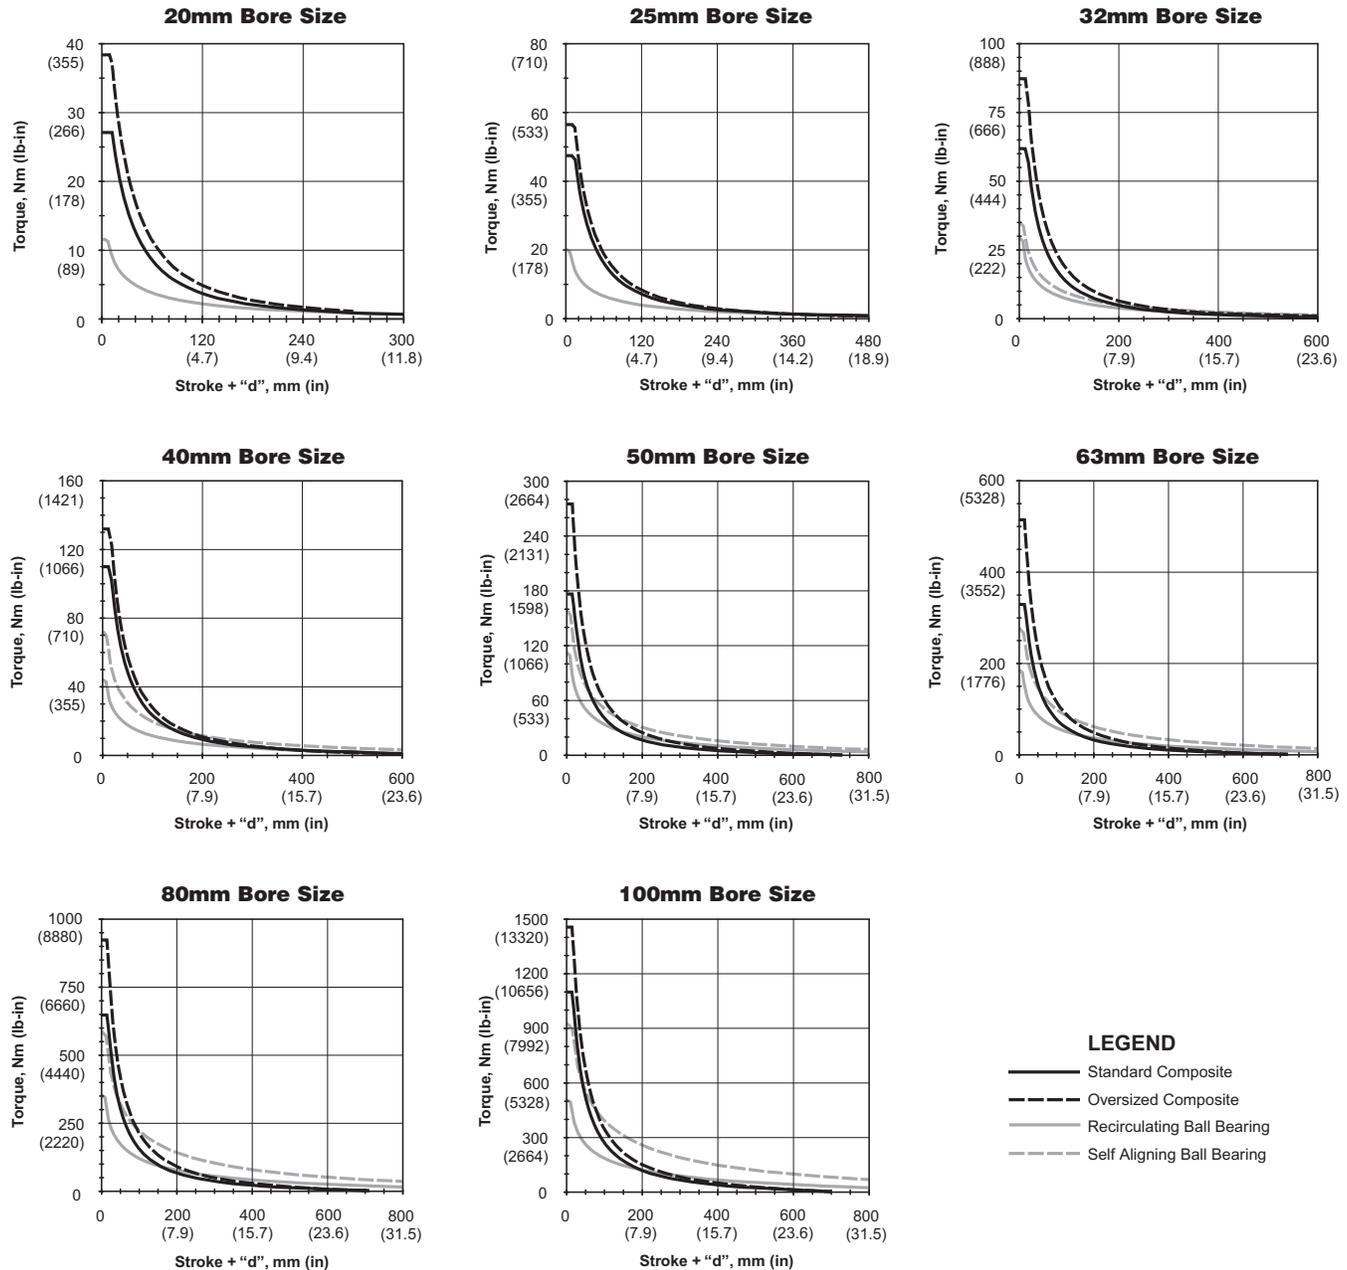

B	Guided Cylinders
	Actuator Products
P5T Series	
P5L Series	
HB Series	
P5E Series	

Vertical Eccentric Load Capacity

- Standard Composite w/ Chrome Plated or Stainless Steel Rods
- Oversized Composite w/ Chrome Plated or Stainless Steel Rods
- Recirculating Ball Bearings w/ Carbon or Stainless Steel Rods
- Self Aligning Ball Bearings w/ Carbon or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested eccentric load based on a stroke of 100mm (4 inches).


An eccentric load is defined as a load applied in the same direction as the motion of the cylinder however, acting at some distance (eccentricity "h") from the center of the tooling plate. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.

Note: The following variables commonly affect the bearing life of a guided cylinder:


- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

P5L Thrust Slides









B	Guided Cylinders
	Actuator Products
Series	P5T
	P5L
Series	HB
	P5E

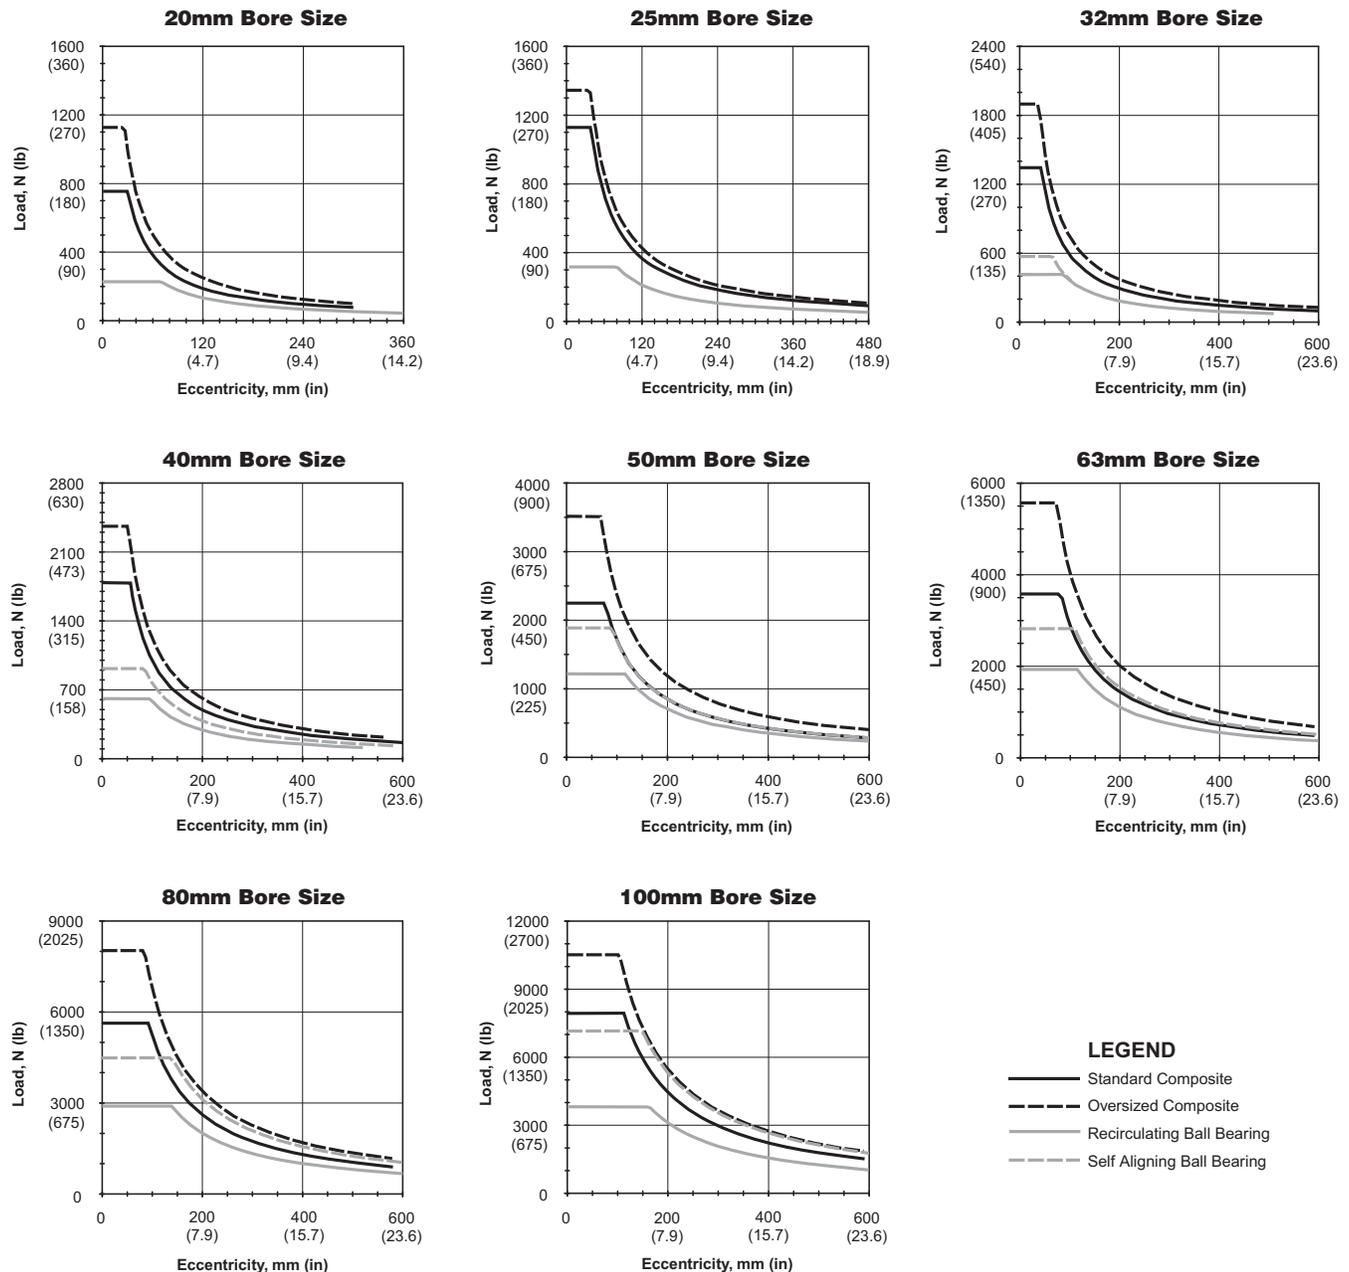

Vertical Eccentric Load Capacity

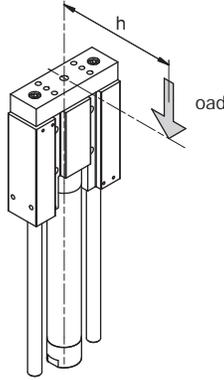

P5L Reach Slides

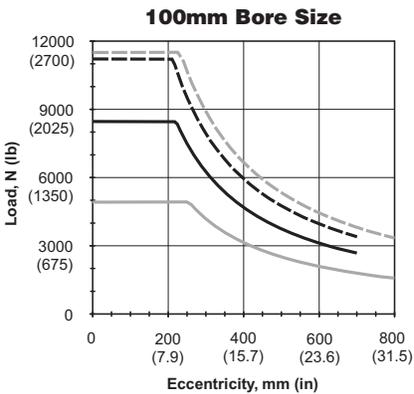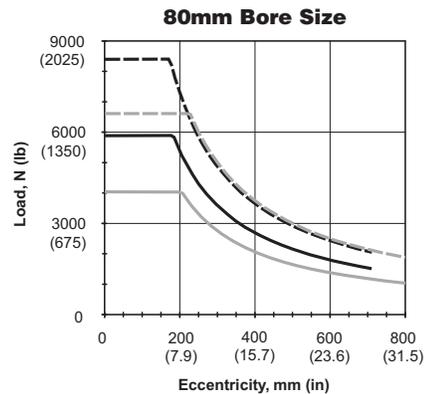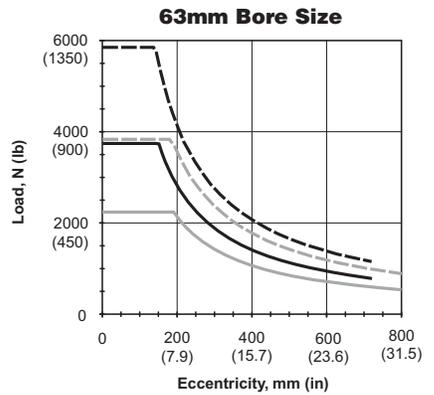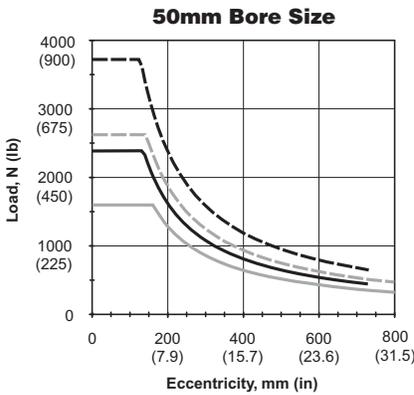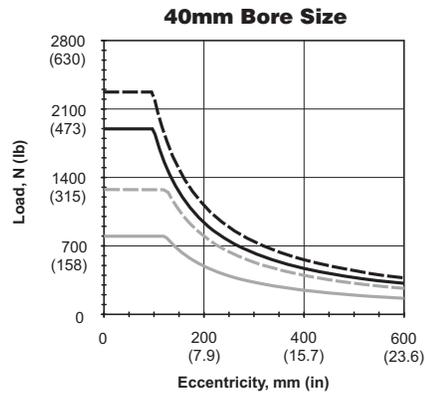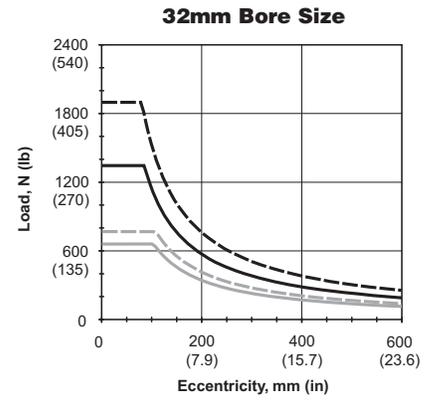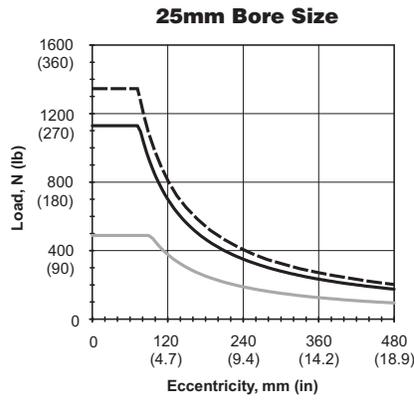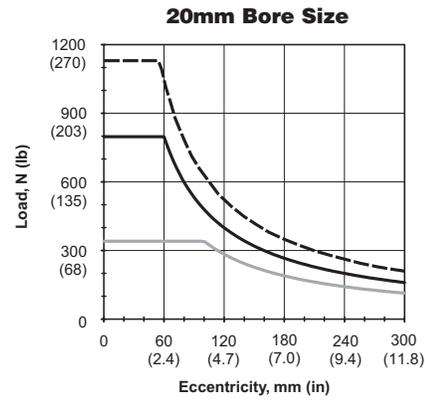

LEGEND

- Standard Composite
- - - Oversized Composite
- Recirculating Ball Bearing
- - - Self Aligning Ball Bearing

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

Horizontal Load Capacity & Deflection with Standard Shafting

- Standard Composite w/ Chrome Plated or Stainless Steel Rods
- Recirculating Ball Bearings w/ Carbon or Stainless Steel Rods
- Self Aligning Ball Bearings w/ Carbon or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested side load at a given actuator stroke. The graphs include the weight of the carriage and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

See the P5L options section of this catalog for more bearing selection information.

Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.





Note: The following variables commonly affect the bearing life of a guided cylinder:

- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)


B
 Guided Cylinders
 Actuator Products

Series P5T
 Series P5L
 Series HB
 Series P5E





P5L Base Slides

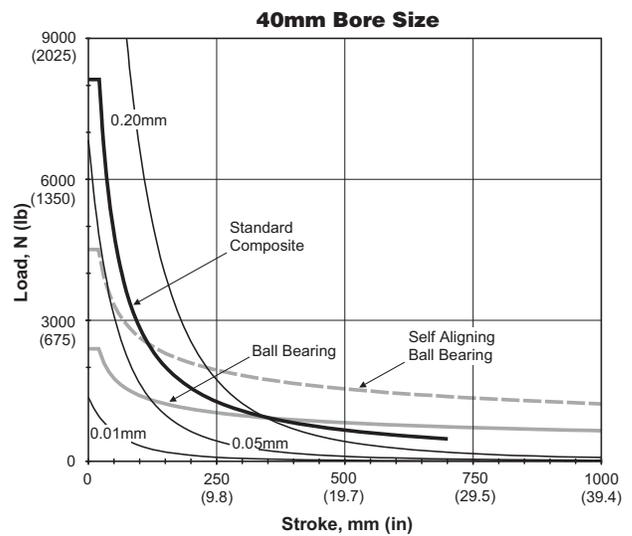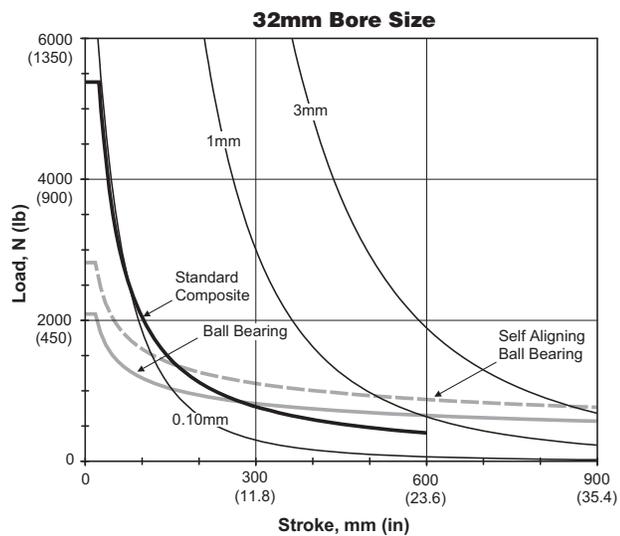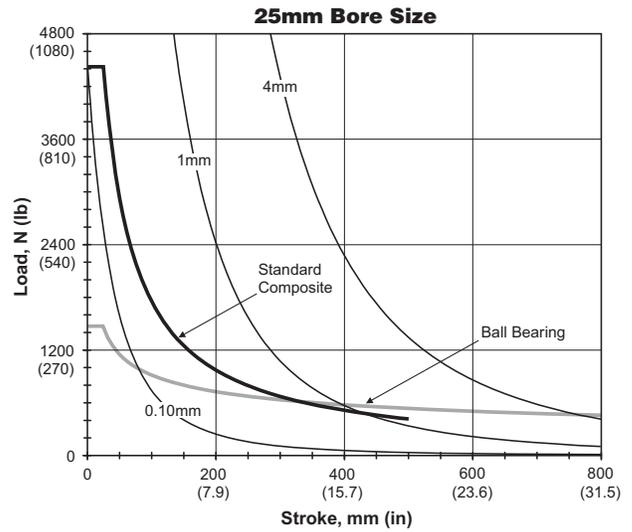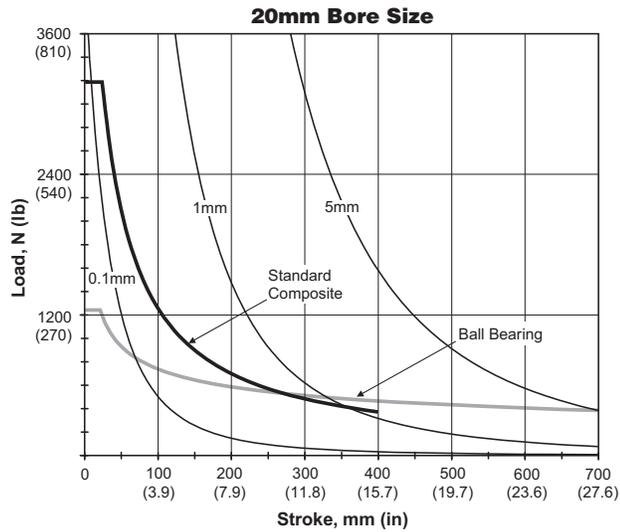

Horizontal Load Capacity & Deflection with Standard Shafting

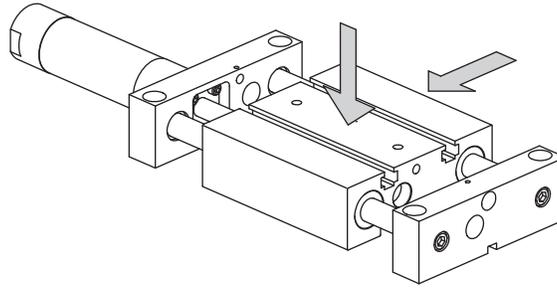

P5L Base Slides

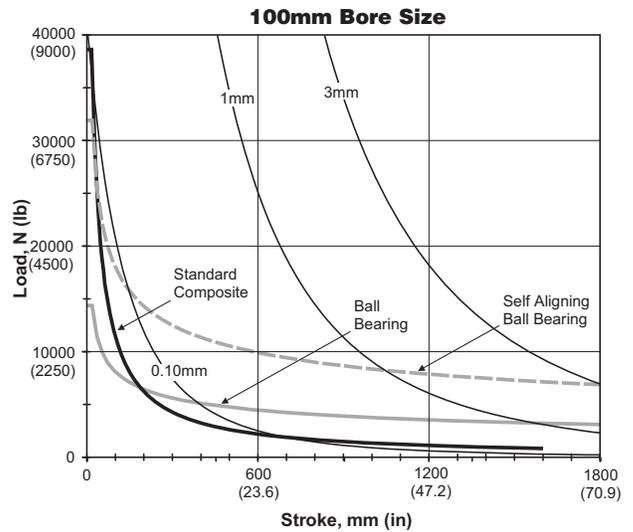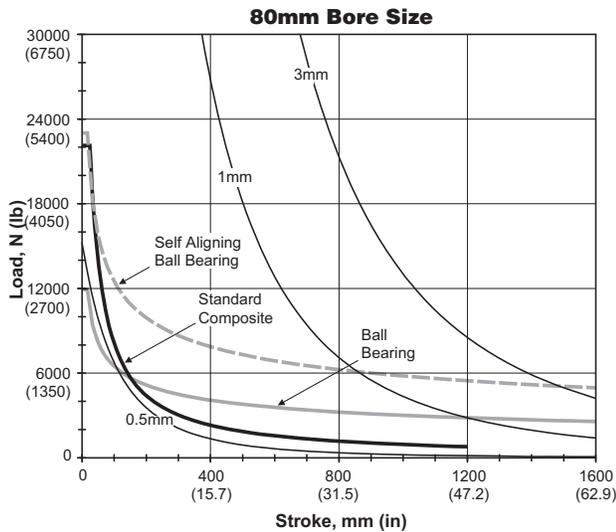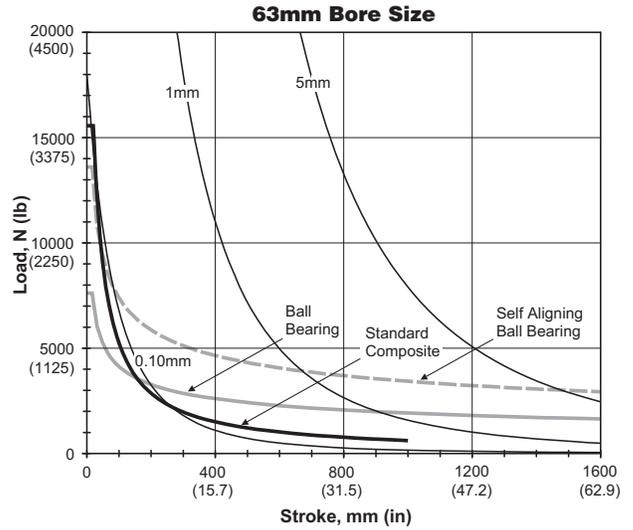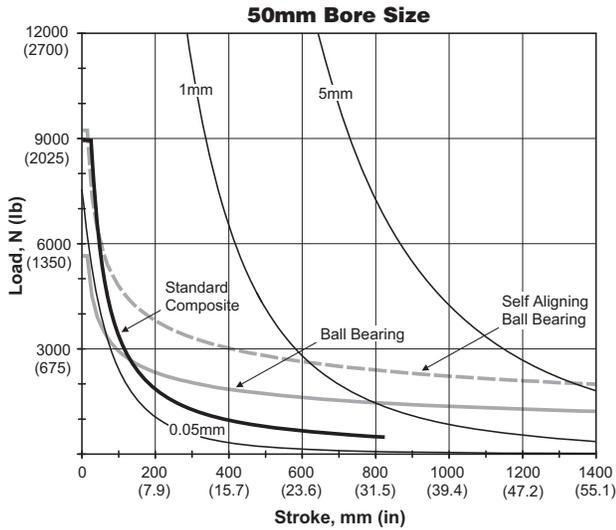

B

Guided Cylinders
 Actuator Products

P5T
 Series

P5L
 Series

HB
 Series

P5E
 Series

Horizontal Load Capacity & Deflection with Oversized Shafting

- Oversized Composite w/ Chrome Plated or Stainless Steel Rods

The graphs on the following two pages illustrate the maximum suggested side load at a given actuator stroke. The graphs include the weight of the carriage and are based on a bearing life of 10 million cycles under a dynamic loading condition. For an equivalent static load capacity multiply the information in these graphs by 1.5.

See the P5L options section of this catalog for more bearing selection information.





Dynamic loading is defined as a load which is affixed to the actuator tooling plate during the extend or retract motion of the actuator. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application.

Note: The following variables commonly affect the bearing life of a guided cylinder:


- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E





P5L Base Slides

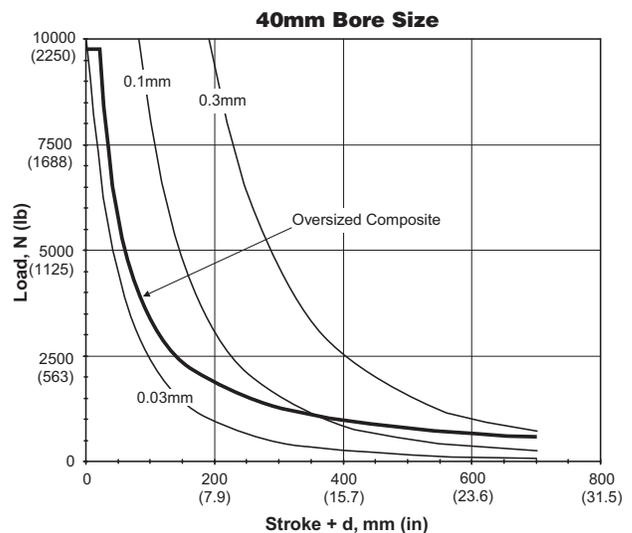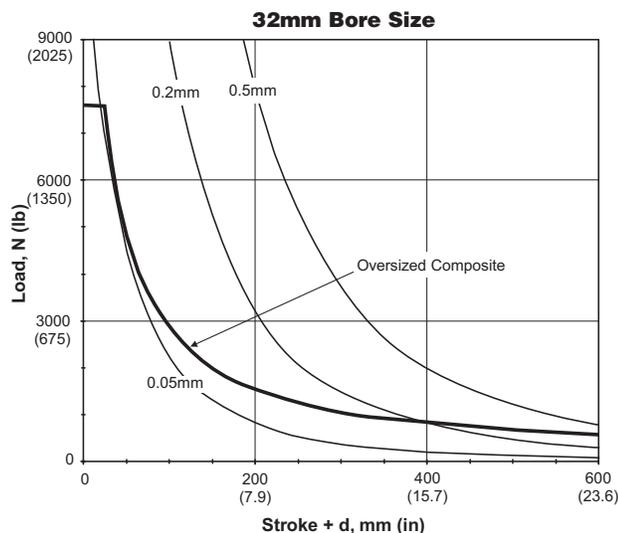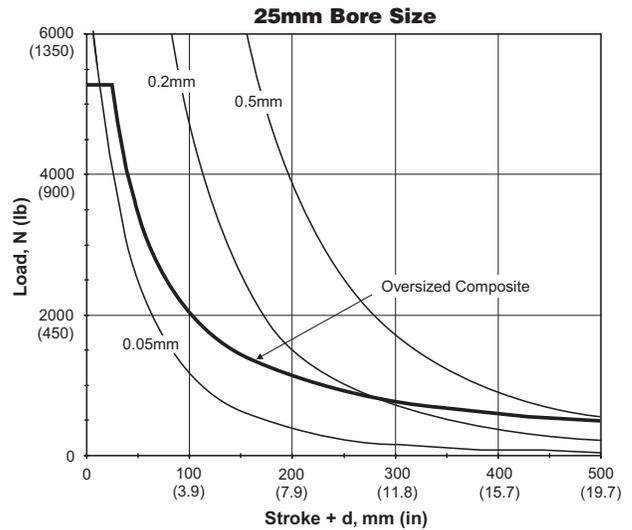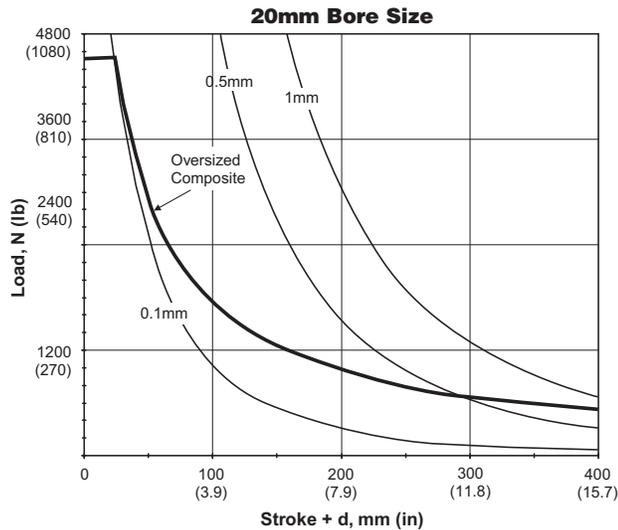

Horizontal Load Capacity & Deflection with Oversized Shafting

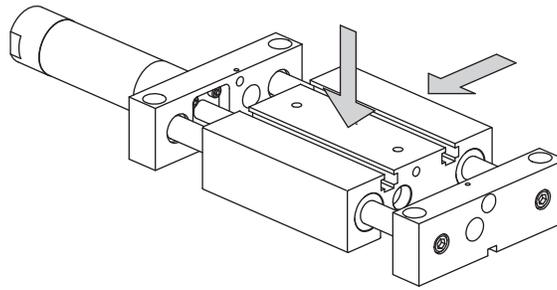

P5L Base Slides

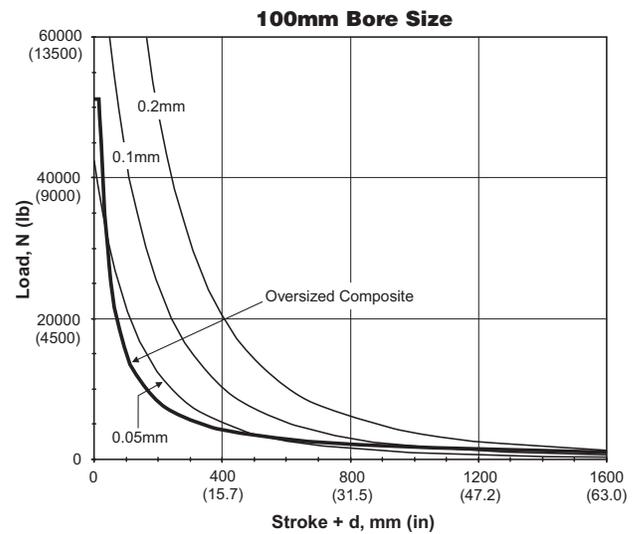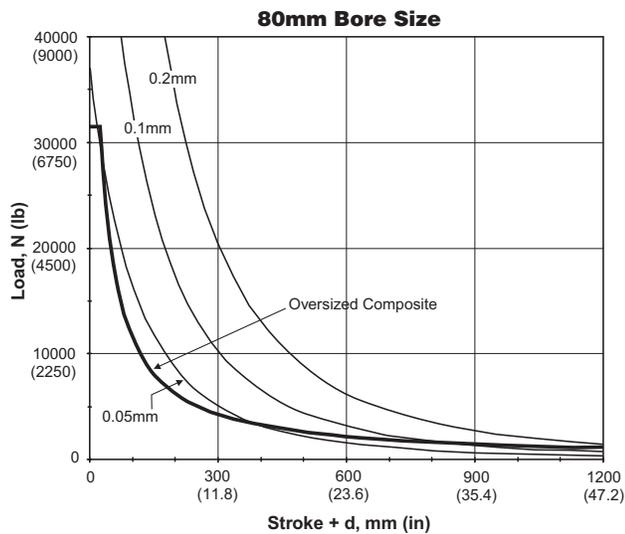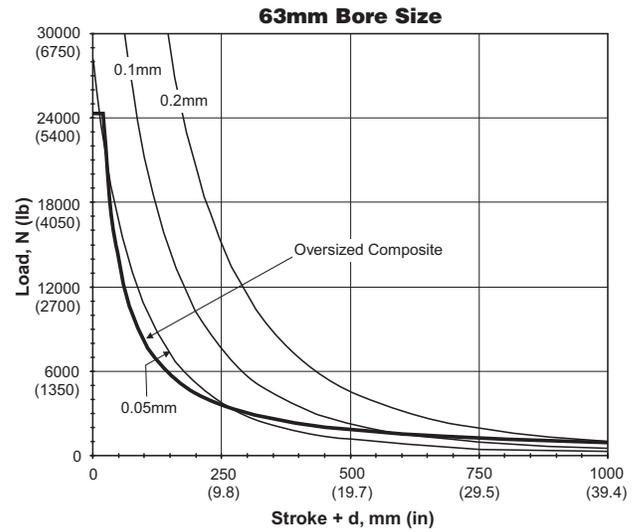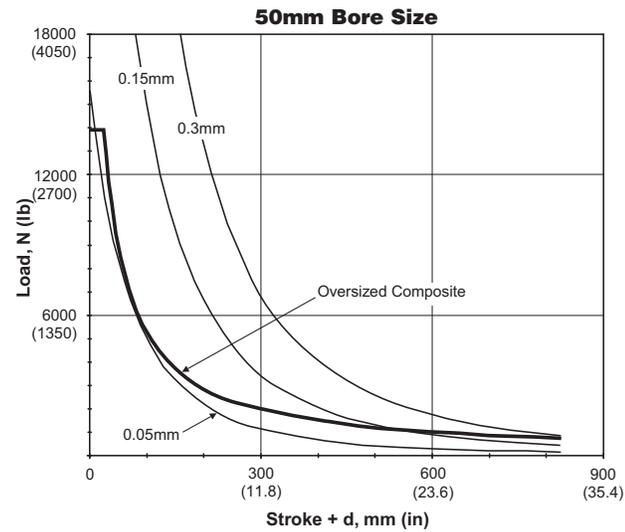

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

Symmetrical Roll Torsional Loading

The graphs on the following two pages illustrate the maximum suggested roll load at a given actuator stroke. It is assumed that the moment loading is acting about the centerline of the carriage. The graphs include the weight of the carriage and are based on a bearing life of 10 million cycles under a dynamic loading condition. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application. For an equivalent static load capacity multiply the information in these graphs by 1.5.









Heavy lines show loading; lighter lines show various degrees of deflection.

Note: The following variables commonly affect the bearing life of a guided cylinder:

- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

Standard Shafting

B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E

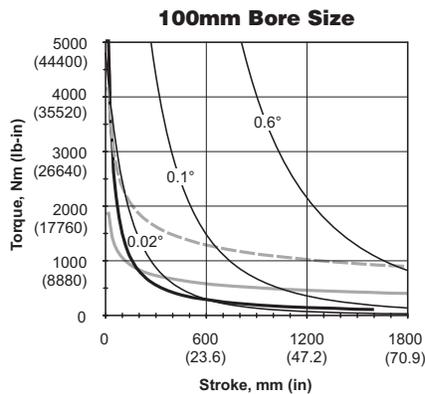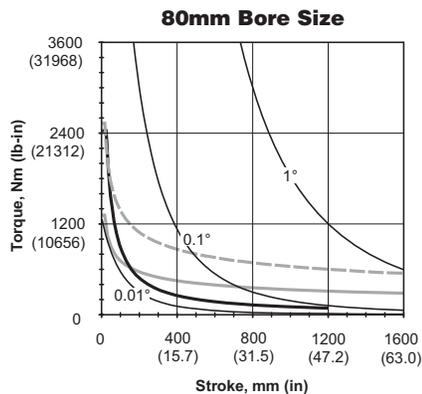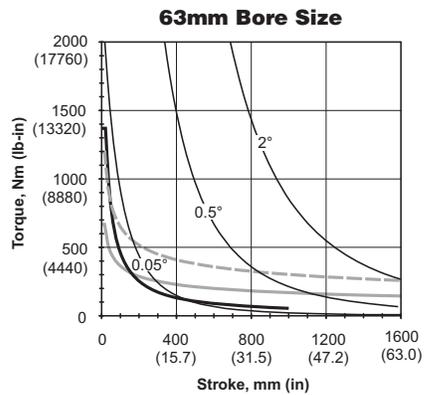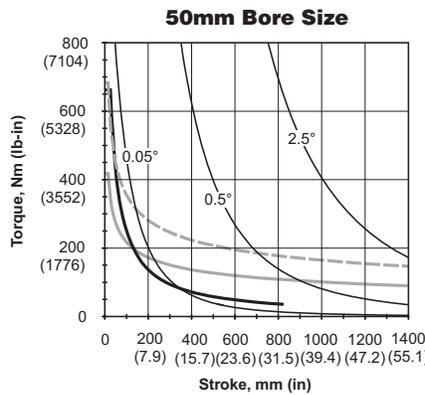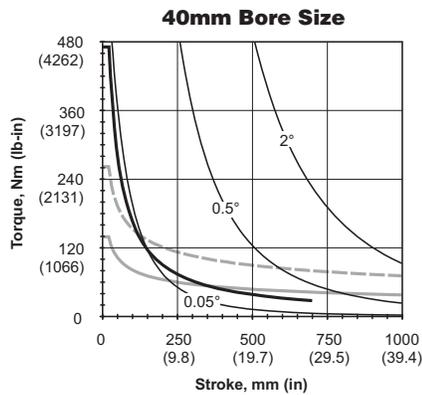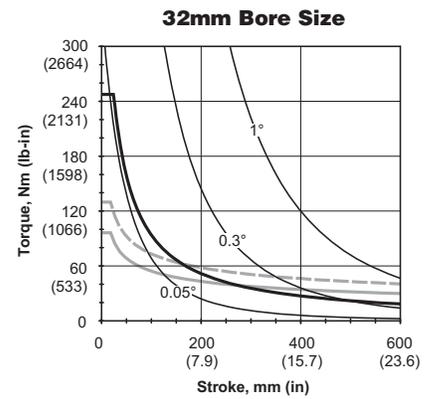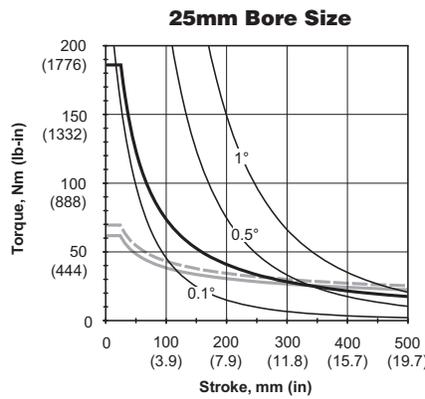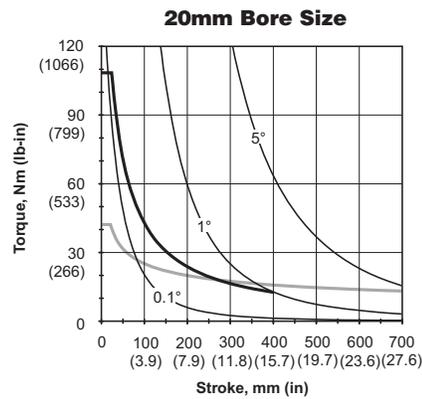


LEGEND









- Standard Composite
- Recirculating Ball Bearing
- - - Self Aligning Ball Bearing



Symmetrical Roll Torsional Loading

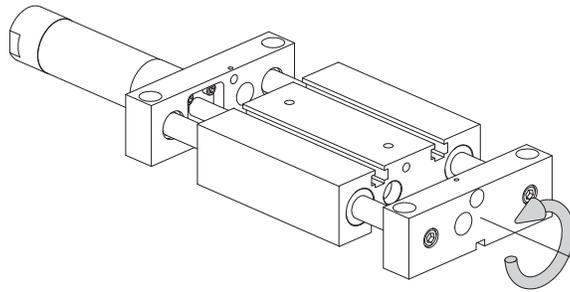

Oversized Shafting

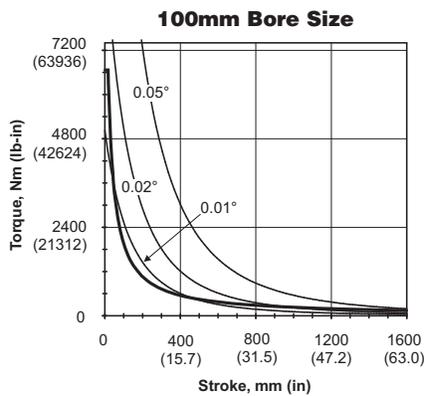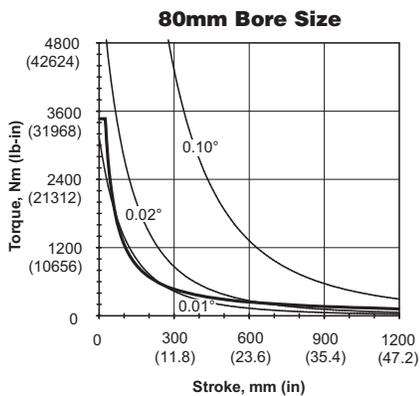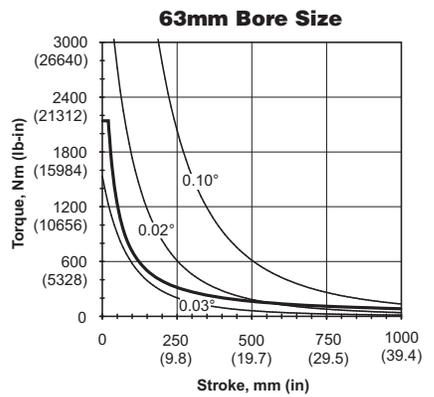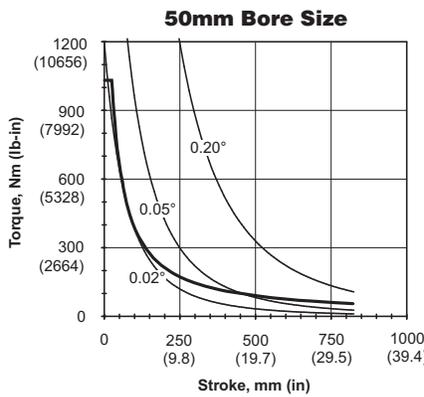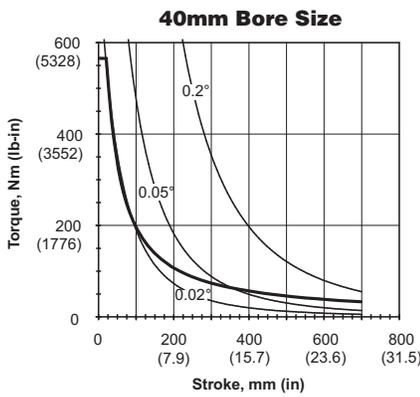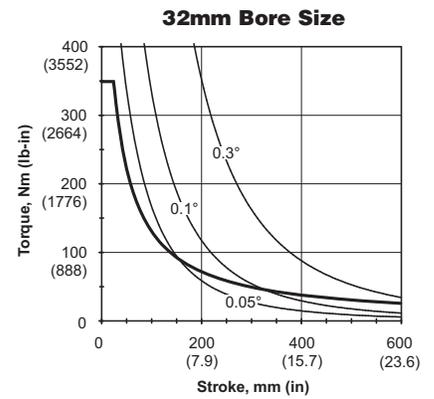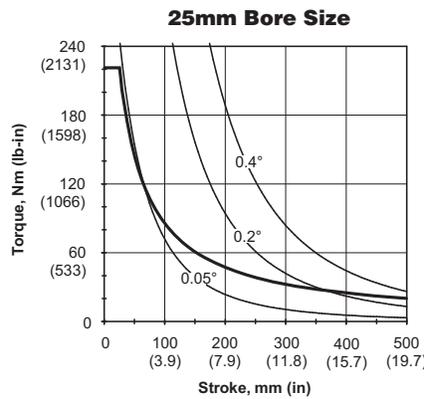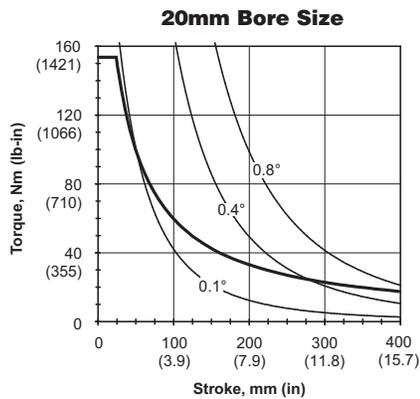

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

Symmetrical Pitch Torsional Loading

The graphs on the following two pages illustrate the maximum suggested pitch load at a given actuator stroke. It is assumed that the moment loading is acting about the centerline of the carriage. The graphs include the weight of the carriage and are based on a bearing life of 10 million cycles under a dynamic loading condition. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application. For an equivalent static load capacity multiply the information in these graphs by 1.5.


Heavy lines show loading; lighter lines show various degrees of deflection.

Note: The following variables commonly affect the bearing life of a guided cylinder:


- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E









Standard Shafting

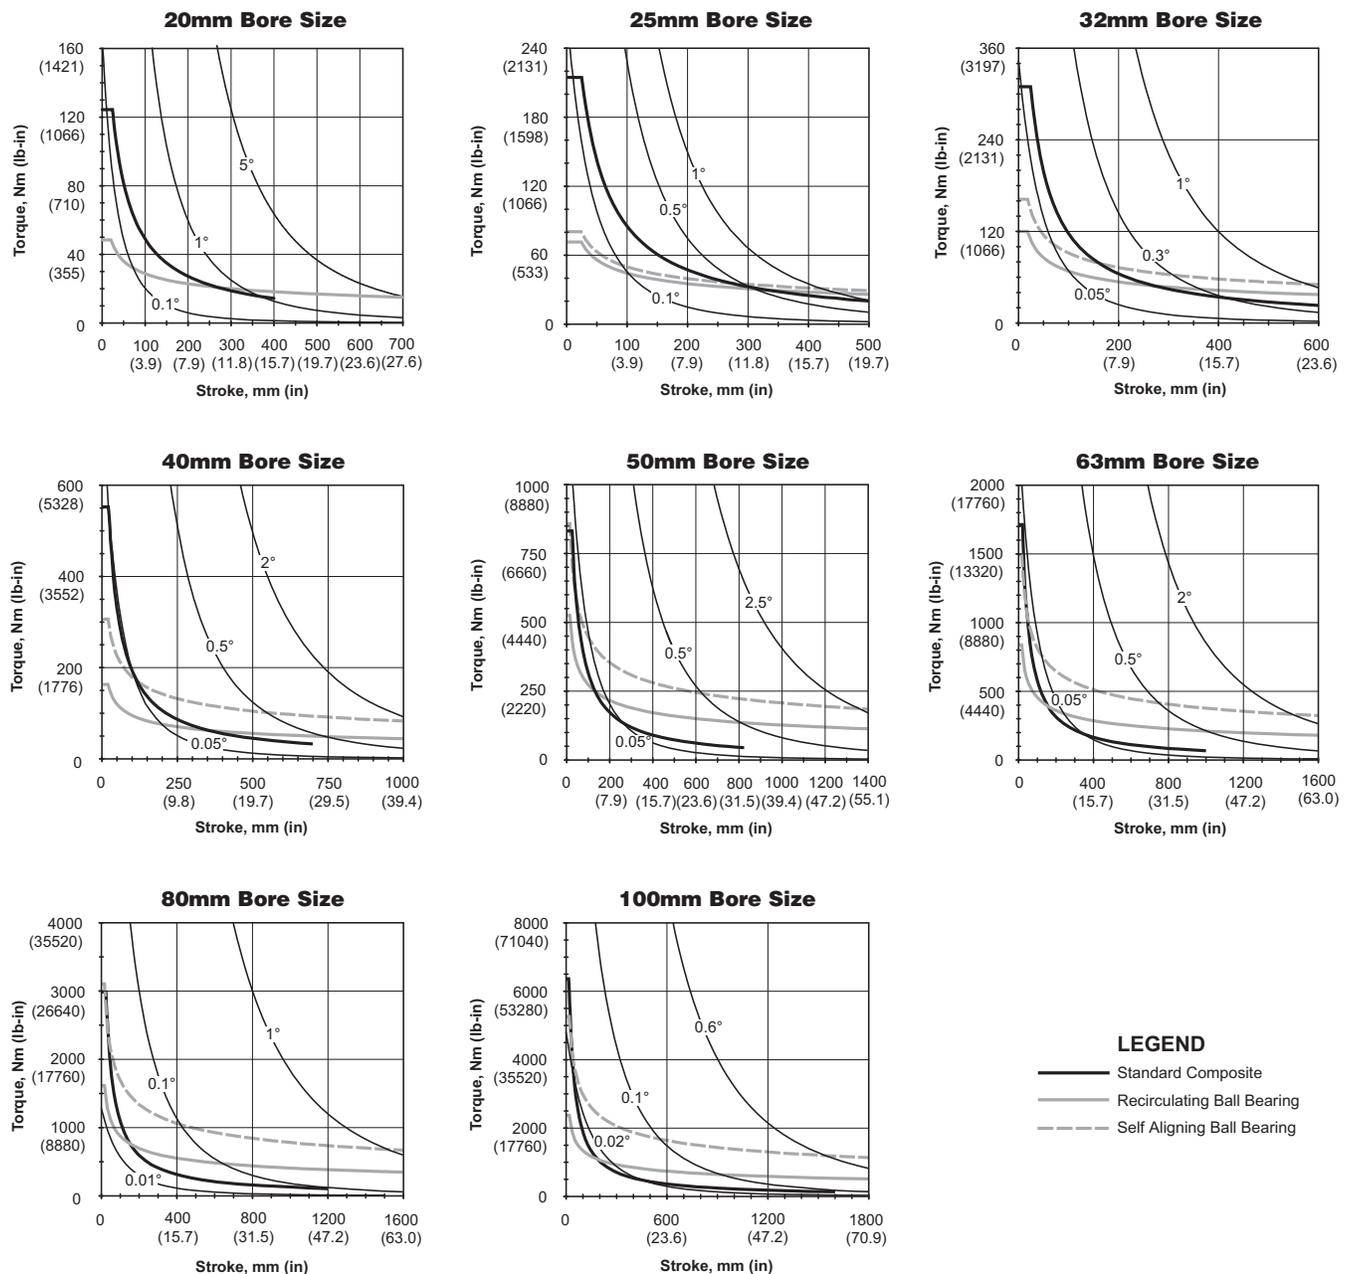

Symmetrical Pitch Torsional Loading

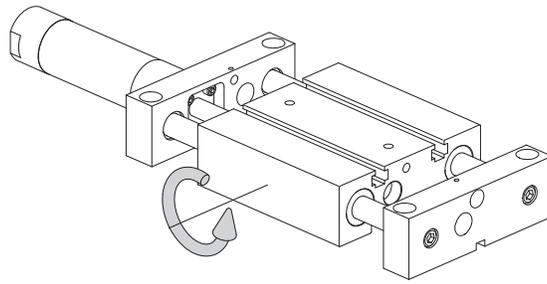

Oversized Shafting

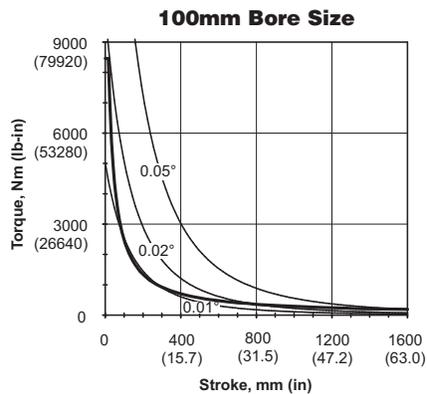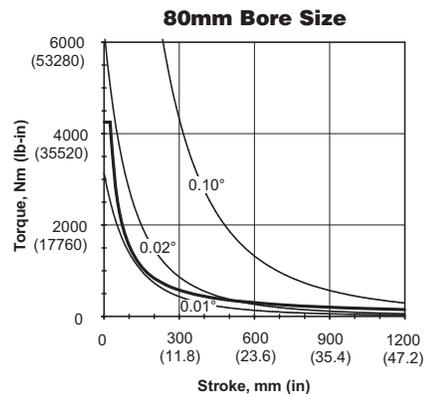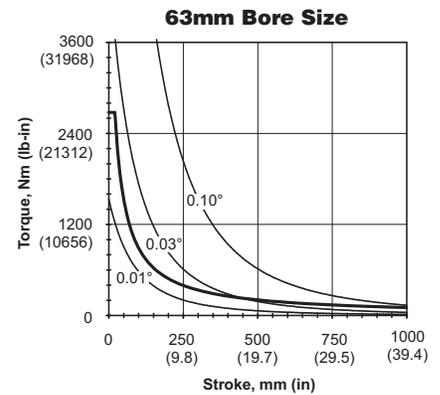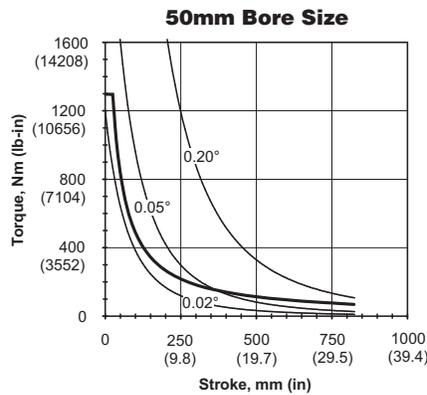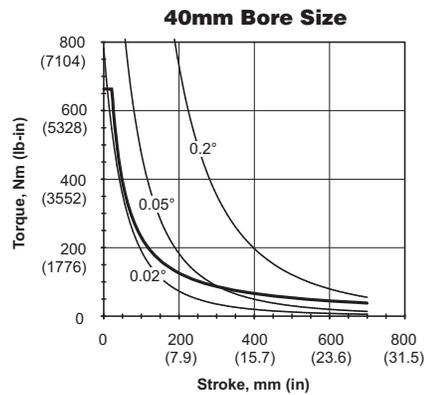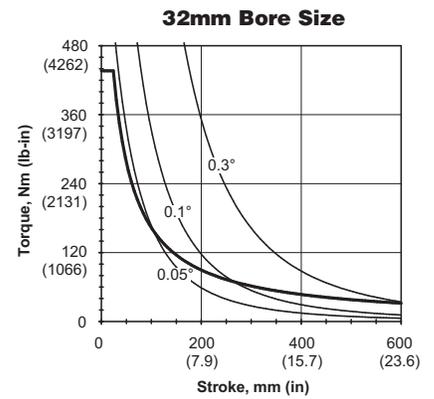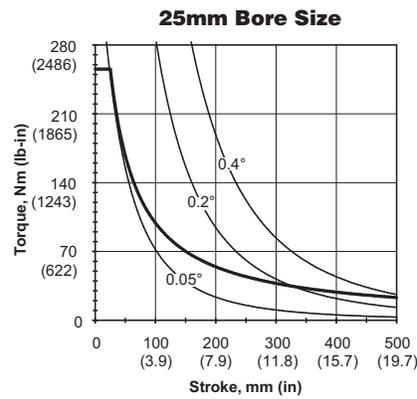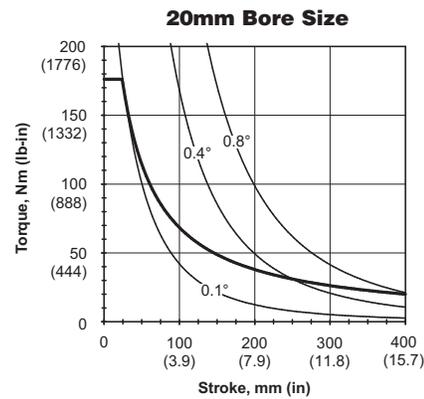

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

Symmetrical Yaw Torsional Loading

The graphs on the following two pages illustrate the maximum suggested yaw load at a given actuator stroke. It is assumed that the moment loading is acting about the centerline of the carriage. The graphs include the weight of the carriage and are based on a bearing life of 10 million cycles under a dynamic loading condition. Capacities are based on bearing and shafts only. Mounting bolts/hardware should be investigated per customer application. For an equivalent static load capacity multiply the information in these graphs by 1.5.









Heavy lines show loading; lighter lines show various degrees of deflection.

Note: The following variables commonly affect the bearing life of a guided cylinder:

- Velocity
- Vibration
- Orientation
- Environment (Dust, moisture, etc.)

Standard Shafting

B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E

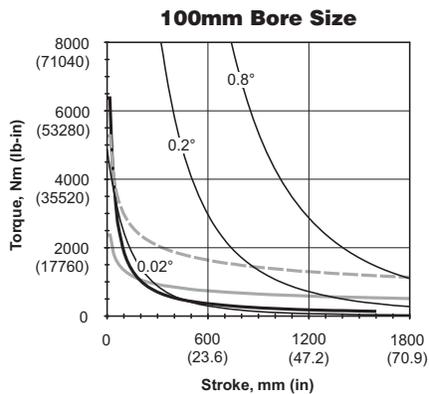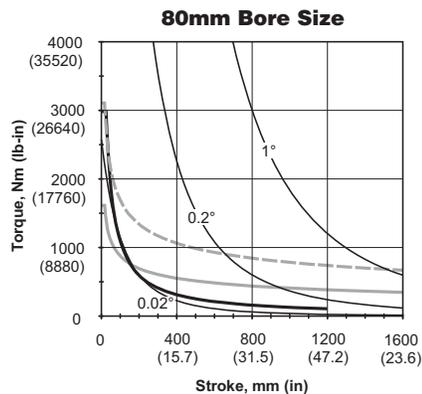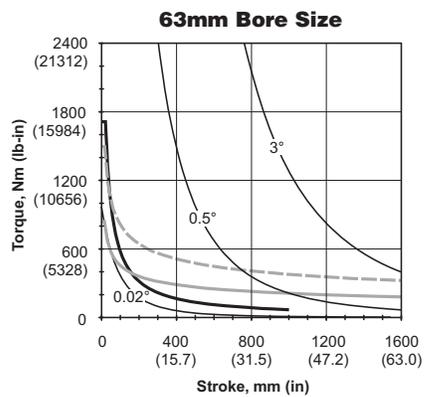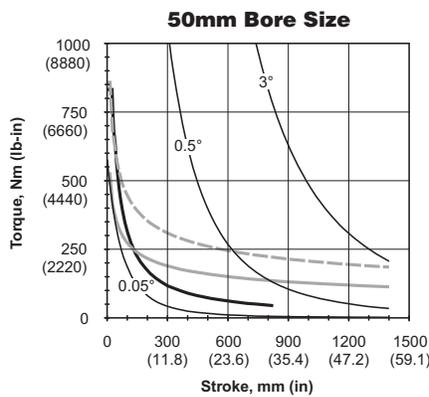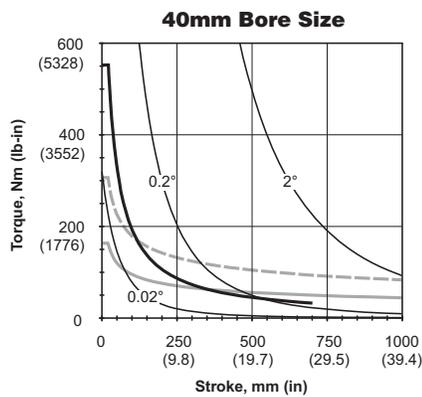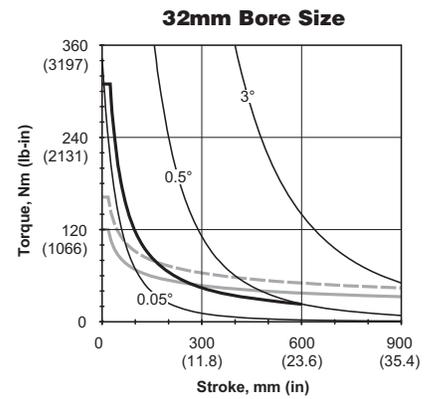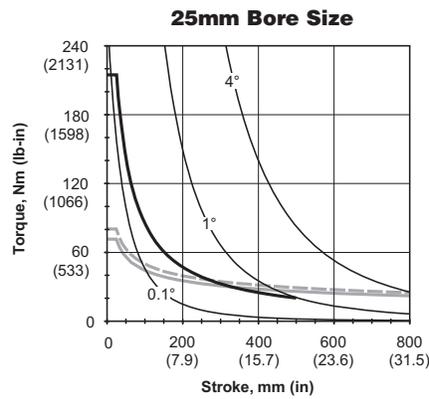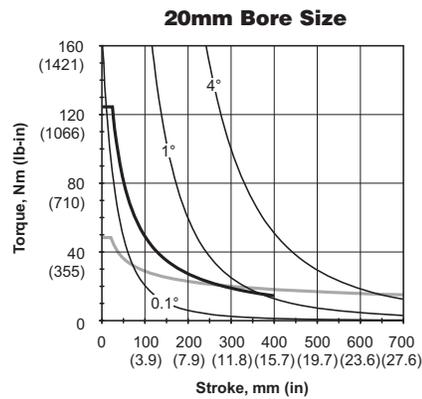


LEGEND









- Standard Composite
- Recirculating Ball Bearing
- - - Self Aligning Ball Bearing



Symmetrical Yaw Torsional Loading

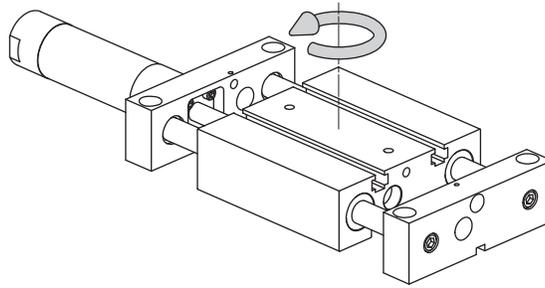


Oversized Shafting

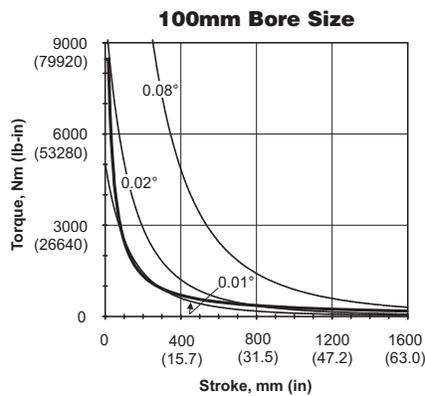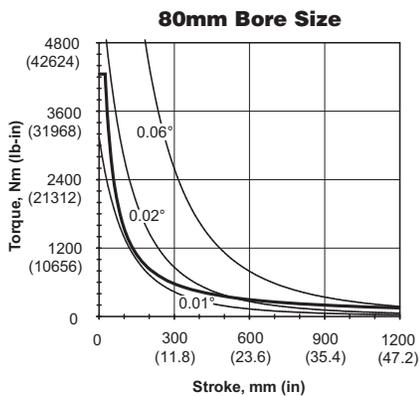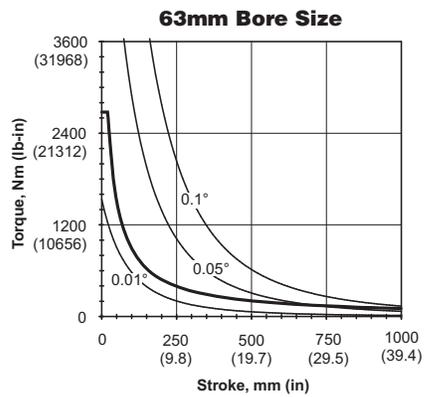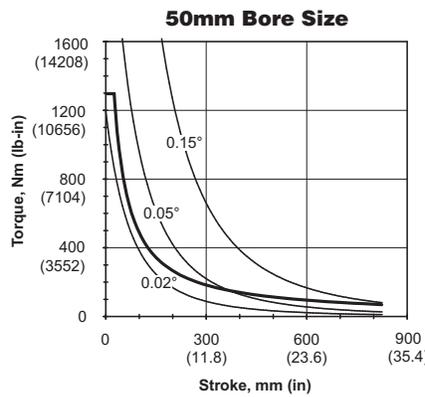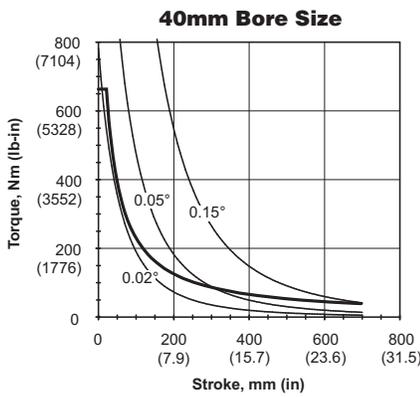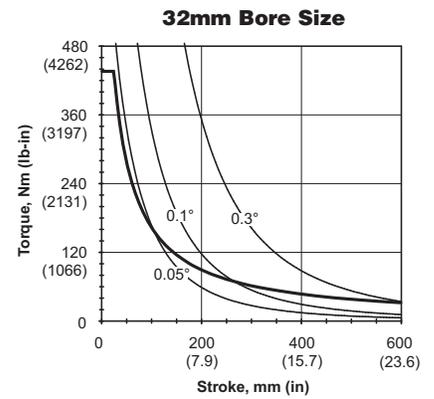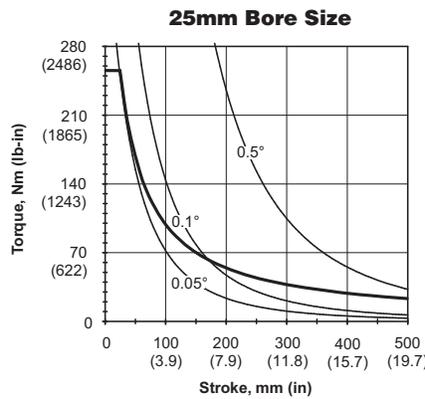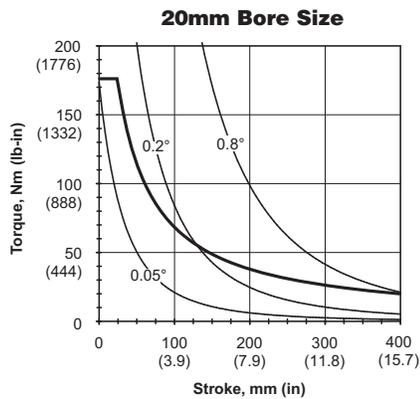

B	Guided Cylinders
	Actuator Products
P5T Series	
P5L Series	
HB Series	
P5E Series	



HBC Series

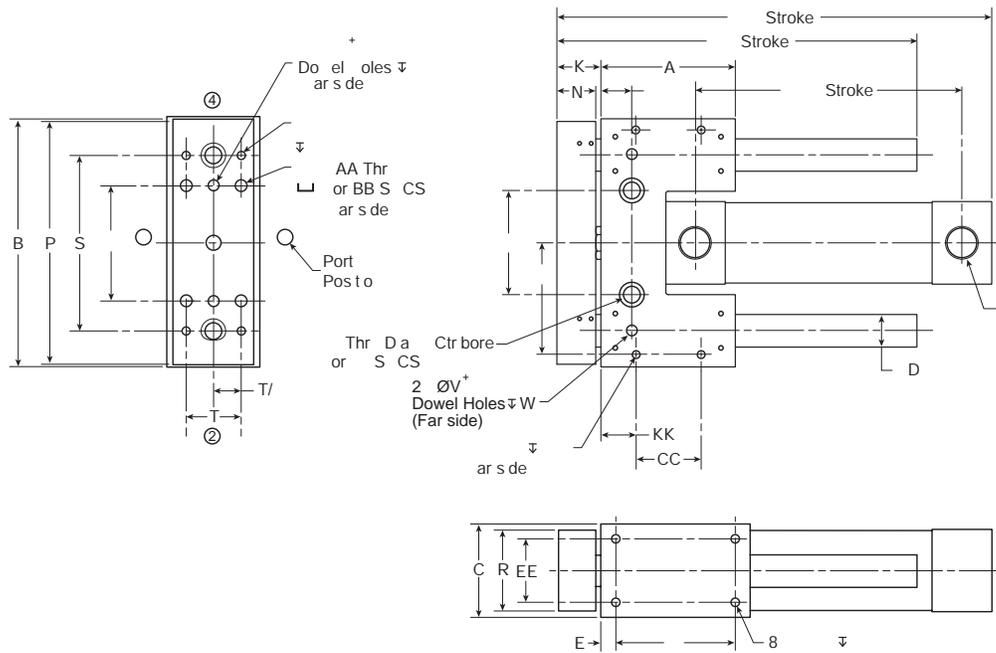

Model number	A	B	C	Ds*	Do**	E	F NPTF	F BSPP	K	L	M	N	P	R	S	T	U
15 ¹	3.25	6.00	2.25	20mm (0.79)	25mm (0.98)	0.375	1/4 ¹	1/4	1.06	5.19	6.26	0.94	5.88	1.94	4.250	1.375	2.750
20	4.00	7.25	2.75	25mm (0.98)	30mm (1.18)	0.500	3/8	1/4	1.31	6.39	7.00	1.19	7.13	2.44	5.000	1.750	3.250
25	5.00	9.00	3.25	30mm (1.18)	35mm (1.38)	0.500	3/8	3/8	1.56	7.82	8.38	1.44	8.88	2.88	6.500	2.000	3.750

Model number	V	W	X	Y	AA	BB	CC	EE	FF	GG	HH	JJ	KK	LL	MM
15 ¹	0.251	0.27	2.750	0.750	0.28	1/4	1.750	1.500	2.31	0.50	1/4-20	2.50	0.75	3/8	2.500
20	0.313	0.33	3.250	0.750	0.34	5/16	2.250	1.750	2.31	0.63	5/16-18	3.00	0.88	3/8	3.000
25	0.376	0.39	4.000	1.532	0.41	3/8	3.000	2.250	2.38	0.75	3/8-16	4.00	1.00	1/2	4.000

* Standard shafting
 ** Oversized shafting
 1 Model 15 with Cylinder Type 3A (3MA cylinder) has 3/8" NPTF ports.

All dimensions in inches unless otherwise noted.

B

Guided Cylinders
Actuator Products


P5T Series

P5L Series

HB Series

P5E Series

HBT Series

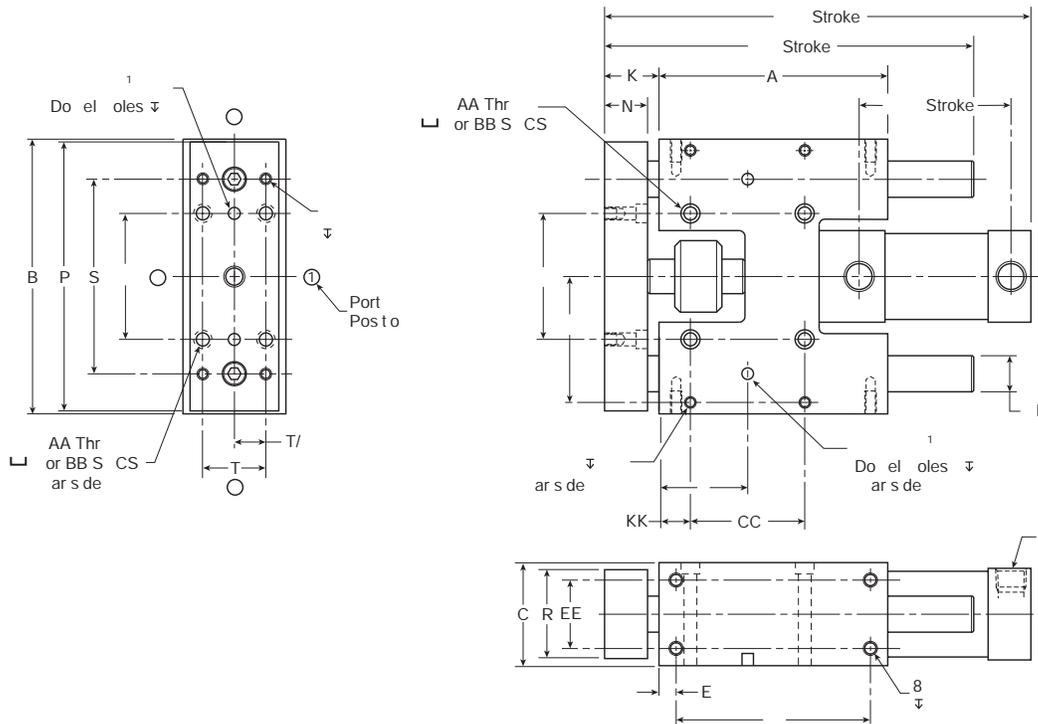

B
 Guided Cylinders
 Actuator Products

Series
 PST

Series
 P5L

Series
 HB

Series
 P5E


Model number	A	B	C	Ds*	Do**	E	F NPTF	F BSPP	K	L	M	N	P	R	S	T
15	5.0	6.00	2.25	20mm (0.79)	25mm (0.98)	0.375	1/4 1	1/4	1.06	6.94	8.19	0.94	5.88	1.94	4.250	1.375
20	5.5	7.25	2.75	25mm (0.98)	30mm (1.18)	0.500	3/8	1/4	1.31	7.88	8.94	1.19	7.13	2.44	5.000	1.750
25	6.5	9.00	3.25	30mm (1.18)	35mm (1.38)	0.500	3/8	3/8	1.56	9.31	10.31	1.44	8.88	2.88	6.500	2.000

Model number	U	V	W	X	Y	AA	BB	CC	EE	FF	GG	HH	JJ	KK
15	2.750	0.251	0.27	2.750	1.938	0.28	1/4	2.500	1.500	2.31	0.50	1/4-20	4.25	0.69
20	3.250	0.313	0.33	3.250	2.250	0.34	5/16	2.750	1.750	2.31	0.63	5/16-18	4.50	0.88
25	3.750	0.376	0.39	4.000	2.750	0.41	3/8	3.500	2.250	2.38	0.75	3/8-16	5.50	1.00

* Standard shafting
 ** Oversized shafting
 1 Model 15 with Cylinder Type 3A (3MA cylinder) has 3/8" NPTF ports.

All dimensions in inches unless otherwise noted.

HBR Series

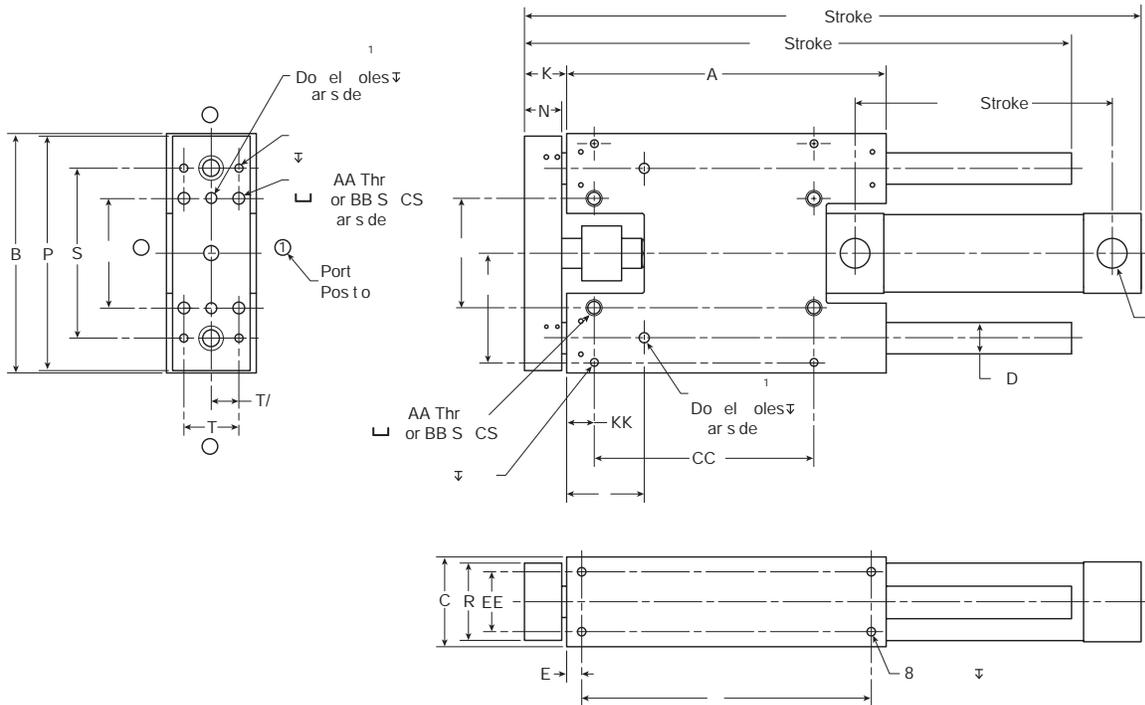

Model number	A	B	C	Ds*	Do**	E	F NPTF	F BSPP	K	L	M	N	P	R	S	T
15	8.00	6.00	2.25	20mm (0.79)	25mm (0.98)	0.375	1/4 1	1/4	1.06	9.94	11.19	0.94	5.88	1.94	4.250	1.375
20	10.00	7.25	2.75	25mm (0.98)	30mm (1.18)	0.500	3/8	1/4	1.31	12.39	13.44	1.19	7.13	2.44	5.000	1.750
25	12.00	9.00	3.25	30mm (1.18)	35mm (1.38)	0.500	3/8	3/8	1.56	14.82	15.82	1.44	8.88	2.88	6.500	2.000

Model number	U	V	W	X	Y	AA	BB	CC	EE	FF	GG	HH	JJ	KK
15	2.750	0.251	0.27	2.750	1.938	0.28	1/4	5.500	1.500	2.31	0.50	1/4-20	7.25	0.69
20	3.250	0.313	0.33	3.250	2.250	0.34	5/16	7.250	1.750	2.31	0.63	5/16-18	9.00	0.88
25	3.750	0.376	0.39	4.000	2.760	0.41	3/8	9.000	2.250	2.38	0.75	3/8-16	11.00	1.00

* Standard shafting
 ** Oversized shafting
 1 Model 15 with Cylinder Type 3A (3MA cylinder) has 3/8" NPTF ports.

All dimensions in inches unless otherwise noted.

B
 Guided Cylinders
 Actuator Products

P5T Series


P5L Series

HB Series

P5E Series

Horizontal Load Capacity & Deflection with Standard Shafting

The graphs illustrate the side load vs. actuator stroke for the three HB slide sizes. Applied loads will cause a slight deflection of the support rods. The graphs include the weight of the support rods and tooling plate and are based on a bearing life equivalent to 10 million cycles for dynamic conditions. Higher dynamic loads will reduce cycle life. For static loads, multiply the information in the graph by 1.5.









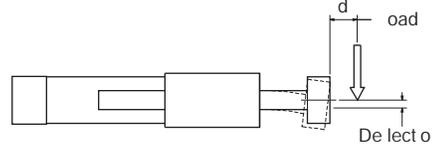


Note: Actuator life may vary depending on the severity of the following variables:

- Acceleration
- Velocity
- Vibration
- Orientation


EXAMPLE:
 An HBT15 with ball bearings and a "stroke+d" of 12" would have a load capacity of 20 lbs.

B	Guided Cylinders
	Actuator Products
	Series
	PST
	Series
	P5L
	Series
	HB
	Series
	P5E
	Series

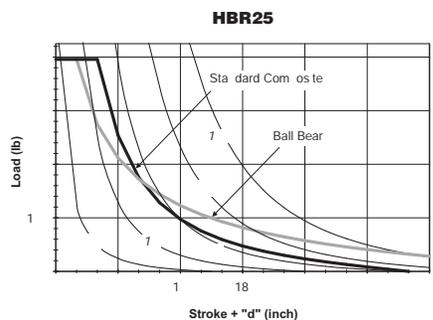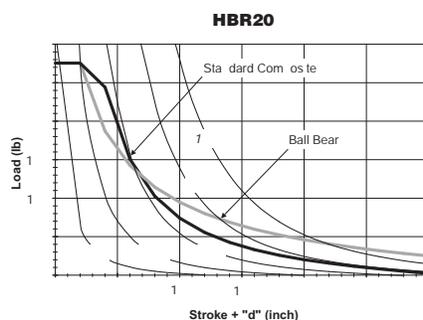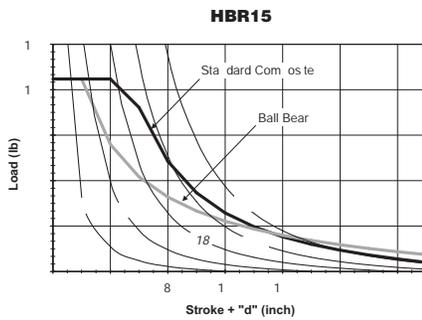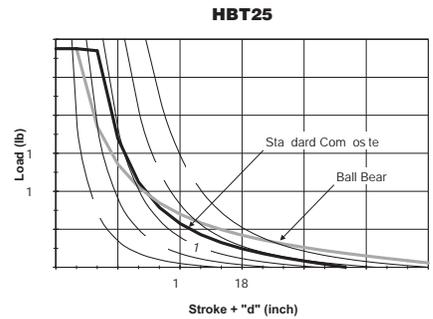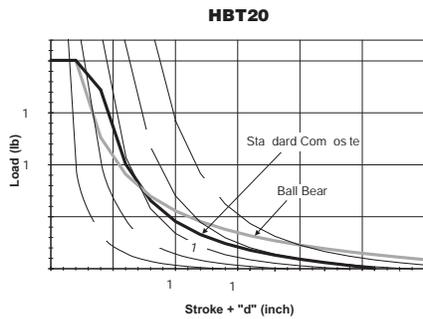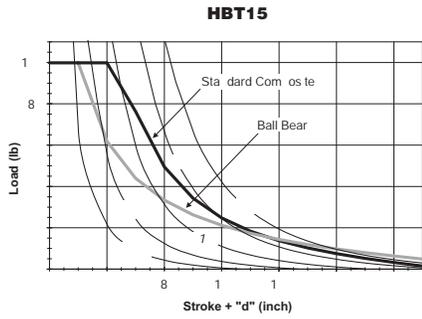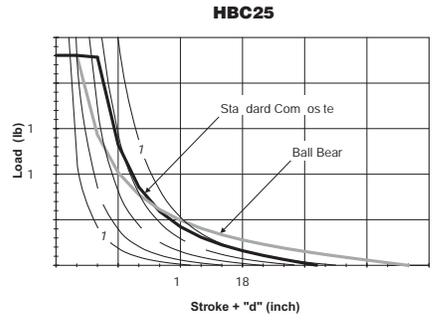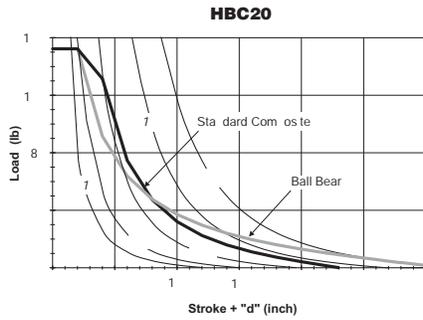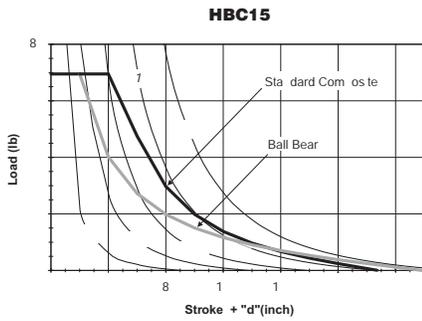

Horizontal Load Capacity & Deflection with Oversized Shafting


The graphs illustrate the side load vs. actuator stroke for the three HB slide sizes. Applied loads will cause a slight deflection of the support rods. Deflection distance is also shown. The graphs include the weight of the support rods and tooling plate and are based on a bearing life equivalent to 10 million cycles for dynamic conditions. Higher dynamic loads will reduce cycle life. For static loads, multiply the information in the graph by 1.5.

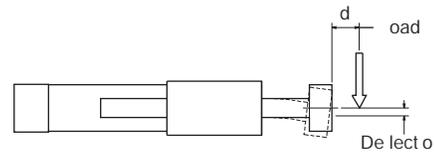

Note: Actuator life may vary depending on the severity of the following variables:

- Acceleration
- Velocity
- Vibration
- Orientation

EXAMPLE:
 An HBT15 with oversized composite bushings and a “stroke+d” of 8” would have a load capacity of 60 lbs.

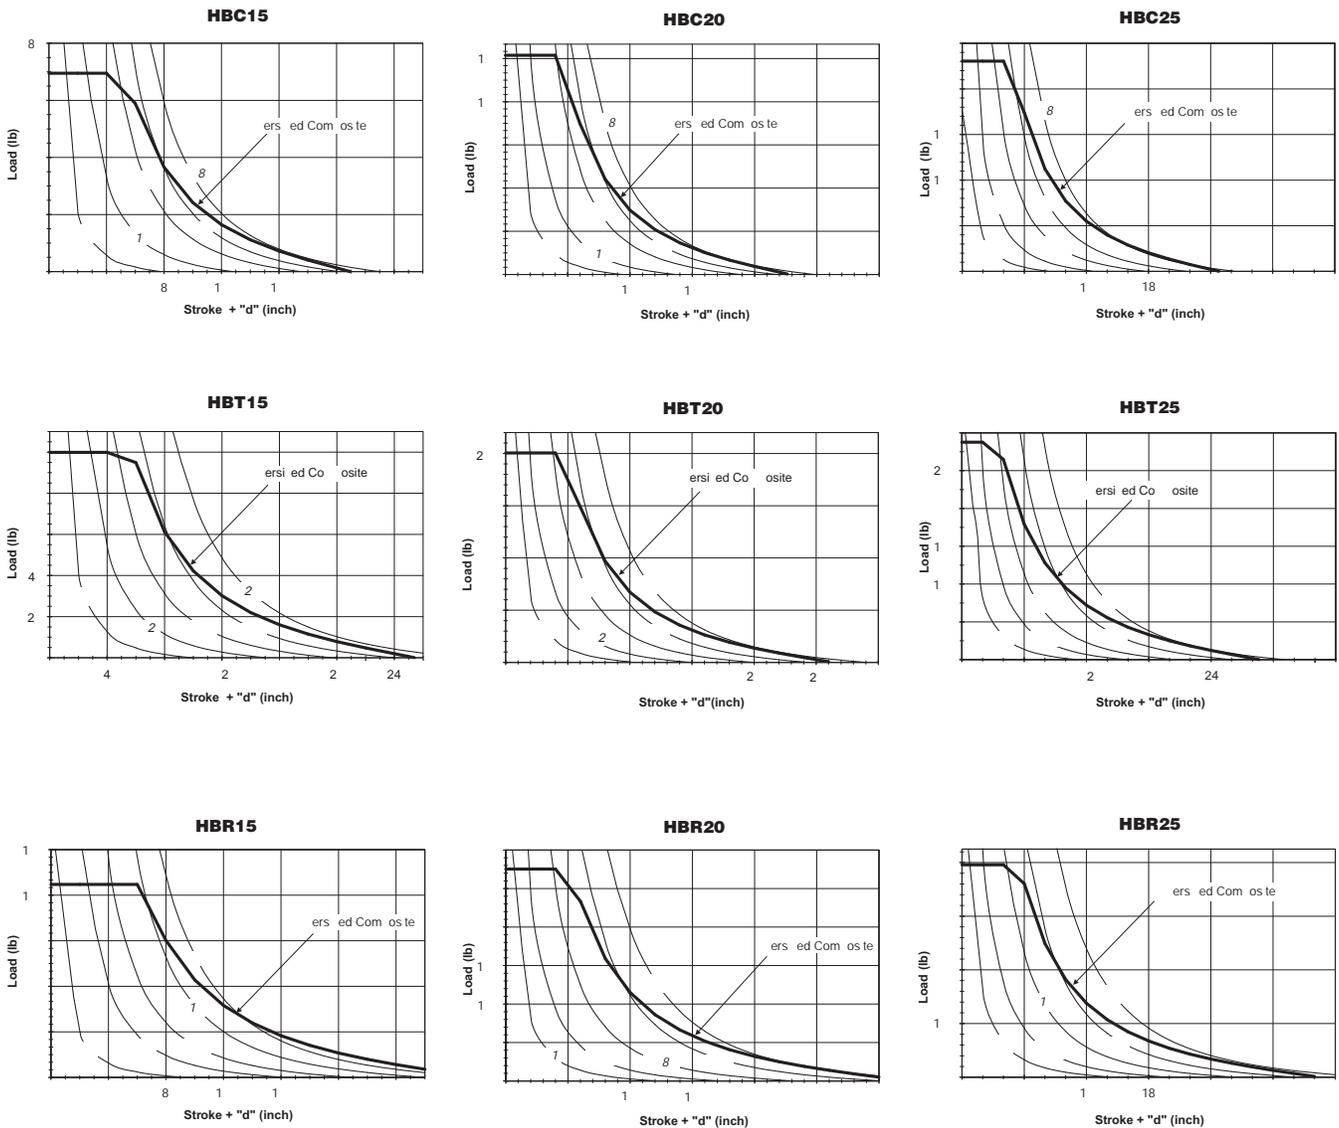


B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	



Asymmetrical Torque Capacity

Asymmetrical loading occurs when the load is applied to one side of the unit. HB Series units can resist torsional loads that are asymmetrical. The graphs show torsional load capacity for both standard and oversized shafting under dynamic conditions. For static applications, multiply the information in the graphs by 1.5. The vertical load for HBN does not include the weight of the tool plate and support rods.










Torsional Load

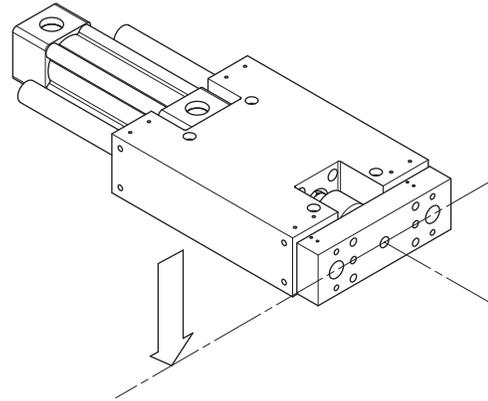

Note: Actuator life may vary depending on the severity of the following variables:

- Acceleration
- Velocity
- Vibration
- Orientation

B	Guided Cylinders
	Actuator Products
PST	Series
P5L	Series
HB	Series
P5E	Series

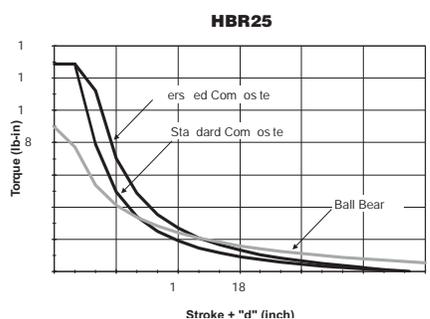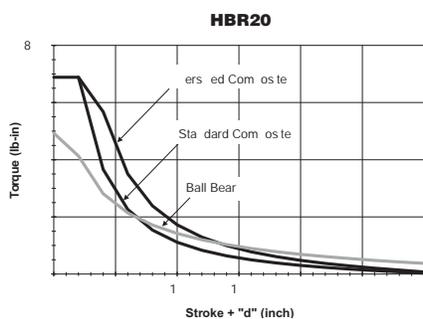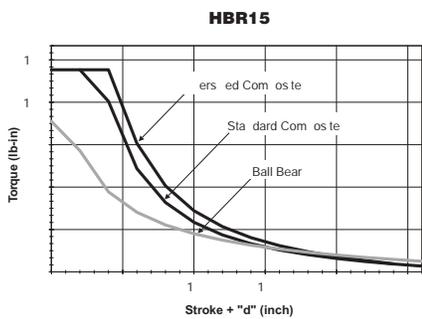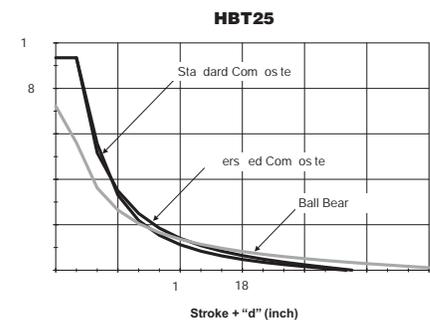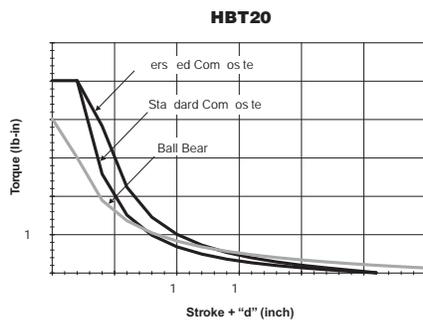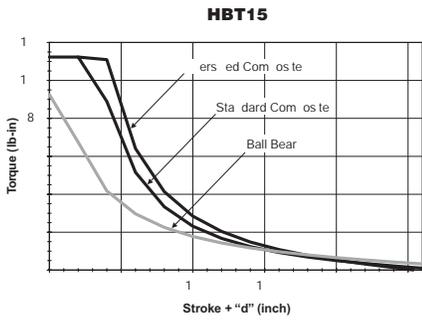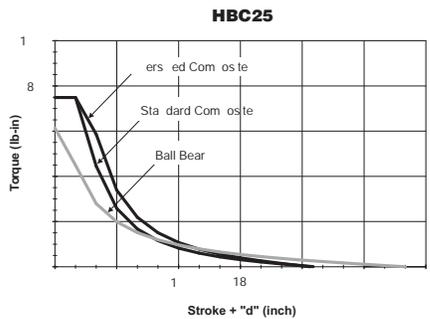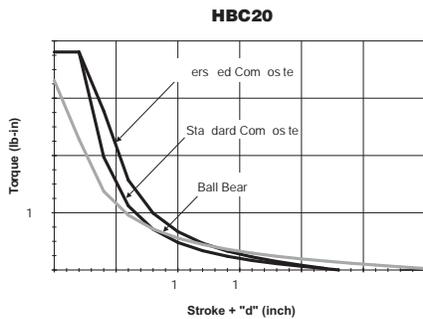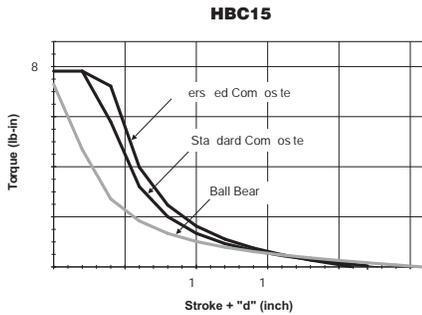


Vertical Eccentric Load Capacity










HB Series units mounted vertically will have the same eccentric load capacity regardless of orientation. The graphs provide maximum load capacity for an eccentric mounted load on a 4" stroke cylinder. The load is assumed to be mounted at the face of the tooling plate.

Note: Actuator life may vary depending on the severity of the following variables:

- Acceleration
- Velocity
- Vibration

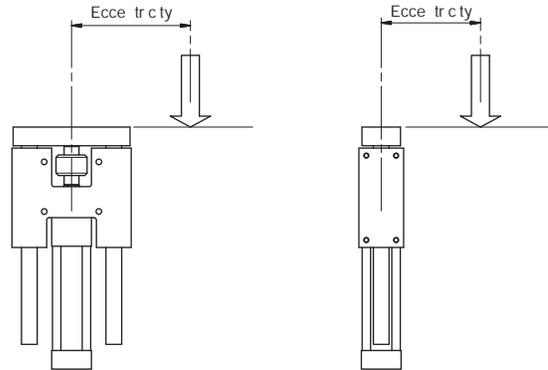

EXAMPLE:
 An HBT15 with ball bearings carrying an eccentric load with an eccentricity distance of 15" would have a load capacity of 40 lbs.

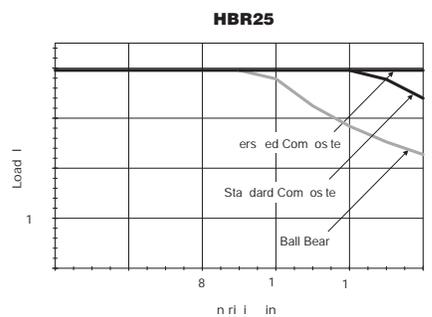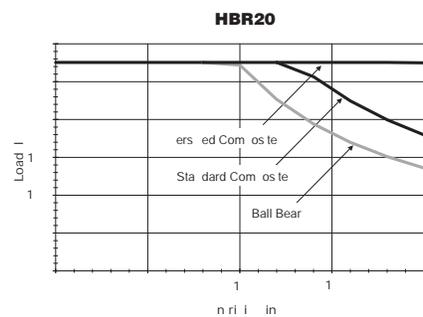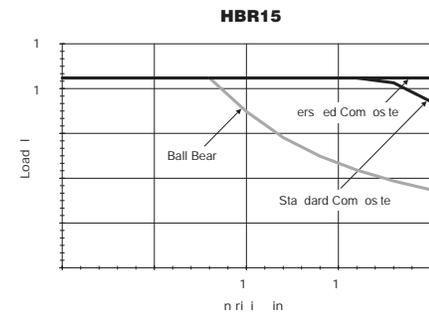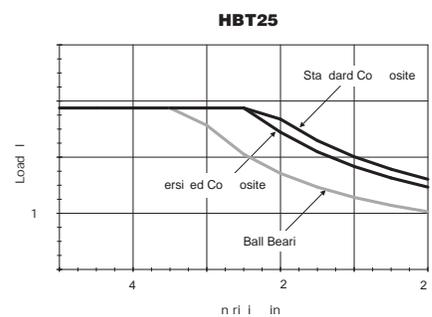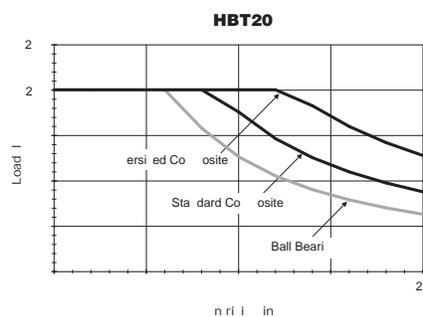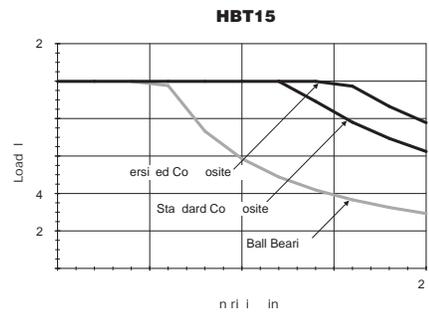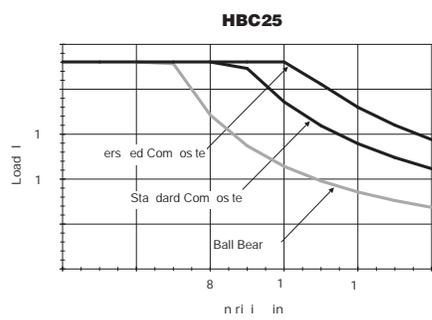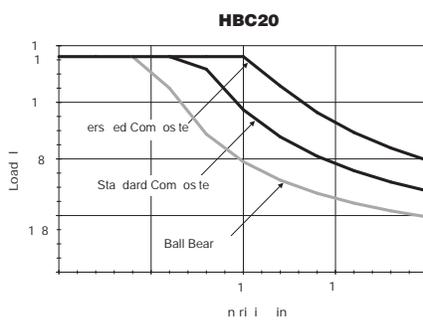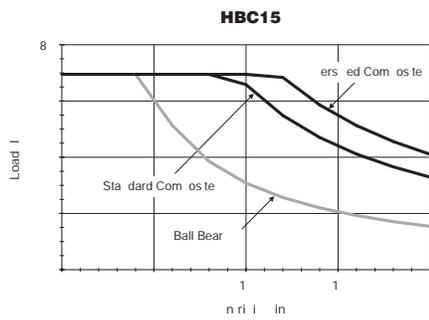

B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

P5E Series

- Low profile guided assembly
- Powered by the P1D cylinder
- Bore sizes 32, 40, 50, 63, 80 and 100mm
- Strokes to any practical length
- Rod lock options available
- Composite and ball bearing options available



Operating information

Operating pressure:	145 PSIG (10 bar) maximum
Temperature range:	14°F to 165°F (-10°C to 74°C)
Filtration requirements:	40 micron, dry filtered air

Ordering information

P5E	-	J	032	F	G	N	0250																														
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Shaft / bearing type</th> </tr> </thead> <tbody> <tr> <td>J</td> <td>Composite bearing, chrome plated standard shaft</td> </tr> <tr> <td>M</td> <td>Composite bearing, chrome plated oversize shaft ¹</td> </tr> <tr> <td>C</td> <td>Composite bearing, stainless steel shaft</td> </tr> <tr> <td>H</td> <td>Ball bearing, stainless steel shaft</td> </tr> </tbody> </table>		Shaft / bearing type		J	Composite bearing, chrome plated standard shaft	M	Composite bearing, chrome plated oversize shaft ¹	C	Composite bearing, stainless steel shaft	H	Ball bearing, stainless steel shaft	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Bore size</th> </tr> </thead> <tbody> <tr> <td>032</td> <td>32mm</td> </tr> <tr> <td>040</td> <td>40mm</td> </tr> <tr> <td>050</td> <td>50mm</td> </tr> <tr> <td>063</td> <td>63mm</td> </tr> <tr> <td>080</td> <td>80mm</td> </tr> <tr> <td>100</td> <td>100mm</td> </tr> </tbody> </table>		Bore size		032	32mm	040	40mm	050	50mm	063	63mm	080	80mm	100	100mm	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Stroke length</th> </tr> </thead> <tbody> <tr> <td colspan="2">Specify whole millimeters, i.e. 0250 = 250mm stroke</td> </tr> </tbody> </table>		Stroke length		Specify whole millimeters, i.e. 0250 = 250mm stroke			
Shaft / bearing type																																					
J	Composite bearing, chrome plated standard shaft																																				
M	Composite bearing, chrome plated oversize shaft ¹																																				
C	Composite bearing, stainless steel shaft																																				
H	Ball bearing, stainless steel shaft																																				
Bore size																																					
032	32mm																																				
040	40mm																																				
050	50mm																																				
063	63mm																																				
080	80mm																																				
100	100mm																																				
Stroke length																																					
Specify whole millimeters, i.e. 0250 = 250mm stroke																																					
				<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Bumpers / Adjustable Stop Collars</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>None</td> </tr> <tr> <td>B</td> <td>Bumpers, retract only ²</td> </tr> <tr> <td>E</td> <td>Bumpers and adjustable stop collars, extend only</td> </tr> <tr> <td>T</td> <td>Bumpers both ends, adjustable stop collars on extend ²</td> </tr> <tr> <td>R</td> <td>Bumpers and adjustable stop collars on retract ²</td> </tr> <tr> <td>S</td> <td>Bumpers and adjustable stop collars both ends ²</td> </tr> </tbody> </table>		Bumpers / Adjustable Stop Collars		N	None	B	Bumpers, retract only ²	E	Bumpers and adjustable stop collars, extend only	T	Bumpers both ends, adjustable stop collars on extend ²	R	Bumpers and adjustable stop collars on retract ²	S	Bumpers and adjustable stop collars both ends ²																		
Bumpers / Adjustable Stop Collars																																					
N	None																																				
B	Bumpers, retract only ²																																				
E	Bumpers and adjustable stop collars, extend only																																				
T	Bumpers both ends, adjustable stop collars on extend ²																																				
R	Bumpers and adjustable stop collars on retract ²																																				
S	Bumpers and adjustable stop collars both ends ²																																				
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Cylinder type ³</th> </tr> </thead> <tbody> <tr> <td>F</td> <td>P1D removable gland cylinder</td> </tr> <tr> <td>G</td> <td>P1D removable gland cylinder with cushions</td> </tr> <tr> <td>K</td> <td>P1D rod lock cylinder with cushions</td> </tr> <tr> <td>S</td> <td>P1D manual override rod lock cylinder with cushions</td> </tr> <tr> <td>Q</td> <td>No cylinder</td> </tr> <tr> <td>X</td> <td>Special – please specify</td> </tr> </tbody> </table>		Cylinder type ³		F	P1D removable gland cylinder	G	P1D removable gland cylinder with cushions	K	P1D rod lock cylinder with cushions	S	P1D manual override rod lock cylinder with cushions	Q	No cylinder	X	Special – please specify	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Port Style</th> </tr> </thead> <tbody> <tr> <td>H</td> <td>NPTF (std)</td> </tr> <tr> <td>G</td> <td>BSPP</td> </tr> <tr> <td>N</td> <td>NPTF with flow controls (std. female ports)</td> </tr> <tr> <td>B</td> <td>BSPP with flow controls (ISO female ports)</td> </tr> <tr> <td>F</td> <td>Flow controls, NPTF port, prestolok tube (inch)</td> </tr> <tr> <td>P</td> <td>Flow controls, BSPP port, prestolok tube (mm)</td> </tr> </tbody> </table>		Port Style		H	NPTF (std)	G	BSPP	N	NPTF with flow controls (std. female ports)	B	BSPP with flow controls (ISO female ports)	F	Flow controls, NPTF port, prestolok tube (inch)	P	Flow controls, BSPP port, prestolok tube (mm)				
Cylinder type ³																																					
F	P1D removable gland cylinder																																				
G	P1D removable gland cylinder with cushions																																				
K	P1D rod lock cylinder with cushions																																				
S	P1D manual override rod lock cylinder with cushions																																				
Q	No cylinder																																				
X	Special – please specify																																				
Port Style																																					
H	NPTF (std)																																				
G	BSPP																																				
N	NPTF with flow controls (std. female ports)																																				
B	BSPP with flow controls (ISO female ports)																																				
F	Flow controls, NPTF port, prestolok tube (inch)																																				
P	Flow controls, BSPP port, prestolok tube (mm)																																				

¹ Bumpers and adjustable stop collars are not available with oversize shaft option.


² These options will increase the cylinder length. To achieve a specific usable stroke length with these options, add the corresponding value(s) in the adder table, please reference catalog 0900P-E, page F156 to the desired stroke length. See Bumper Options for explanation.
 Adders are not used when P1D Rod Lock (K) or P1D Manual Override Rod Lock (S) are specified with bumpers.

³ Tie Rod Version or composite piston option must be specified as Special (X).

Sensors

For sensors see page B339.

B
 Guided Cylinders
 Actuator Products
 P5T Series
 P5L Series
 HB Series
 P5E Series

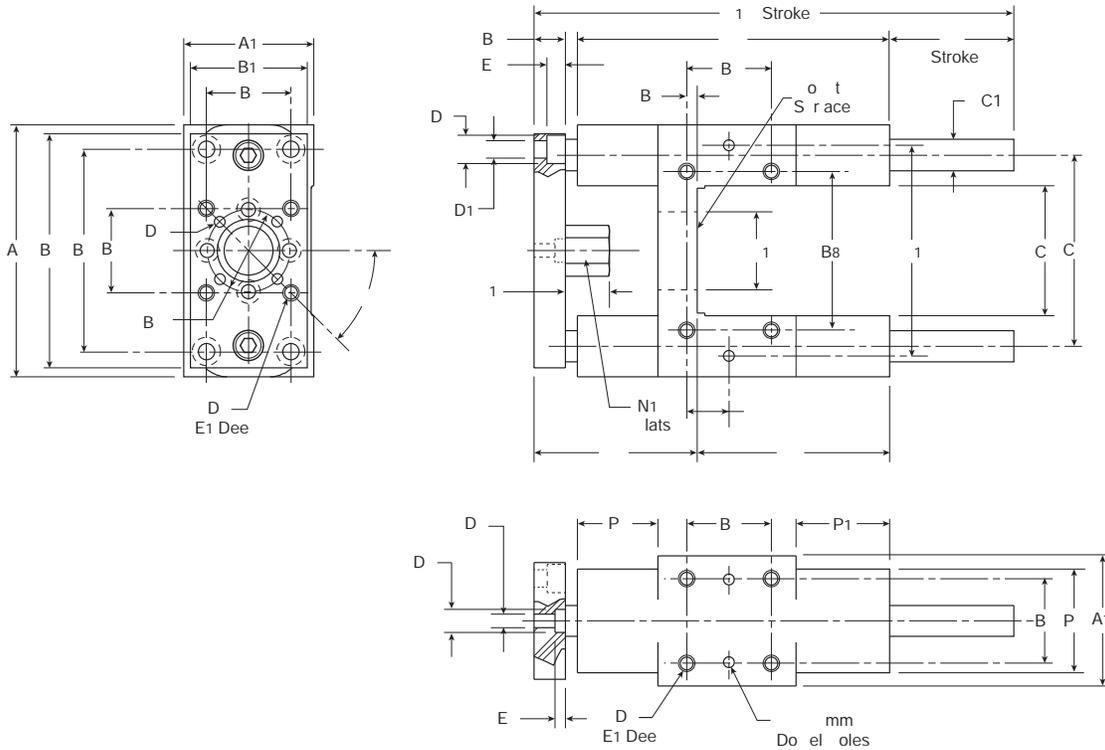

Metric (inch)

Bore size	A1	A2	B1	B2	B3	B4	ØB5	B6	B7	B8	ØC1 std.	ØC1 O.S.	C2	C3	ØD1	ØD2	ØD3	ØD4	ØD5	ØD6
32	50 (1.97)	97 (3.82)	45 (1.77)	92 (3.62)	78 (3.07)	32.5 (1.28)	31.5 (1.24)	4 (0.16)	12.7 (0.50)	61 (2.40)	12 (0.47)	16 (0.63)	73.5 (2.89)	50 (1.97)	6.6 (0.26)	11 (0.43)	5.2 (0.20)	9 (0.35)	M6 x 1.00	4 (0.16)
40	58 (2.28)	115 (4.53)	50.8 (2.00)	110 (4.33)	84 (3.31)	38 (1.50)	31.5 (1.24)	11 (0.43)	12.7 (0.50)	69 (2.72)	16 (0.63)	20 (0.79)	86.5 (3.41)	58 (2.28)	6.6 (0.26)	11 (0.43)	5.2 (0.20)	9 (0.35)	M6 x 1.00	4 (0.16)
50	70 (2.76)	137 (5.39)	63 (2.48)	132 (5.20)	100 (3.94)	46.5 (1.83)	50 (1.97)	19 (0.75)	16 (0.63)	85 (3.35)	20 (0.79)	25 (0.98)	103.5 (4.07)	70 (2.76)	9 (0.35)	14 (0.55)	6.4 (0.25)	11 (0.43)	M8 x 1.25	4 (0.16)
63	85 (3.35)	152 (5.98)	82.5 (3.25)	145 (5.71)	105 (4.13)	56.5 (2.24)	50 (1.97)	15 (0.59)	16 (0.63)	100 (3.94)	20 (0.79)	25 (0.98)	118.5 (4.67)	85 (3.35)	9 (0.35)	14 (0.55)	6.4 (0.25)	11 (0.43)	M8 x 1.25	4 (0.16)
80	105 (4.13)	189 (7.44)	100 (3.94)	180 (7.09)	130 (5.12)	72 (2.83)	76 (2.99)	21 (0.83)	19 (0.75)	130 (5.12)	25 (0.98)	30 (1.18)	147 (5.79)	105 (4.13)	11 (0.43)	17 (0.67)	8.4 (0.33)	14 (0.55)	M10 x 1.50	6 (0.24)
100	130 (5.12)	213 (8.39)	120 (4.72)	200 (7.87)	150 (5.91)	89 (3.50)	76 (2.99)	24.5 (0.97)	19 (0.75)	150 (5.91)	25 (0.98)	30 (1.18)	171.5 (6.75)	130 (5.12)	11 (0.43)	17 (0.67)	8.4 (0.33)	14 (0.55)	M10 x 1.50	6 (0.24)

Bore size	E1	E2	E3	ØF1	G1	H1	H2	L1	L2	L3	L4	L5	N1	P1	P2	P3	Port size	Piston rod thread
32	12 (0.47)	7 (0.28)	4 (0.16)	30 (1.18)	17 (0.67)	81 (3.19)	16 (0.63)	153 (6.02)	120 (4.72)	17 (0.67)	71 (2.80)	64.7 (2.55)	17 (0.67)	36 (1.42)	31 (1.22)	40 (1.57)	1/8	M10 x 1.25
40	12 (0.47)	7 (0.28)	4 (0.16)	35 (1.38)	24 (0.94)	99 (3.90)	19 (0.75)	166 (6.54)	130 (5.12)	20 (0.79)	71 (2.80)	74.7 (2.94)	17 (0.67)	36 (1.42)	36 (1.42)	44 (1.73)	1/4	M12 x 1.25
50	16 (0.63)	9 (0.35)	9 (0.35)	40 (1.57)	27 (1.06)	119 (4.69)	23 (0.91)	194 (7.64)	150 (5.90)	25 (0.98)	79 (3.11)	90 (3.54)	24 (0.94)	42 (1.65)	44 (1.73)	50 (1.97)	1/4	M16 x 1.5
63	16 (0.63)	9 (0.35)	9 (0.35)	45 (1.77)	27 (1.06)	132 (5.20)	28 (1.10)	224 (8.82)	180 (7.09)	25 (0.98)	109 (4.29)	90 (3.54)	24 (0.94)	58 (2.28)	44 (1.73)	60 (2.36)	3/8	M16 x 1.5
80	20 (0.79)	11 (0.43)	5 (0.19)	45 (1.77)	32 (1.26)	166 (6.54)	36 (1.42)	252 (9.92)	200 (7.87)	30 (1.18)	113 (4.45)	109 (4.29)	30 (1.18)	50 (1.97)	52 (2.05)	70 (2.76)	3/8	M20 x 1.5
100	20 (0.79)	11 (0.43)	5 (0.20)	55 (2.17)	32 (1.26)	190 (7.48)	45 (1.77)	272 (10.71)	220 (8.66)	30 (1.18)	128 (5.04)	114 (4.49)	30 (1.18)	49 (1.93)	51 (2.01)	70 (2.76)	1/2	M20 x 1.5

B
 Guided Cylinders
 Actuator Products

P5T Series

P5L Series

HB Series


P5E Series









Maximum Load Capacity with Standard Shaft

The following curves are based on 10 million cycles at a speed of 0.20 m/s (40 fpm). Higher dynamic loads will reduce cycle life. For static conditions, multiply the information in the graphs by 1.5.

EXAMPLE: A P5E with 40mm bore, composite bushings and a “stroke+d” of 400mm will have a load capacity of 48N.

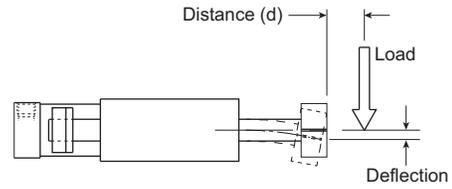








B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	

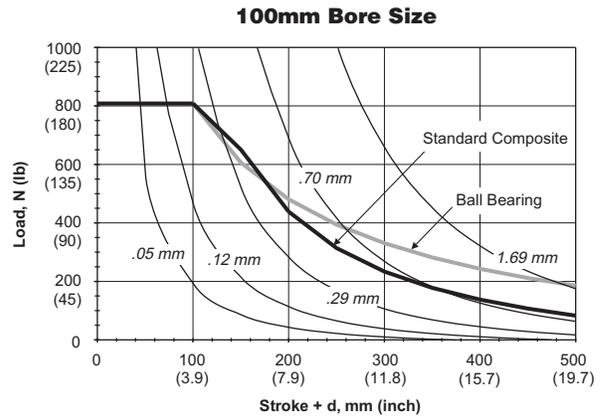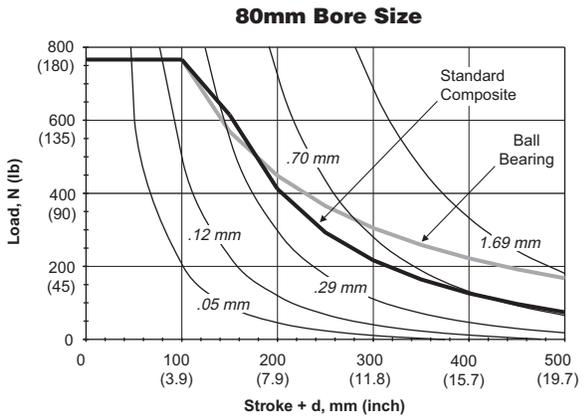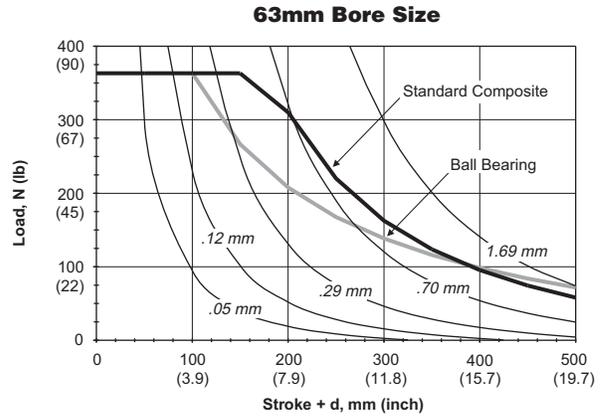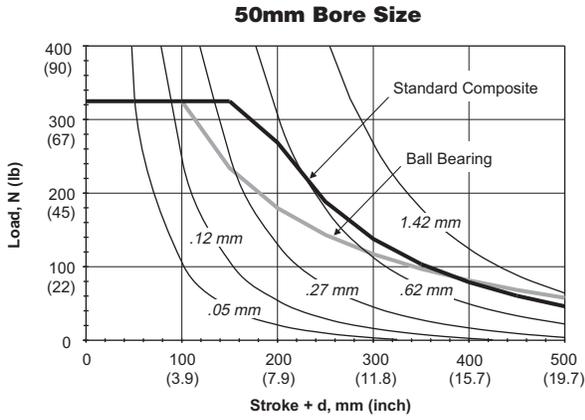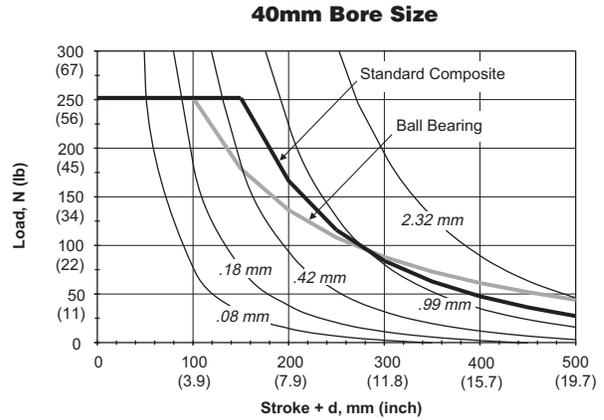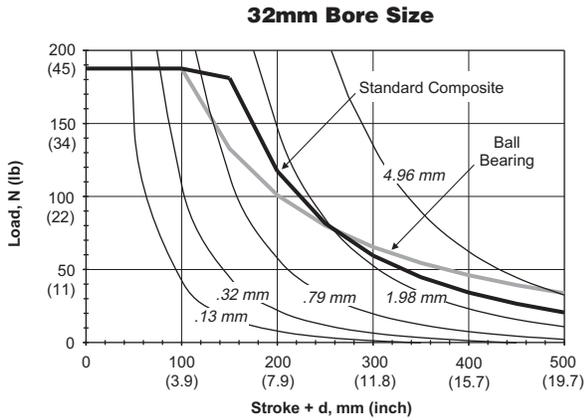

Maximum Load Capacity with Oversized Shaft

The following curves are based on 10 million cycles at a speed of 0.20 m/s (40 fpm). Higher dynamic loads will reduce cycle life. For static conditions, multiply the information in the graphs by 1.5.

EXAMPLE: A P5E with 63mm bore, oversized support shafts and a “stroke+d” of 300mm would have a load capacity of 200N.

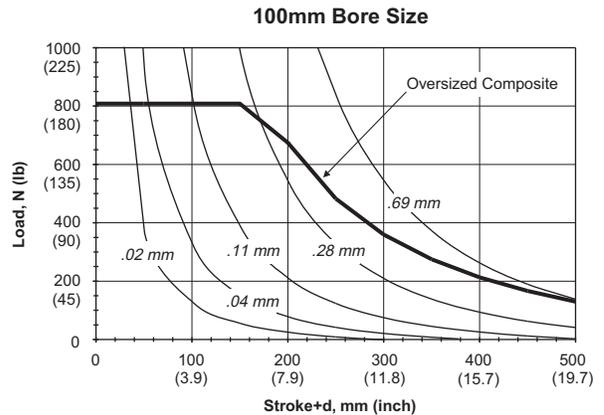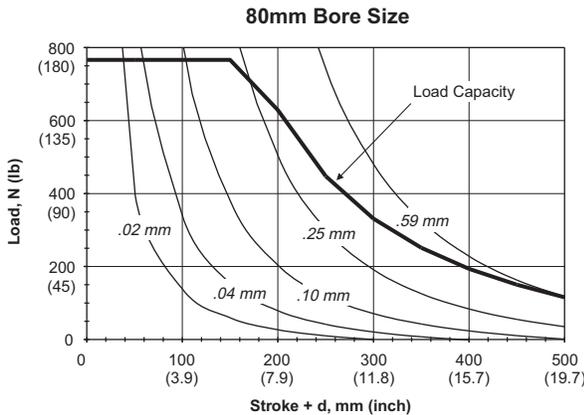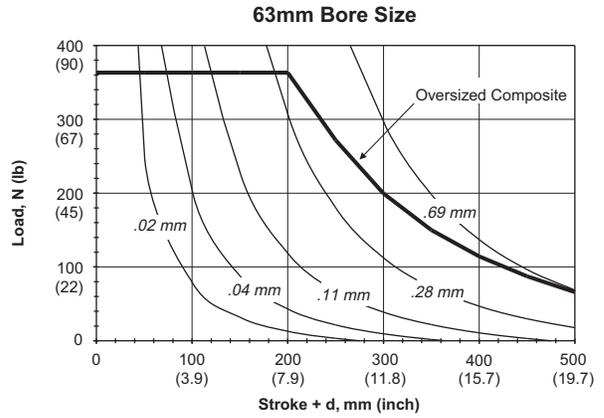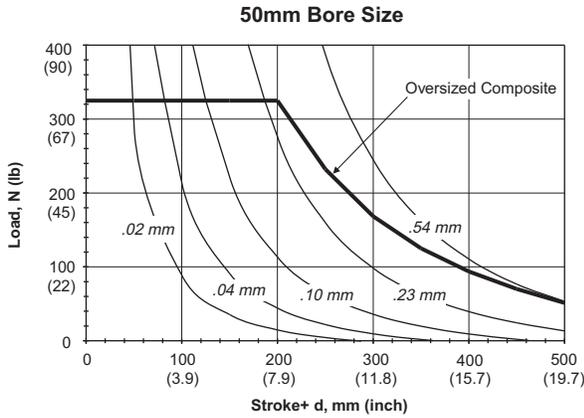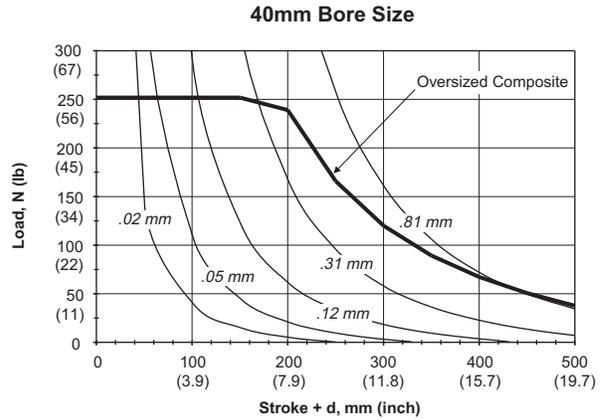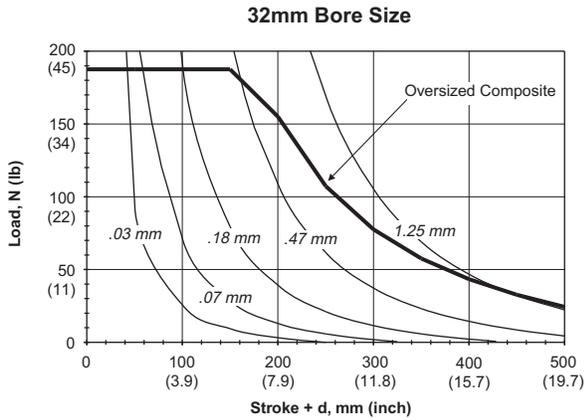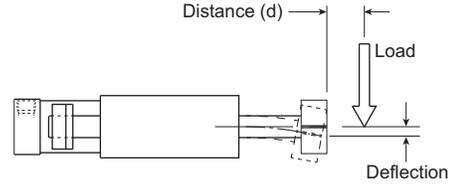


B	Guided Cylinders Actuator Products
	P5T Series
P5L Series	
HB Series	
P5E Series	







Asymmetrical Torque Capacity

Asymmetrical loading occurs when an off-center load is applied to the unit. P5E Series units can resist torsional loads that are asymmetrical.

EXAMPLE: A P5E with 63mm bore, ball bearings and a “stroke + d” of 300mm would have an asymmetrical torque capacity of 5 Nm.

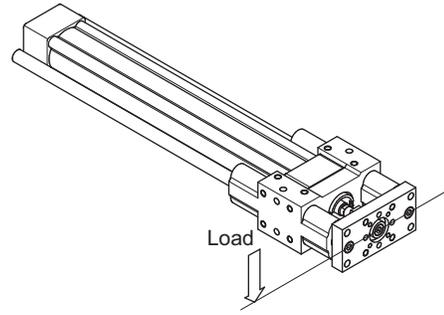

B	Guided Cylinders
	Actuator Products
Series	P5T
Series	P5L
Series	HB
Series	P5E

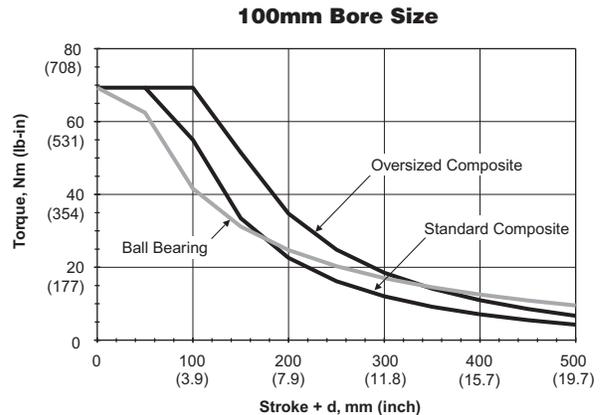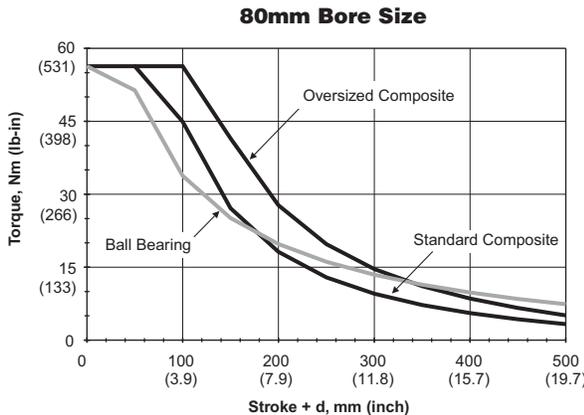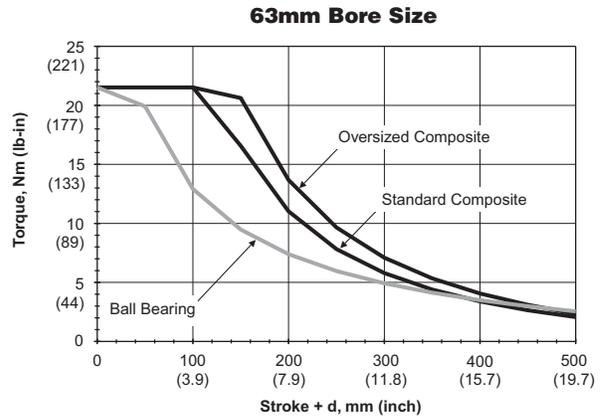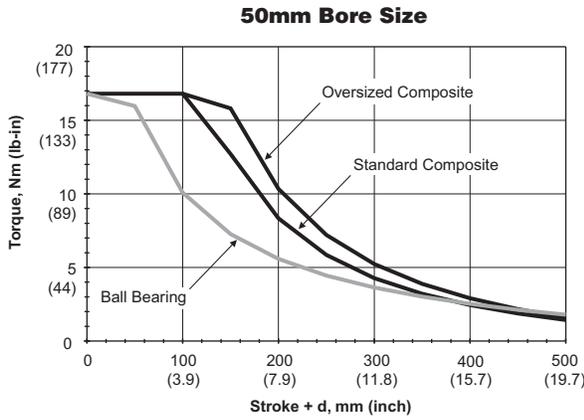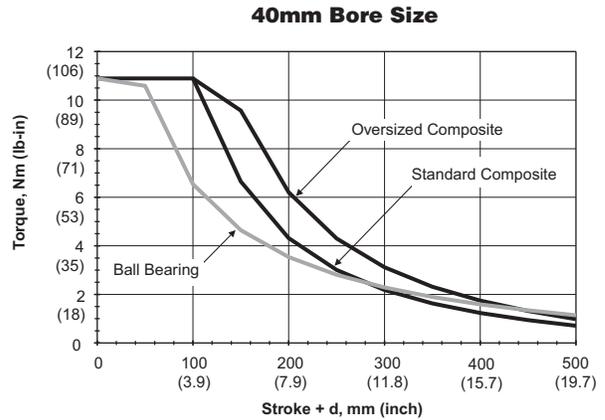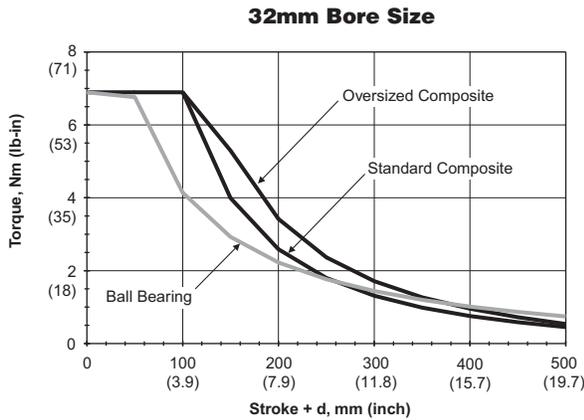








Vertical Eccentric Load Capacity

P5E Series units mounted vertically will have the same eccentric load capacity regardless of orientation. The graphs provide maximum load capacity for an eccentric mounted load. The load is assumed to be mounted at the face of the tooling plate.

These load curves illustrate load ratings based on the bearing system of the product. Load rating is a key selection criterion but is not the only one to consider in the selection of a product.

Note: Charts are based on 100mm of stroke.

EXAMPLE: A P5E with a 40mm bore carrying an eccentric load located 300mm from the centerline has a capacity of approximately 200N (45 lbs).

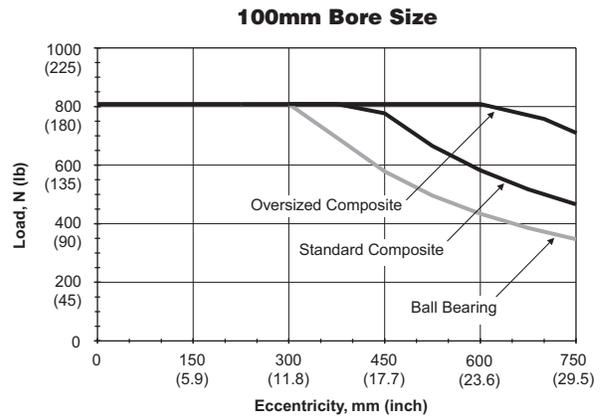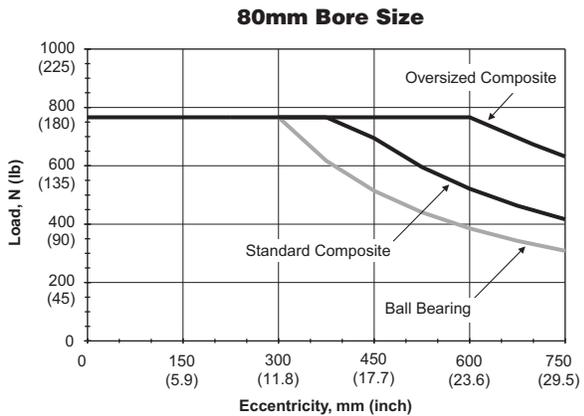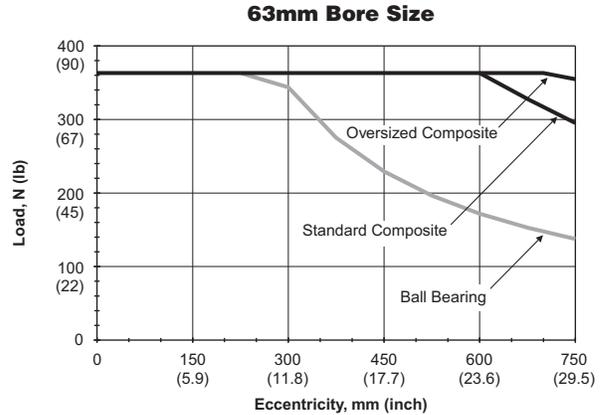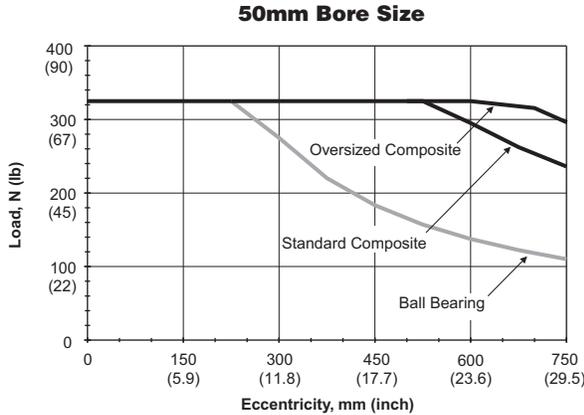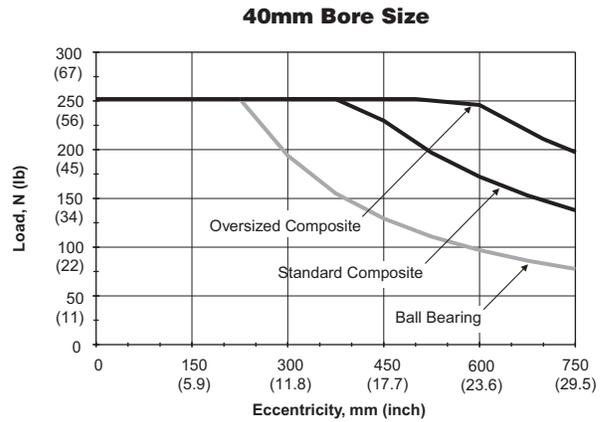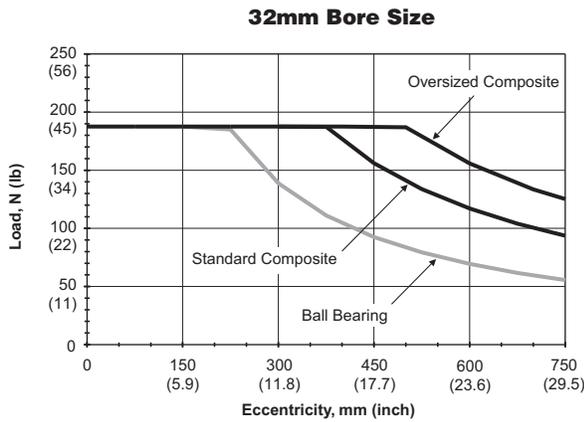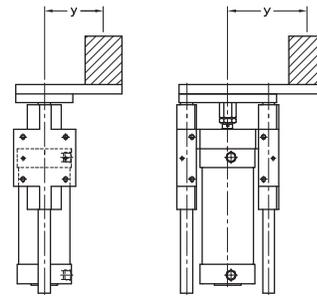

B	Guided Cylinders
	Actuator Products
P5T	Series
P5L	Series
HB	Series
P5E	Series